



AVVENI

CEILING² symmetrical

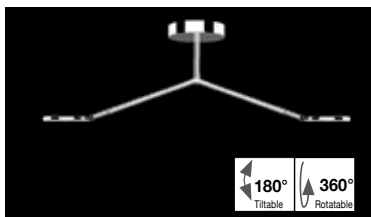


Product-information: Aluminum structure with 2 light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

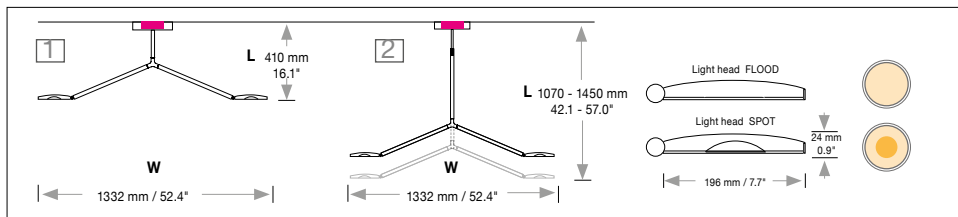

STRUCTURE


Type	L / W mm	L / W inches	LED Watt	weight kg ² / lbs ²	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
1	L 410 / W 1332	L 16.1 / W 52.4"	25 W	3.2 / 7.1	1117.	XX.	XX.	XX.	XX.
2	L 1070 - 1450 / W 1332	L 42.1 - 57.0 / W 52.4"	25 W	3.5 / 7.7	1118.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matte RAL 9003 14 black matte 22 aluminum polished	Standard	XXXX.	12	XX.	XX.	XX.	XX.	
Dimmer	0-10 V	Standard	XXXX.	XX.	05	XX.	XX.		
Power Supply Cable	No power supply cable		XXXX.	XX.	XX.	00	XX.		
Mounting Version	P Direct ceiling mounting with power supply unit in canopy	Standard	XXXX.	XX.	XX.	XX.	0P		



Order No. STRUCTURE

LIGHT HEAD

Type	Finish 2	Finish 3	LED	Kelvin	Beam angle				LIGHT HEAD						
									Type No.	Finish 2	Finish 3	LED	Kelvin	Beam angle	
									01	XX.	XX.	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	12 white matte RAL 9003 62 (14) black matte 22 aluminum polished	Finish 2 must be the same as finish 1	Standard	XX.	12	XX.	XX.	XX.	XX.	XX.	XX.	XX.	XX.	XX.	
Finish 3 Light head top cover	60 silver anodized 61 gold anodized 62 black anodized		Standard	XX.	XX.	60	XX.	XX.	XX.	XX.	XX.	XX.	XX.		
LED	SELV	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K		XX.	XX.	XX.	27	XX.	XX.	XX.	XX.	XX.	XX.		
Beam Angle		FLOOD 2 x 12.5 W 1282' Lumen SPOT 26° 12.5 W 1229' Lumen SPOT 34° 12.5 W 1229' Lumen	Standard	XX.	XX.	XX.	XX.	99	00	00	XX.	XX.	XX.		
				XX.	XX.	XX.	XX.	26	00	00	XX.	XX.	XX.		
				XX.	XX.	XX.	XX.	34	00	00	XX.	XX.	XX.		

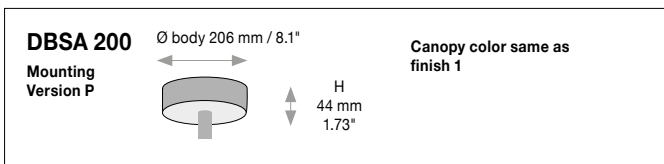

Quantity Order No. LIGHT HEAD **00 00**

Quantity Order No. LIGHT HEAD **00 00**

Flood and spot heads may be mixed within one structure

Input voltage for canopies is 120-277V