


## AVVENI PENDANT 18




**Product-information:** Aluminum structure with eighteen light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

**Design:** Ulrich Sattler | Michael Schmidt, Code2design

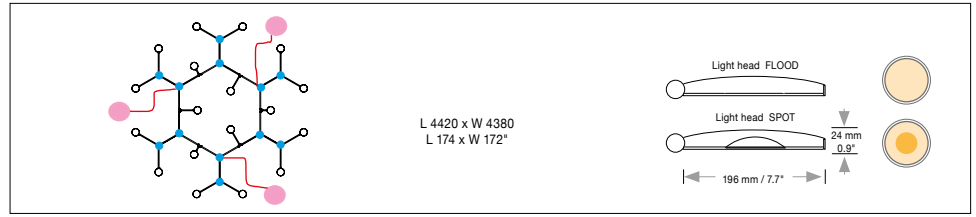

### STRUCTURE

| Type                      | L / W mm  | L / W inches       | LED Watt | weight kg <sup>2</sup> / lbs <sup>2</sup> | STRUCTURE       |          |                                     |                    |                  |            |
|---------------------------|---|--------------------|----------|---|-----------------|----------|-------------------------------------|--------------------|------------------|------------|
|                           |   |                    |          |   | Type No.        | Finish 1 | DIM.                                | Power Supply Cable | Mounting Version |            |
|                           | L 4420 / W 4380   | L 174.0 / W 172.0" | 225 W    | 20.0 / 44.1                               | <b>1156.</b>    | XX.      | XX.                                 | XX.                | XX.              |            |
| <b>Finish 1 Structure</b> | <b>12</b> white matte RAL 9003<br><b>14</b> black matte<br><b>22</b> aluminum polished  |                    |          |   | <b>Standard</b> | XXXX.    | <b>12</b><br><b>14</b><br><b>22</b> | XX.                | XX.              | XX.        |
| <b>Dimmer</b>             | <b>0-10 V</b>   |                    |          |   | <b>Standard</b> | XXXX.    | XX.                                 | <b>05</b>          | XX.              | XX.        |
| <b>Cable</b>              | power supply cables, silver 196.9" (5000mm)   |                    |          |   | <b>Standard</b> | XXXX.    | XX.                                 | XX.                | <b>70</b>        | XX.        |
| <b>Mounting Version</b>   | Suspension with 3 power supply cables 196.9" (5000mm) and external power supply units in separate canopies or suspended ceiling<br>Suspension with 3 steel cables 196.9" (5000mm) and external power supply unit in suspended ceiling |                    |          |   |                 | XXXX.    | XX.                                 | XX.                | XX.              | <b>0X.</b> |
|                           |   |                    |          |   |                 |          |                                     |                    |                  |            |



### LIGHT HEAD

| Type                                    | Finish 2   | Finish 3 | LED | LIGHT HEAD |            |  |
|---|--|----------|-----|------------|------------|--|
|   |  |          |     | Kelvin     | Beam angle |  |
|   |  |          |     |            |            |  |
| <b>Finish 2 Light head outside ring</b> | <b>12</b> white matte RAL 9003<br><b>62 (14)</b> black matte<br><b>22</b> aluminum polished<br>Finish 2 must be the same as finish 1 |          |     |            |            |  |
| <b>Finish 3 Light head top cover</b>    | <b>60</b> silver anodized<br><b>61</b> gold anodized<br><b>62</b> black anodized   |          |     |            |            |  |
| <b>LED</b>                              | <b>Extra warm-white 2700 K</b><br><b>Warm-white 3000 K</b><br><b>Neutral-white 4000 K</b>  |          |     |            |            |  |
| <b>Beam Angle</b>                       | <b>FLOOD 18x12.5 W   1282' Lumen</b><br><b>SPOT 26° 12.5 W   1229' Lumen</b><br><b>SPOT 34° 12.5 W   1229' Lumen</b>                 |          |     |            |            |  |

Quantity  Order No. LIGHT HEAD  **00 00**

Quantity  Order No. LIGHT HEAD  **00 00**

Flood and spot heads may be mixed within one structure

Quantity  Order No. Accessories (page 2)  **00 00 00**


## AVVENI

PENDANT 18




**Product-information:** Aluminum structure with eighteen light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

**Design:** Ulrich Sattler | Michael Schmidt, Code2design

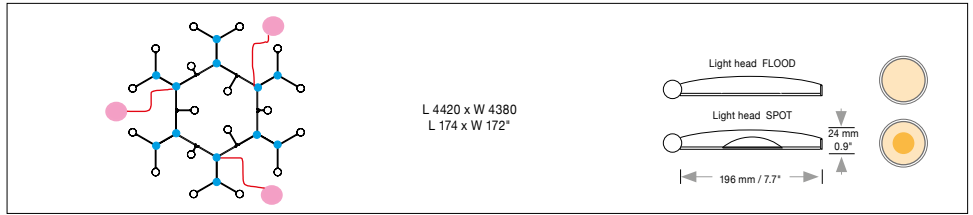


## MOUNTING VERSION

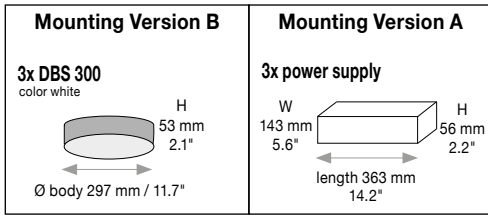

Input voltage for all external power supply units and canopies is 120-277V

## ACCESSORIES

### Power cable cover plate



Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover.

**Included with 3x mounting version A/B.**

white

200. 00.00.00.12