



AVVENI
PENDANT³



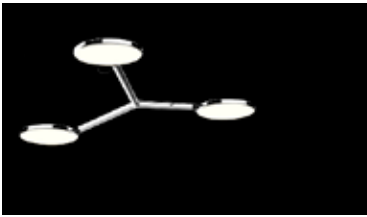





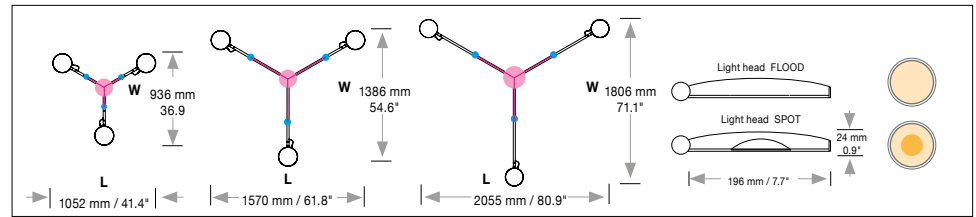




Product-information: Aluminum structure with three light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design














STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ² / lbs ²	Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
	L 1052 / W 936	L 41.4 / W 36.9"	37.5 W	2.3 / 5.1	1125.	xx.	xx.	xx.	xx.
	L 1570 / W 1386	L 61.8 / W 54.6"	37.5 W	2.6 / 5.7	1126.	xx.	xx.	xx.	xx.
	L 2055 / W 1806	L 80.9 / W 71.1"	37.5 W	2.8 / 6.2	1127.	xx.	xx.	xx.	xx.
Finish 1 Structure	 12 white matte RAL 9003	 14 black matte	 22 aluminum polished	Standard	xxxx.	12	xx.	xx.	xx.
					xxxx.	14	xx.	xx.	xx.
					xxxx.	22	xx.	xx.	xx.
Dimmer		0-10 V		Standard	xxxx.	xx.	05	xx.	xx.
Power Supply Cable	power supply cable, silver 196.9" (5000mm), mounting version (A/B) No power supply cable, current-carrying suspension (F + R) 118.1" (3000mm) (T) 196.9 / 118.1" (5000 / 3000mm)			Standard	xxxx.	xx.	xx.	70	xx.
					xxxx.	xx.	xx.	00	xx.
Mounting Version	 Optional Suspension with 3 steel cables 196.9" (5000mm) and external power supply unit in separate canopy or suspended ceiling				xxxx.	xx.	xx.	xx.	0
Standard	   				 <div> 0 </div> Order No. STRUCTURE				
	Suspension with 3 steel cables 196.9" (5000mm) Suspension with canopy and 3 current-carrying steel cables 118.1" (3000mm) Canopy suspension with pendant canopy and current-carrying steel cables (a) 196.9" (5000mm) + (b) 118.1" (3000mm) Suspension with 3 current-carrying steel cables 118.1" (3000mm) and 3 cavity ceiling boxes, power supply in suspended ceiling								



LIGHT HEAD

Type									angle						
Finish 2 Light head outside ring		12 white matte RAL 9003		62 (14) black matte		22 aluminum polished		Standard	XX.	XX.	XX.	XX.	XX.	XX.	XX.
									XX.	12	XX.	XX.	XX.	XX.	XX.
									XX.	62	XX.	XX.	XX.	XX.	XX.
									XX.	22	XX.	XX.	XX.	XX.	XX.
Finish 2 must be the same as finish 1									XX.	XX.	XX.	XX.	XX.	XX.	XX.
Finish 3 Light head top cover		60 silver anodized		61 gold anodized		62 black anodized		Standard	XX.	XX.	60	XX.	XX.	XX.	XX.
									XX.	XX.	61	XX.	XX.	XX.	XX.
									XX.	XX.	62	XX.	XX.	XX.	XX.
									XX.	XX.	XX.	XX.	XX.	XX.	XX.
LED CRI >95 SELV		Extra warm-white 2700 K		XX.	XX.	XX.	27	XX.	XX.	XX.					
		Warm-white 3000 K		XX.	XX.	XX.	30	XX.	XX.	XX.					
		Neutral-white 4000 K		XX.	XX.	XX.	40	XX.	XX.	XX.					
Beam Angle	FLOOD 3 x 12.5 W 1282¹ Lumen			Standard	XX.	XX.	XX.	XX.	99	00	00				
	SPOT 26° 12.5 W 1229¹ Lumen				XX.	XX.	XX.	XX.	26	00	00				
	SPOT 34° 12.5 W 1229¹ Lumen				XX.	XX.	XX.	XX.	34	00	00				
															


Quantity Order No. LIGHT HEAD

Quantity Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure


Quantity Order No. Accessories (page 2)

AVVENI
PENDANT 3

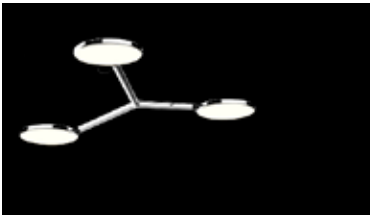

Product-information: Aluminum structure with three light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

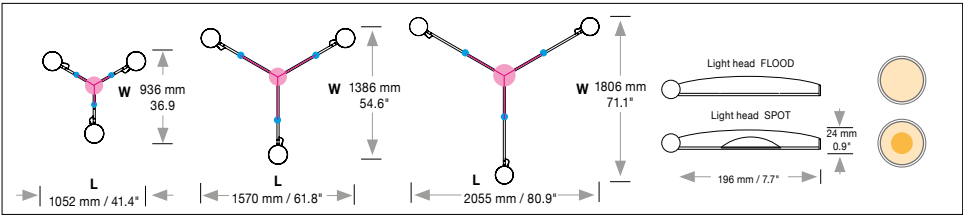

MOUNTING VERSION

Mounting Version B	Mounting Version A/R	Mounting Version F	Mounting Version T
<p>DBS 250 color white</p> <p>H 50 mm / 1.9"</p> <p>Ø body 250 mm / 9.8"</p>	<p>power supply</p> <p>W 143 mm / 5.6"</p> <p>H 56 mm / 2.2"</p> <p>length 363 mm / 14.2"</p>	<p>DB 290</p> <p>Ø body 270 mm / 10.6"</p> <p>H 60 mm / 2.3"</p> <p>Ø Cover plate 290 mm / 11.4"</p>	<p>PB 375 color finish 1</p> <p>H 375 mm / 14.7"</p> <p>Ø body 90 mm / 3.5"</p> <p>Ceiling canopy color white Ø 90 mm / 3.5", H 53 mm / 2.0"</p> <p>Pendant canopy color same as Finish 1 Ø 90 mm / 3.5", H 375 mm / 14.7"</p>

Input voltage for all external power supply units and canopies is 120-277V

ACCESSORIES



Power cable cover plate

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover.
Included with mounting version A/B.

white

200. 00.00.00.12