
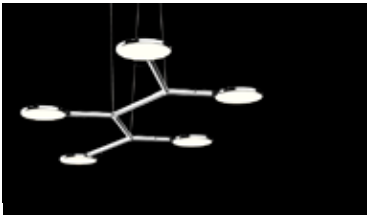


AVVENI  
PENDANT<sup>5</sup>

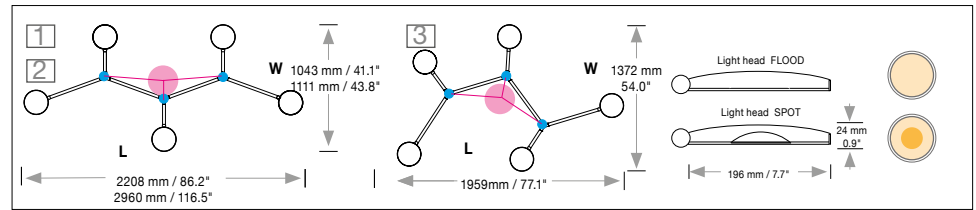










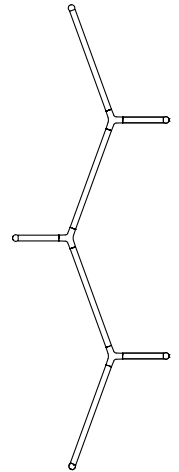
**Product-information:** Aluminum structure with five light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

**Design:** Ulrich Sattler | Michael Schmidt, Code2design














## STRUCTURE

STRUCTURE					STRUCTURE				
Type	L / W mm	L / W inches	LED Watt	weight kg <sup>2</sup> / lbs <sup>2</sup>	Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
<div>1</div> <div>2</div> <div>3</div>	L 2208 / W 1043	L 86.2" / W 41.1	63 W	4.5 / 9.9	<b>1128.</b>	XX.	XX.	XX.	XX.
	L 2960 / W 1111	L 116.5" / W 43.8	63 W	4.7 / 10.4	<b>1129.</b>	XX.	XX.	XX.	XX.
	L 1959 / W 1372	L 77.1" / W 54.0	63W	4.5 / 9.9	<b>1130.</b>	XX.	XX.	XX.	XX.
Finish 1 Structure	<div><b>12</b> white matte RAL 9003</div>	<div><b>14</b> black matte</div>	<div><b>22</b> aluminum polished</div>	<b>Standard</b>	XXXX. XXXX. XXXX.	<b>12</b> <b>14</b> <b>22</b>	XX.	XX.	XX.
Dimmer	<div></div>	<b>0-10 V</b>		<b>Standard</b>	XXXX.	XX.	<b>05</b>	XX.	XX.
Power Supply Cable	power supply cable, silver 196.9" (5000mm), mounting version (A/B) No power supply cable, current-carrying suspension 118.1" (3000mm) (F +R)			<b>Standard</b>	XXXX. XXXX.	XX.	XX.	<b>70</b> <b>00</b>	XX. XX.
Mounting Version	<div><div></div><div></div><div></div><div></div></div>				XXXX.	XX.	XX.	XX.	<b>0x</b>
Standard	<div>Optional</div> <div>Suspension with 3 steel cables 196.9" (5000mm) and external power supply unit in separate canopy or suspended ceiling</div> <div>Suspension with 3 steel cables 196.9" (5000mm) and external power supply unit in suspended ceiling</div> <div>Suspension with canopy and 3 current-carrying steel cables 118.1" (3000mm)</div> <div>Suspension with 3 current-carrying steel cables 118.1" (3000mm) and 3 cavity ceiling boxes, power supply in suspended ceiling</div>				<div></div> <div><div>...</div><div>...</div><div>...</div><div>...</div><div>0.</div></div> <div>Order No. STRUCTURE</div>				



## LIGHT HEAD

LIGHT HEAD								Type No.	Finish 2	Finish 3	LED							
											Kelvin	Beam angle						
Type								01	XX.	XX.	XX	XX.	XX	XX				
Finish 2																		
Light head outside ring		12 white matte RAL 9003		62 (14) black matte		22 aluminum polished		Standard	XX.	12	XX.	XX	XX.	XX	XX			
Finish 2 must be the same as finish 1								XX.	62	XX.	XX	XX.	XX	XX				
								XX.	22	XX.	XX	XX.	XX	XX				
Finish 3																		
Light head top cover		60 silver anodized		61 gold anodized		62 black anodized		Standard	XX.	XX.	60	XX	XX.	XX	XX			
								XX.	XX.	61	XX	XX.	XX	XX				
								XX.	XX.	62	XX	XX.	XX	XX				
LED																		
CRI >95		Extra warm-white		2700 K					XX.	XX	XX.	27	XX.	XX	XX			
SELV	Warm-white		3000 K					XX.	XX	XX.	30	XX.	XX	XX				
	Neutral-white		4000 K					XX.	XX	XX.	40	XX.	XX	XX				
Beam Angle																		
FLOOD 5 x 12.5 W   1282 <sup>1</sup> Lumen									Standard	XX.	XX	XX.	XX	99	00	00		
SPOT 26° 12.5 W   1229 <sup>1</sup> Lumen											XX.	XX	XX.	XX	26	00	00	
SPOT 34° 12.5 W   1229 <sup>1</sup> Lumen												XX.	XX	XX.	XX	34	00	00

Quantity	Order No. LIGHT HEAD
----------	----------------------

Quantity  Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure


Quantity  Order No. Accessories (page 2)

AVVENI  
PENDANT 5



**Product-information:** Aluminum structure with five light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

**Design:** Ulrich Sattler | Michael Schmidt, Code2design

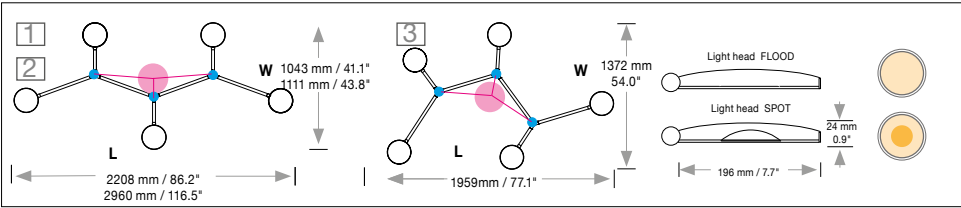

MOUNTING VERSION

Mounting Version B	Mounting Version A/R	Mounting Version F
<b>DBS 300</b> color white  H 53 mm / 2.1" Ø body 297 mm / 11.7"	<b>power supply</b>  W 143 mm / 5.6" H 56 mm / 2.2" length 363 mm / 14.2"	<b>DB 290</b> Ø body 270 mm / 10.6"  H 60 mm / 2.3" Ø Cover plate 290 mm / 11.4"

Input voltage for all external power supply units and canopies is 120-277V

ACCESSORIES



Power cable cover plate

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover.  
**Included with mounting version A/B.**

white

200. 00. 00. 00. 12