



AVVENI PENDANT 6 | 8

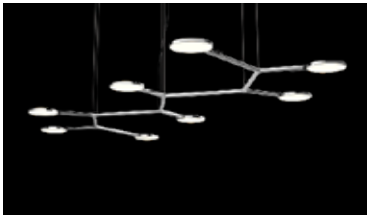


Product- Aluminum structure with six / eight light heads.
Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

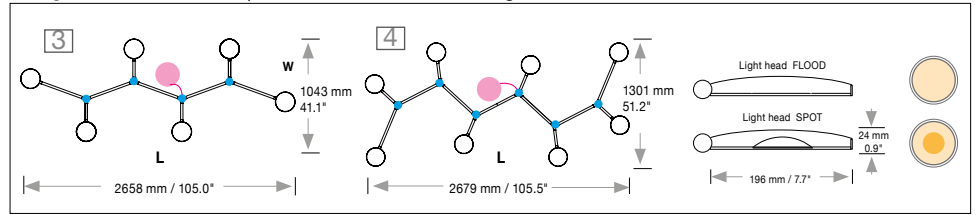

STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ² / lbs ²	STRUCTURE					
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version	
3	L 2658 / W 1043	L 105.0 / W 41.1"	75 W	5.3 / 11.7	1135.	XX.	XX.	XX.	XX.	
4	L 2679 / W 1301	L 105.5 / W 51.2"	100 W	7.1 / 15.7	1140.	XX.	XX.	XX.	XX.	
Finish 1 Structure	12 white matte RAL 9003 14 black matte 22 aluminum polished				Standard	XXXX.	12 14 22	XX.	XX.	XX.
Dimmer	0 -10 V				Standard	XXXX.	XX.	05	XX.	XX.
Cable	power supply cable, silver 196.9" (5000mm) (A/B) No power supply cable, current-carrying suspension (R) 118.1" (3000mm) optional, type 3 only				Standard	XXXX.	XX.	XX.	70 00	XX.
Mounting Version	B Suspension with 3 steel cables 196.9" (5000mm) and external power supply unit in separate canopy or suspended ceiling A Suspension with 3 steel cables 196.9" (5000mm) and external power supply unit in suspended ceiling Optional, type 3 R Suspension with 3 current-carrying steel cables 118.1" (3000mm) and 3 cavity ceiling boxes, power supply in suspended ceiling					XXXX.	XX.	XX.	XX.	0x.
Standard:										0.

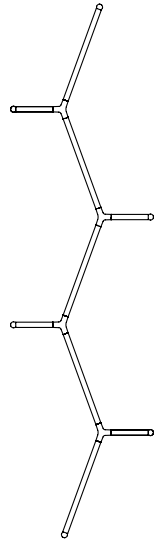

LIGHT HEAD

Type	Finish 2	Finish 3	LED		Kelvin	Beam angle			
			Beam angle						
01	XX.	XX.	XX.	XX.	XX.	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	12 white matte RAL 9003 62 (14) black matte 22 aluminum polished Finish 2 must be the same as finish 1								
Finish 3 Light head top cover	60 silver anodized 61 gold anodized 62 black anodized								
LED		Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K							
Beam Angle	FLOOD 6 / 8 x 12.5 W 1282 ¹ Lumen SPOT 26° 12.5 W 1229 ¹ Lumen SPOT 34° 12.5 W 1229 ¹ Lumen								

Quantity Order No. LIGHT HEAD 00 00

Quantity Order No. LIGHT HEAD 00 00

Flood and spot heads may be mixed within one structure

Quantity Order No. Accessories (page 2) 00 00 00 00


AVVENI

PENDANT 6 | 8



Product- Aluminum structure with six / eight light heads.
Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

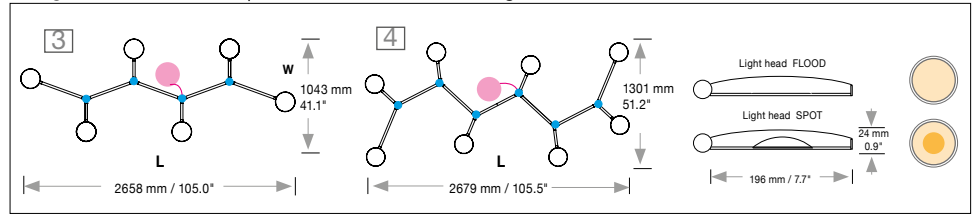


MOUNTING VERSION

Mounting Version B	Mounting Version A/R
<p>DBS 300 color white</p> <p>H 53 mm / 2.1" Ø body 297 mm / 11.7"</p>	<p>power supply</p> <p>W 143 mm / 5.6" H 56 mm / 2.2"</p> <p>Pendant 6 DE 1F 143mm / 5.6" Pendant 8 DE 2F 283mm / 11.1"</p>

Input voltage for all external power supply units and canopies is 120-277V

ACCESSORIES

Power cable cover plate



Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover.
Included with mounting version A/B.

white

200. 00.00.00.12