


AVVENI PENDANT 6



Product-information: Aluminum structure with six light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

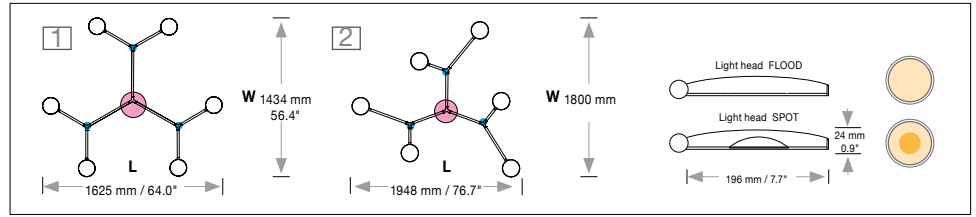


STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ² / lbs ²	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
1	L 1625 / W 1434	L 64.0 / W 56.4"	75 W	5.1 / 11.2	1136.	XX.	XX.	XX.	XX.
2	L 1948 / W 1800	L 76.7 / W 71.0"	75 W	5.4 / 11.9	1137.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matte RAL 9003 14 black matte 22 aluminum polished	Standard	XXXX.	12 14 22	XX.	XX.	XX.	XX.	
Dimmer	0 - 10 V	Standard	XXXX.	XX.	05	XX.	XX.		
Cable	power supply cable, silver, mounting version (A/B) 196.9" (5000mm) No power supply cable, current-carrying suspension (F/R) 118.1" (3000mm) (T) (a) 196.9" (5000mm) + (b) 118.1" (3000mm)	Standard	XXXX.	XX.	XX.	70 00	XX.		
Mounting Version	B A (Optional) F T R		XXXX.	XX.	XX.	XX.	0x.		
Standard	0.								

Suspension with 3 steel cables 196.9" (5000mm) and external power supply unit in separate canopy or suspended ceiling
 Suspension with 3 steel cables 196.9" (5000mm) and external power supply unit in suspended ceiling
 Suspension with canopy and 3 current-carrying steel cables 118.1" (3000mm)
 Canopy suspension with pendant canopy and current-carrying steel cables (a) 196.9" (5000mm) + (b) 118.1" (3000mm)
 Suspension with 3 current-carrying steel cables 118.1" (3000mm) and 3 cavity ceiling boxes, power supply in suspended ceiling

Order No. STRUCTURE



LIGHT HEAD

Type	Finish 2	Finish 3	LED	LIGHT HEAD			
				Kelvin	Beam angle		
Type	01	XX.	XX.	XX.	XX.	XX.	
Finish 2 Light head outside ring	12 white matte RAL 9003 62 (14) black anodized 22 aluminum polished	Standard	XX.	12 62 22	XX.	XX.	XX.
Finish 2 must be the same as finish 1							
Finish 3 Light head top cover	60 silver anodized 61 gold anodized 62 black anodized	Standard	XX.	XX.	60 61 62	XX.	XX.
LED	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K		XX.	XX.	XX.	27 30 40	XX.
Beam Angle	FLOOD 6 x 12.5 W 1282' Lumen SPOT 26° 12.5 W 1229' Lumen SPOT 34° 12.5 W 1229' Lumen	Standard	XX.	XX.	XX.	99 00 00 26 00 00 34 00 00	XX.

Quantity Order No. LIGHT HEAD **00 00**

Quantity Order No. LIGHT HEAD **00 00**

Flood and spot heads may be mixed within one structure


Quantity Order No. Accessories (page 2) **00 00 00 00**

AVVENI PENDANT 6



Product-information: Aluminum structure with six light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

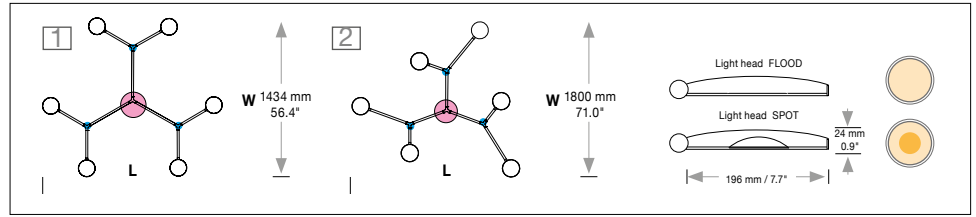

MOUNTING VERSION

Mounting Version B	Mounting Version A/R	Mounting Version F	Mounting Version T
<p>DBS 300 color white</p> <p>H 53 mm / 2.1" Ø body 297 mm / 11.7"</p>	<p>power supply</p> <p>W 143 mm / 5.6" H 56 mm / 2.2" length 363 mm / 14.2"</p>	<p>DB 290</p> <p>Ø body 270 mm / 10.6" H 60 mm / 2.3" Ø Cover plate 290 mm / 11.4"</p>	<p>PB 375 color finish 1</p> <p>H 375 mm / 14.7" Ø body 90 mm / 3.5"</p>
<p>Input voltage for all external power supply units and canopies is 120-277V</p>			
<p>Ceiling canopy color white Ø 90 mm / 3.5", H 53 mm / 2.0"</p> <p>Pendant canopy color same as Finish 1 Ø 90 mm / 3.5", H 375 mm / 14.7"</p>			

ACCESSORIES



Power cable cover plate

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover.
Included with mounting version A/B.

white

200. 00. 00. 00. 12