



AVVENI SINGLE





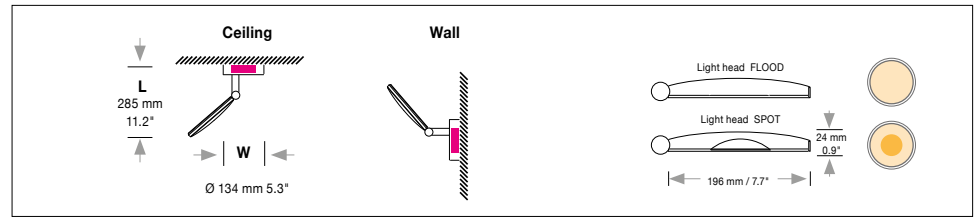


Product-information: Aluminum structure with 1 light head. Light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design




STRUCTURE







Type	W Ø / L mm	W Ø / L inches	LED Watt	weight kg ² / lbs ²	Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
	Ø 134 / 285	Ø 5.3 / 11.2"	12.5 W	1.6 / 3.5	1112.	XX.	XX.	XX.	XX.
Finish 1 Structure	 12 white matte RAL 9003	 14 black matte	 22 aluminum polished		XXXX.	12 14 22	XX.	XX.	XX.
Dimmer	 0-10 V		Standard		XXXX.	XX.	05	XX.	XX.
Power Supply Cable	No power supply cable				XXXX.	XX.	XX.	00	XX.
Mounting Version	 P		Standard		XXXX.	XX.	XX.	00	0P


Direct ceiling mounting with power supply unit in canopy

Order No. STRUCTURE



LIGHT HEAD

Type	Finish 2	Finish 3	LED	Beam angle	Order No.
Finish 2 Light head outside ring	 12 white matte RAL 9003	 62 (14) black matte	 22 aluminum polished		Standard
Finish 2 must be the same as finish 1					
Finish 3 Light head top cover	 60 silver anodized	 61 gold anodized	 62 black anodized		Standard
LED CRI >95 SELV	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K				
Beam Angle	FLOOD	12.5 W 1282' Lumen			Standard
	SPOT 26°	12.5 W 1229' Lumen			
	SPOT 34°	12.5 W 1229' Lumen			

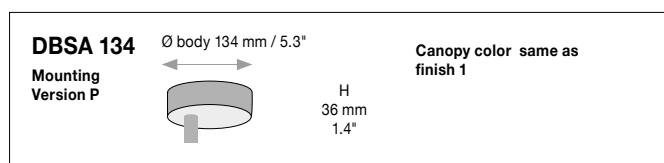

Order No. LIGHT HEAD FLOOD

Order No. LIGHT HEAD SPOT

Input voltage for power supply units is 120-277 VAC 50/60 Hz
Remote OT96-D010 driver ordered separately (13.25" (L) x 5" (W) x 2.25" (H))

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution direct



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

Technical data is subject to change. Errors and omissions excepted 1. Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2. Weight of lights without remote technical unit or canopy.