
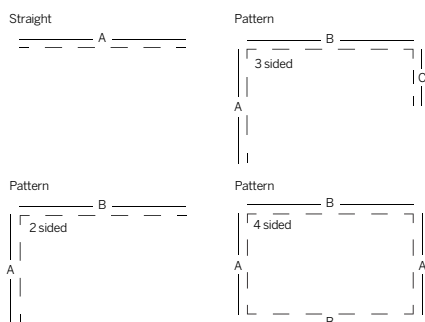


# 150 Linear Bezel LED

## Specifications

inter•lux

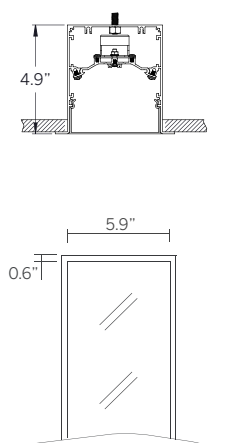

### Ordering Information

| WG-B150LDL |                                        |                                          |                   |                                                      |                                    |                                         | OD       |                       |         |
|------------|----------------------------------------|------------------------------------------|-------------------|------------------------------------------------------|------------------------------------|-----------------------------------------|----------|-----------------------|---------|
| Model      | Type                                   | Length                                   | LED <sup>2</sup>  | Color <sup>3</sup>                                   | Voltage                            | Power <sup>4</sup>                      | Diffuser | Mount                 | Options |
| WG-B150LDL | S<br>P <sup>1</sup><br>PZ <sup>1</sup> | A<br>A x B<br>A x B x C<br>A x B x A x B | L<br>M<br>H<br>M2 | 827<br>830<br>835<br>840<br>927<br>930<br>935<br>940 | UNV<br><br><br><br><br><br><br>120 | S<br>D010<br>D3W<br>DES<br><br><br>DFPN | OD       | HC<br>G9<br>G15<br>GS | DL      |

### Luminaire

- Bezel trim for drywall ceilings and walls.
- Installation from below for remodel or new construction.
- Easily installed internal LED tray assembly with integral driver.
- High reflectance white reflector.
- Flush snap-in opal diffuser (standard).
- Powdercoat painted white - RAL 9010.
- Proper installation requires ceiling tiles to be trimmed to fit.

### Type

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane<sup>1</sup>
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory<sup>1</sup>

### Length

- A, B, C = specify feet & inches to the nearest 0.25" (i.e. 6' 5.5") For patterns specify each length (i.e. 2 sided: A x B = 6' 5" x 6'; 3 sided: A x B x C; 4 sided: A x B x A x B)

### LED<sup>2</sup>

- L = Low Power (3W/ft)
- M = Mid Power (6W/ft)
- H = High Power (10W/ft)
- M2 = 2 Rows of Mid Power (12W/ft)

### Color / Lumens<sup>3</sup>

80+ CRI minimum (Low/Mid/High/2xMid)

- 827 = 2700K, 400/743/1174/1486 lm/ft
- 830 = 3000K, 400/743/1174/1486 lm/ft
- 835 = 3500K, 416/774/1222/1548 lm/ft
- 840 = 4000K, 424/789/1246/1578 lm/ft
- For 90+ CRI specify 927, 930, etc.

### Voltage

- UNV = 120-277V
- 120 = 120V (DFPN Only)

### Power Supply (integral)<sup>4</sup>

- S = Standard driver, 120-277V
- D010 = 10%, 0-10V dimming, 120-277V
- D3W = Lutron, 1%, 3-wire dimming, 120-277V
- DES = Lutron, 1%, EcoSystem E1/E2 digital dimming, 120-277V
- DFPN = Lutron 1% forward phase with neutral, 120V only

### Diffuser

- OD = Flush opal diffuser (standard)

### Mounting

- HC = hard ceiling
- G9 = 9/16 grid
- G5 = 15/16 grid
- GS = slot grid

### Options

- DL = Damp location
- Contact factory for emergency lighting options

- 1 See pattern specs sheet.
- 2 Wattage shown does not include power supplies/drivers.
- 3 Source lumens shown. Lumens for CRI 90(+), are about 16% lower compared to standard CRI 80(+).
- 4 See power supply specs sheet.

# 150 Linear Bezel LED

## Dimensions

