

baton lighting concept




	2 W	3 W	7.3 W
_P 	-	1.3 x 13.8 in 1.3 x 19.7 in	2.4 x 9.8 in 2.4 x 15.8 in
_R 	1.2 x 1.2 in	-	3.2 x 4.7 in
_Q 	1.2 x 1.2 in	-	3.2 x 4.7 in 3.2 x 7.9 in
Finish			
CRI 92	3000K 3500K 4000K 5000K	3000K 3500K 4000K	3000K 3500K 4000K
Optics	Spot Medium Flood Flood Wide Flood	Flood	Flood
Driver	0-10V	0-10V	0-10V

Controlled emission


Baton creates high contrast light effects. The lens integrated in the body creates a light beam characterised by clear-cut edges capable of casting any lit subject.

The receded position of the LED makes this suspension extremely comfortable to view, perfect, for example, lighting cafeteria tables and counters.

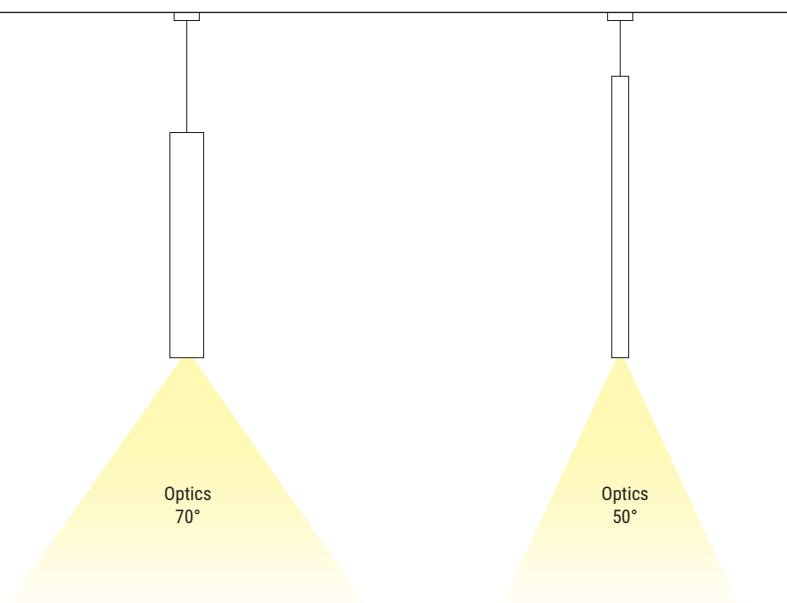


Range

Two sections in four different lengths characterise the versions available in this range. Though extremely minimal is used alone, Baton can become incredibly scenographic if combined in multiple composition playing with the various available shapes.

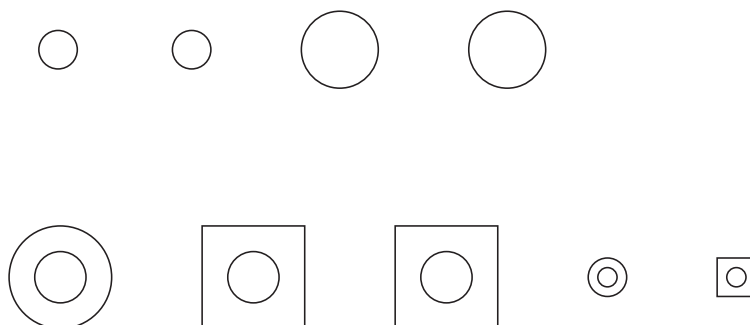


Finishes

The lighting bodies, painted with white matt or black matt finish powders, perfectly merge with the architectural space. The internal of the optical unit characterises the product with a slight color accent, in matt black and gold black.

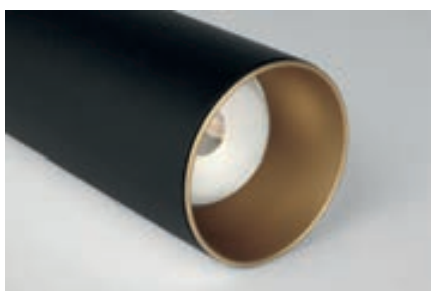

Baton_P | Pendant Luminaires | arrayLED | Driver remote | 7.3W 200mA



Ø 2.4 |




CRI 80

White Bk E64742	3000 K	988 lm	W	Flood	70
White Au E64741	3500 K	988 lm	T		
Black Au E64754	4000 K	1058 lm	N		

Power supply options (remote only)

ECO30W-200	SOLO50W-200	SOLO100W-200
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-4 fixtu es

Baton_P | Pendant Luminaires | arrayLED | Driver remote | 7.3W 200mA



Ø 2.4 |




CRI 80

White Bk E64744	3000 K	988 lm	W	Flood	70
White Au E64743	3500 K	988 lm	T		
Black Au E64755	4000 K	1058 lm	N		

Power supply options (remote only)

ECO30W-200	SOLO50W-200	SOLO100W-200
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-4 fixtu es

Baton_P | Pendant Luminaires | arrayLED | Driver remote | 3W 250mA



Ø 1.3 |




CRI 80

White Bk E64785	3000 K	325 lm	W	Flood	50
White Au E64786	3500 K	325 lm	T		
Black Au E64787	4000 K	351 lm	N		

Power supply options (remote only)

ECO30W-250	SOLO50W-250	SOLO100W-250
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-12 fixtu es

Baton_P | Pendant Luminaires | arrayLED | Driver remote | 3W 250mA

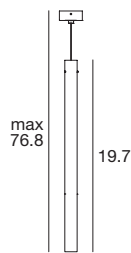

Ø 1.31 |



CRI 80

White Bk E64782	3000 K	325 lm	W	Flood	50
White Au E64783	3500 K	325 lm	T		
Black Au E64784	4000 K	351 lm	N		

Power supply options (remote only)

ECO30W-250	SOLO50W-250	SOLO100W-250
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-12 fixtu es