



General: Gude is part of our Crystals collection. A series of small spot lights with crystal diffusers made in different shapes, some clear and some diffused but all of them with the goal to create a unique effect in the space.

Fixture Body: Brass (Chromium Plated).

Diffuser: Clear Glass.

Trim: Trimless.

Mounting: Semi-Recessed ceiling.

Dimensions/Weight: 0.8" (0.13 lbs) – 1.2" (0.27 lbs) – 1.6" (0.5 lbs)

Driver: Remote. Constant Current 120-277V, Dimmable 0-10V.

Operation: Constant Current (CC).

CC features: Less susceptible to voltage drop (exceeding 32' distance); Allows for dimming down to 0.1%; Fixtures need to be wired in series.

Wattages: 1.5W (applicable to all sizes).

Cable: Fixture comes with 0.39' of power cable.

IP rating: IP54. Fixture is dust protected and protected against water splashed from all directions.

ETL Certification: ETL, damp location


Optics: Fixed, General distribution.

Color temperatures: 2700K – 3000K – 4000K – 5000K.

CRI: 80+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

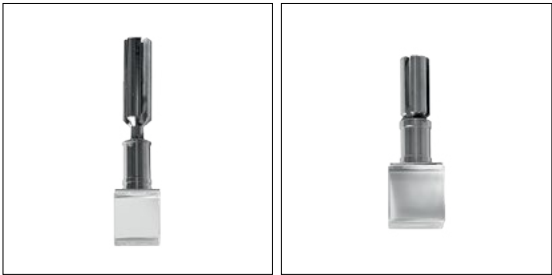

0.8" (1W)

1.2" (1W)



1.6" (1W)


Delivered Lumens*	0.8"	12"	16"
GE	143	199	199

*Values shown for 3000K

Ordering Information								(Required)	
GUD	TL	CU		1.5 - CC		GE			
Product	Trim/Film	Type	Diameter	Wattage/Operation	Color Temp	Optic	+	Housing ¹	Drive ¹
GUD = Gude	TL = Trimless	CU = Cube Shaped Crystal	08 = 0.8" 12 = 1.2" 16 = 1.6"	1.5 CC = 1.5W / Constant Current (500mA)	27 = 2700K 30 = 3000K 40 = 4000K 50 = 5000K	GE = General distribution		E84917 (08) E84954 (12) E84901 (16)	ECO30W-500 SOLO50W-500 SOLO100W-500

¹ See page 2

0.8" 1W CC

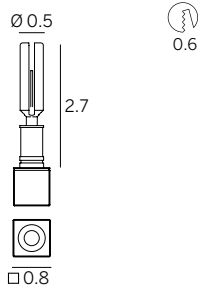

Housing

E84917
Recessed Housing



DRIVER OPTIONS (pick one)


C.C. Power supply options (remote only)

ECO30W-500
0-10V EldoLED
ECOdrive 30W
for 1-10 fixtures

SOLO50W-500
0-10V EldoLED
SOLOdrive 50W
for 1-20 fixtures

SOLO100W-500
0-10V EldoLED
SOLOdrive 100W
for 1-40 fixtures

1.2" 1W CC

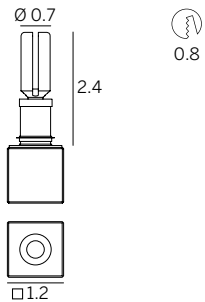

Housing

E84954
Recessed Housing



DRIVER OPTIONS (pick one)


C.C. Power supply options (remote only)

ECO30W-500
0-10V EldoLED
ECOdrive 30W
for 1-10 fixtures

SOLO50W-500
0-10V EldoLED
SOLOdrive 50W
for 1-20 fixtures

SOLO100W-500
0-10V EldoLED
SOLOdrive 100W
for 1-40 fixtures

1.6" 1W CC



Housing

E84901
Recessed Housing



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-500
0-10V EldoLED
ECOdrive 30W
for 1-10 fixtures

SOLO50W-500
0-10V EldoLED
SOLOdrive 50W
for 1-20 fixtures

SOLO100W-500
0-10V EldoLED
SOLOdrive 100W
for 1-40 fixtures