

iris67



Iris67's adjustable ring nut lets you set the beam width anywhere between 8 and 50 degrees, and it also swivels horizontally by 220 degrees. It is perfect for garden plants, since the light can be adjusted as they grow, and the variable focus illuminates only the required area.

Materials

Aluminum body

IP67 versatile spotlight

Aesthetically pleasing with minimal forms, Iris67 introduces the possibility of professionally managing the light beam in an outdoor environment, allowing a broad spectrum of lighting situations applicable to decorative elements (statues, installations) and high plants. A device for advanced lighting, IP67 and entirely in aluminum: the concrete and reliable design of Iris67 guarantees maximum protection against atmospheric agents, water (with the exception of immersion) and microscopic particles.




Adjustable optics

Iris_67 allows the light beam to be adapted to the directing needs in outdoor settings in order to adapt to the growth of high trees and/or the enhancement of urban décor elements with different heights and dimensions. Thanks to the graduated focus-on-board ring nut, the beam aperture can be calibrated, variable depending on the selected model, making the directing operation simple and precise. The blocking system of the facilitated focus allows obtaining an opening precisely corresponding to the gradient indicated along the ring nut.




Dynamic optical range

The Elliptic version is the feather in the cap of the Iris67 family, a new product for 2019 that expands the potential of a highly professional outdoor spotlight. In addition to allowing adjustment of the beam aperture, Iris67 Elliptic lets you act on a second ring nut to control the movement of a specific filter placed at the end of the device. Increasing or decreasing the distance of the filter from the main lens, we can change the shape of the light beam, thereby obtaining a perfect elliptical lighting for very high plants or vertical urban elements (for example, signs).

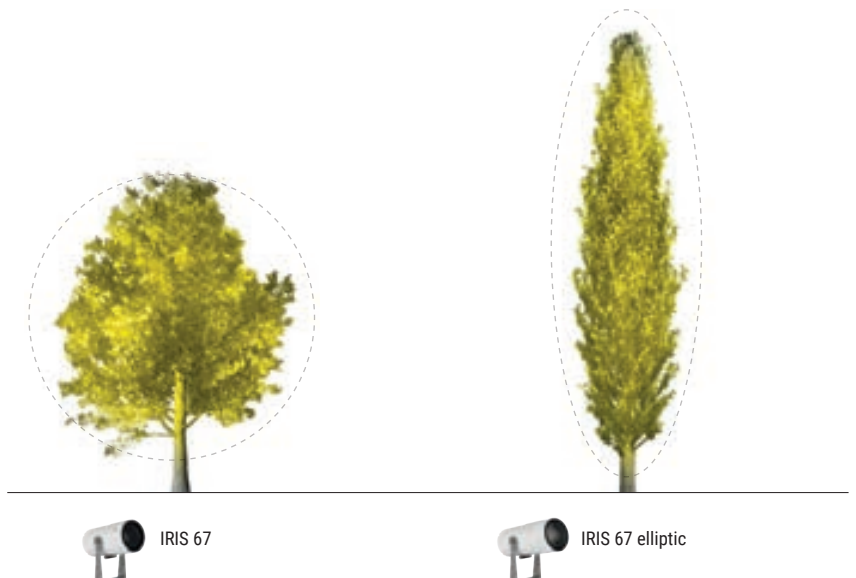



Iris67 | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 6W 630mA



CRI 80


White	E92230	2700K	685 lm	M	15°-45°	85
Black	E92231	3000K	685 lm	W		
Grey	E92232	4000K	739 lm	N		

Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures	 E84890 9.84 in Steel Pegs	 E98112 27.56 in Steel Pegs
--	--	---	---	--





Iris67 | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 13W 350mA



CRI 80


White	E97318	2700K	1724 lm	M	15°-62°	85
Black	E97319	3000K	1724 lm	W		
Grey	E97320	4000K	1854 lm	N		

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures	 E84890 9.84 in Steel Pegs	 E98112 27.56 in Steel Pegs
---	--	--	---	--





Iris67 | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 20W 580mA




CRI 80


White	E97321	2700K	2714 lm	M	16°-52°	85
Black	E97322	3000K	2900 lm	W		
Grey	E97323	4000K	2900 lm	N		

Power supply options (remote only)

ECO30W-580 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-580 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-580 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures	 E84890 9.84 in Steel Pegs	 E98112 27.56 in Steel Pegs
---	--	--	---	--





Iris67 | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 30W 840mA



CRI 80


White	E97324	2700K	4220 lm	M	15°-56°	85
Black	E97325	3000K	4535 lm	W		
Grey	E97326	4000K	4535 lm	N		

Power supply options (remote only)

SOLO50W-840 0-10V EldoLED SOLOdrive 50W for 1 fixture	SOLO100W-840 0-10V EldoLED SOLOdrive 100W for 1-2 fixtures	 E84890 9.84 in Steel Pegs	 E98112 27.56 in Steel Pegs
---	--	---	--





Iris67 Elliptic | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 6W 630mA



CRI 80


White	E81720	2700K	685 lm	M	15°-45°	88
Black	E81721	3000K	685 lm	W		
Grey	E81722	4000K	739 lm	N		

Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures	 E84890 9.84 in Steel Pegs	 E98112 27.56 in Steel Pegs
--	--	---	---	--





Iris67 Elliptic | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 13W 350mA



CRI 80


White	E81723	2700K	1636 lm	M	15°-62°	88
Black	E81724	3000K	1520 lm	W		
Grey	E81725	4000K	1520 lm	N		

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures	 E84890 9.84 in Steel Pegs	 E98112 27.56 in Steel Pegs
---	--	--	---	--





Iris67 Elliptic | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 20W 580mA



CRI 80


White	E81726	2700K	2572 lm	M	16°-52°	88
Black	E81727	3000K	2572 lm	W		
Grey	E81728	4000K	2396 lm	N		

Power supply options (remote only)

ECO30W-580 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-580 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-580 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures	 E84890 9.84 in Steel Pegs	 E98112 27.56 in Steel Pegs
---	--	--	---	--



Iris67 Elliptic | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 30W 840mA

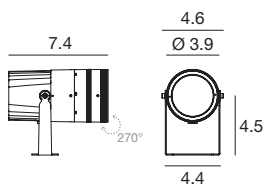

CRI 80

White	E81729	2700K	4220 lm	M	15°-56°	88
Black	E81730	3000K	3945 lm	W		
Grey	E81731	4000K	3945 lm	N		

Power supply options (remote only)

SOLO50W-840 0-10V EldoLED SOLOdrive 50W for 1 fixture	SOLO100W-840 0-10V EldoLED SOLOdrive 100W for 1-2 fixtures	 E84890 9.84 in Steel Pegs	 E98112 27.56 in Steel Pegs
---	--	---	--

