

# iris67



Iris67's adjustable ring nut lets you set the beam width anywhere between 8 and 50 degrees, and it also swivels horizontally by 220 degrees. It is perfect for garden plants, since the light can be adjusted as they grow, and the variable focus illuminates only the required area.

## **Materials**

Aluminum body

---

### IP67 versatile spotlight

Aesthetically pleasing with minimal forms, Iris67 introduces the possibility of professionally managing the light beam in an outdoor environment, allowing a broad spectrum of lighting situations applicable to decorative elements (statues, installations) and high plants. A device for advanced lighting, IP67 and entirely in aluminum: the concrete and reliable design of Iris67 guarantees maximum protection against atmospheric agents, water (with the exception of immersion) and microscopic particles.



---

### Adjustable optics


Iris\_67 allows the light beam to be adapted to the directing needs in outdoor settings in order to adapt to the growth of high trees and/or the enhancement of urban décor elements with different heights and dimensions. Thanks to the graduated focus-on-board ring nut, the beam aperture can be calibrated, variable depending on the selected model, making the directing operation simple and precise. The blocking system of the facilitated focus allows obtaining an opening precisely corresponding to the gradient indicated along the ring nut.




---

### Dynamic optical range

The Elliptic version is the feather in the cap of the Iris67 family, a new product for 2019 that expands the potential of a highly professional outdoor spotlight. In addition to allowing adjustment of the beam aperture, Iris67 Elliptic lets you act on a second ring nut to control the movement of a specific filter placed at the end of the device. Increasing or decreasing the distance of the filter from the main lens, we can change the shape of the light beam, thereby obtaining a perfect elliptical lighting for very high plants or vertical urban elements (for example, signs).

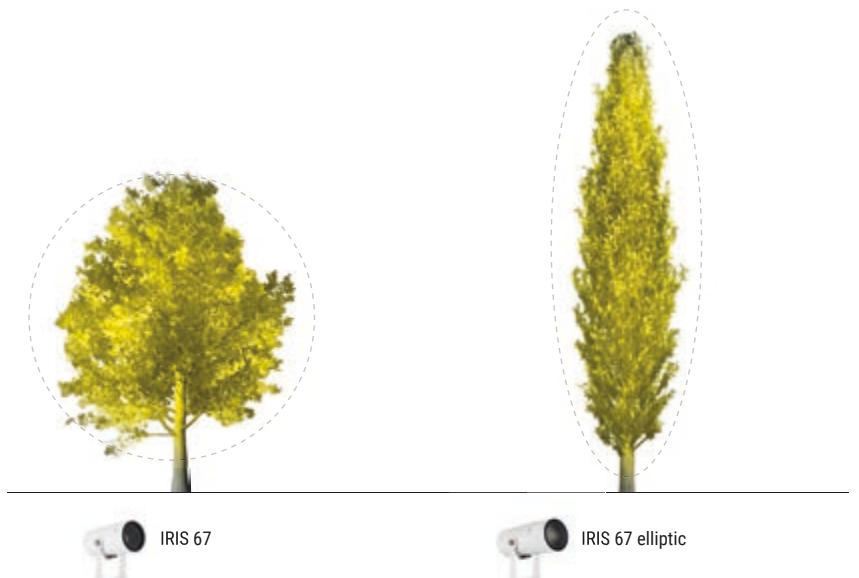

## Iris67 | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 6W 630mA



CRI 80

White	<b>E92230</b>	2700K	685 lm	<b>M</b>	15°-45°	<b>85</b>
Black	<b>E92231</b>	3000K	685 lm	<b>W</b>		
Grey	<b>E92232</b>	4000K	739 lm	<b>N</b>		

## Power supply options (remote only)

## ECO30W-630

0-10V EldoLED  
ECODrive 30W  
for 1-3 fixtures



## SOLO50W-630

0-10V EldoLED  
SOLOdrive 50W  
for 1-6 fixtures

## SOLO100W-630

0-10V EldoLED  
SOLOdrive  
100W for 1-12  
fixtures**E84890**  
9.84 in  
Steel Pegs**E98112**  
27.56 in  
Steel Pegs

## Iris67 | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 13W 350mA



CRI 80

White	<b>E97318</b>	2700K	1724 lm	<b>M</b>	15°-62°	<b>85</b>
Black	<b>E97319</b>	3000K	1724 lm	<b>W</b>		
Grey	<b>E97320</b>	4000K	1854 lm	<b>N</b>		

## Power supply options (remote only)

## ECO30W-350

0-10V EldoLED  
ECODrive 30W  
for 1 fixture


## SOLO50W-350

0-10V EldoLED  
SOLOdrive 50W  
for 1-2 fixtures

## SOLO100W-350

0-10V EldoLED  
SOLOdrive  
100W for 1-4  
fixtures**E84890**  
9.84 in  
Steel Pegs**E98112**  
27.56 in  
Steel Pegs

## Iris67 | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 20W 580mA



CRI 80

White	<b>E97321</b>	2700K	2714 lm	<b>M</b>	16°-52°	<b>85</b>
Black	<b>E97322</b>	3000K	2900 lm	<b>W</b>		
Grey	<b>E97323</b>	4000K	2900 lm	<b>N</b>		

## Power supply options (remote only)

## ECO30W-580

0-10V EldoLED  
ECODrive 30W  
for 1 fixture



## SOLO50W-580

0-10V EldoLED  
SOLOdrive 50W  
for 1-2 fixtures

## SOLO100W-580

0-10V EldoLED  
SOLOdrive  
100W for 1-4  
fixtures**E84890**  
9.84 in  
Steel Pegs**E98112**  
27.56 in  
Steel Pegs

## Iris67 | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 30W 840mA



CRI 80

White	<b>E97324</b>	2700K	4220 lm	<b>M</b>	15°-56°	<b>85</b>
Black	<b>E97325</b>	3000K	4535 lm	<b>W</b>		
Grey	<b>E97326</b>	4000K	4535 lm	<b>N</b>		

## Power supply options (remote only)


## SOLO50W-840

0-10V EldoLED  
SOLOdrive 50W  
for 1 fixture

## SOLO100W-840

0-10V EldoLED  
SOLOdrive 100W  
for 1-2 fixtures**E84890**  
9.84 in  
Steel Pegs**E98112**  
27.56 in  
Steel Pegstechnical  
information

## Iris67 Elliptic | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 6W 630mA



CRI 80

White	<b>E81720</b>	2700K	685 lm	<b>M</b>	15°-45°	<b>88</b>
Black	<b>E81721</b>	3000K	685 lm	<b>W</b>		
Grey	<b>E81722</b>	4000K	739 lm	<b>N</b>		

## Power supply options (remote only)

## ECO30W-630

0-10V EldoLED  
ECODrive 30W  
for 1-3 fixtures


## SOLO50W-630

0-10V EldoLED  
SOLOdrive 50W  
for 1-6 fixtures

## SOLO100W-630

0-10V EldoLED  
SOLOdrive  
100W for 1-12  
fixtures**E84890**  
9.84 in  
Steel Pegs**E98112**  
27.56 in  
Steel Pegs

## Iris67 Elliptic | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 13W 350mA



CRI 80

White	<b>E81723</b>	2700K	1636 lm	<b>M</b>	15°-62°	<b>88</b>
Black	<b>E81724</b>	3000K	1520 lm	<b>W</b>		
Grey	<b>E81725</b>	4000K	1520 lm	<b>N</b>		

## Power supply options (remote only)

## ECO30W-350

0-10V EldoLED  
ECODrive 30W  
for 1 fixture


## SOLO50W-350

0-10V EldoLED  
SOLOdrive 50W  
for 1-2 fixtures

## SOLO100W-350

0-10V EldoLED  
SOLOdrive  
100W for 1-4  
fixtures**E84890**  
9.84 in  
Steel Pegs**E98112**  
27.56 in  
Steel Pegs

## Iris67 Elliptic | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 20W 580mA



CRI 80

White	<b>E81726</b>	2700K	2572 lm	<b>M</b>	16°-52°	<b>88</b>
Black	<b>E81727</b>	3000K	2572 lm	<b>W</b>		
Grey	<b>E81728</b>	4000K	2396 lm	<b>N</b>		

## Power supply options (remote only)

## ECO30W-580

0-10V EldoLED  
ECODrive 30W  
for 1 fixture


## SOLO50W-580

0-10V EldoLED  
SOLOdrive 50W  
for 1-2 fixtures

## SOLO100W-580

0-10V EldoLED  
SOLOdrive  
100W for 1-4  
fixtures**E84890**  
9.84 in  
Steel Pegs**E98112**  
27.56 in  
Steel Pegs

## Iris67 Elliptic | Accent lighting | arrayLED | Wet location | Driver remote | Tilttable | 30W 840mA



CRI 80

White	<b>E81729</b>	2700K	4220 lm	<b>M</b>	15°-56°	<b>88</b>
Black	<b>E81730</b>	3000K	3945 lm	<b>W</b>		
Grey	<b>E81731</b>	4000K	3945 lm	<b>N</b>		

## Power supply options (remote only)

## SOLO50W-840

0-10V EldoLED  
SOLOdrive 50W  
for 1 fixture

## SOLO100W-840

0-10V EldoLED  
SOLOdrive  
100W for 1-2  
fixtures**E84890**  
9.84 in  
Steel Pegs**E98112**  
27.56 in  
Steel Pegstechnical  
information