


Micro LED strip fitted into 0.65" x 0.65" channel. IP66 rated for exterior use. Channel length up to 6.5ft (2m); strip comes in 1 inch (25mm) increments.

- Materials: Aluminum, acrylic
- Color Temp: 2700K, 3000K, 4000K
- Lamp: MSL G3.2 Standard Output or MSL G3.2 High Output
- CRI: ≥90
- Finish: Anodized aluminum
- Dimming: EldoLED 0-10V or DMX
- Supply: 24V DC from a dedicated driver (12V for red, yellow, green and amber)
- Fixing: Via fixing tabs at either end or anywhere along the length (1 supplied every 20" (500mm) as standard) or via M3 linear thread anywhere along the back of the extrusion.
- Deviations: Mounting options. Clear cover available as diffuser. Anything over 6.5ft (2m) will be supplied in more than 1 section.

- G3.2 Standard Output
  - LEDs at 1.79mm centers / 280 LEDs per 20" (500mm) strip
  - Consumption: 5 W/ft (16.8 W/m)
  - Output: 456 lm/ft (1496 lm/m)
- G3.2 High Output
  - LEDs at 1.79mm centers / 280 LEDs per 20" (500mm) strip
  - Consumption: 9.5 W/ft (31.2 W/m)
  - Output: 824lm/ft (2702 lm/m)

Alternative adjustable hinge mounts;

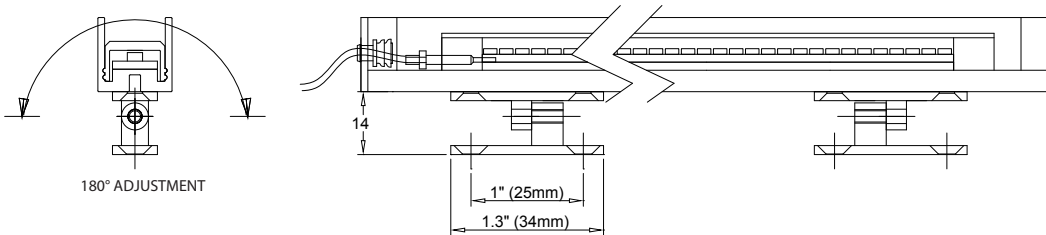

Order Code	series.col temp.output.length.dimming
Example	Ext channel.3000K.Standard.20".D010

Series	Color	Output	Length	Dimming and control	Mounting Options	Accessory Options
Exterior LED Channel	2700K	Standard G3.2 5W/ft, 456lm/ft	Specify length in 1 inch increments	D010 0-10V DMX DMX	Fixing tabs (standard) M3 linear thread Adjustable hinge 180°	FD Frosted diffuser CD Clear diffuser
	3000K	High G3.2 9.5W/ft, 824lm/ft				
	4000K					

