


# petit




Square or round-shaped, Petit has two small slots with extremely small emission angle. A step light conceived for prompt lighting of significant architectural elements along corridors, staircases and transit areas.

## **Materials**

Brass or aluminum body

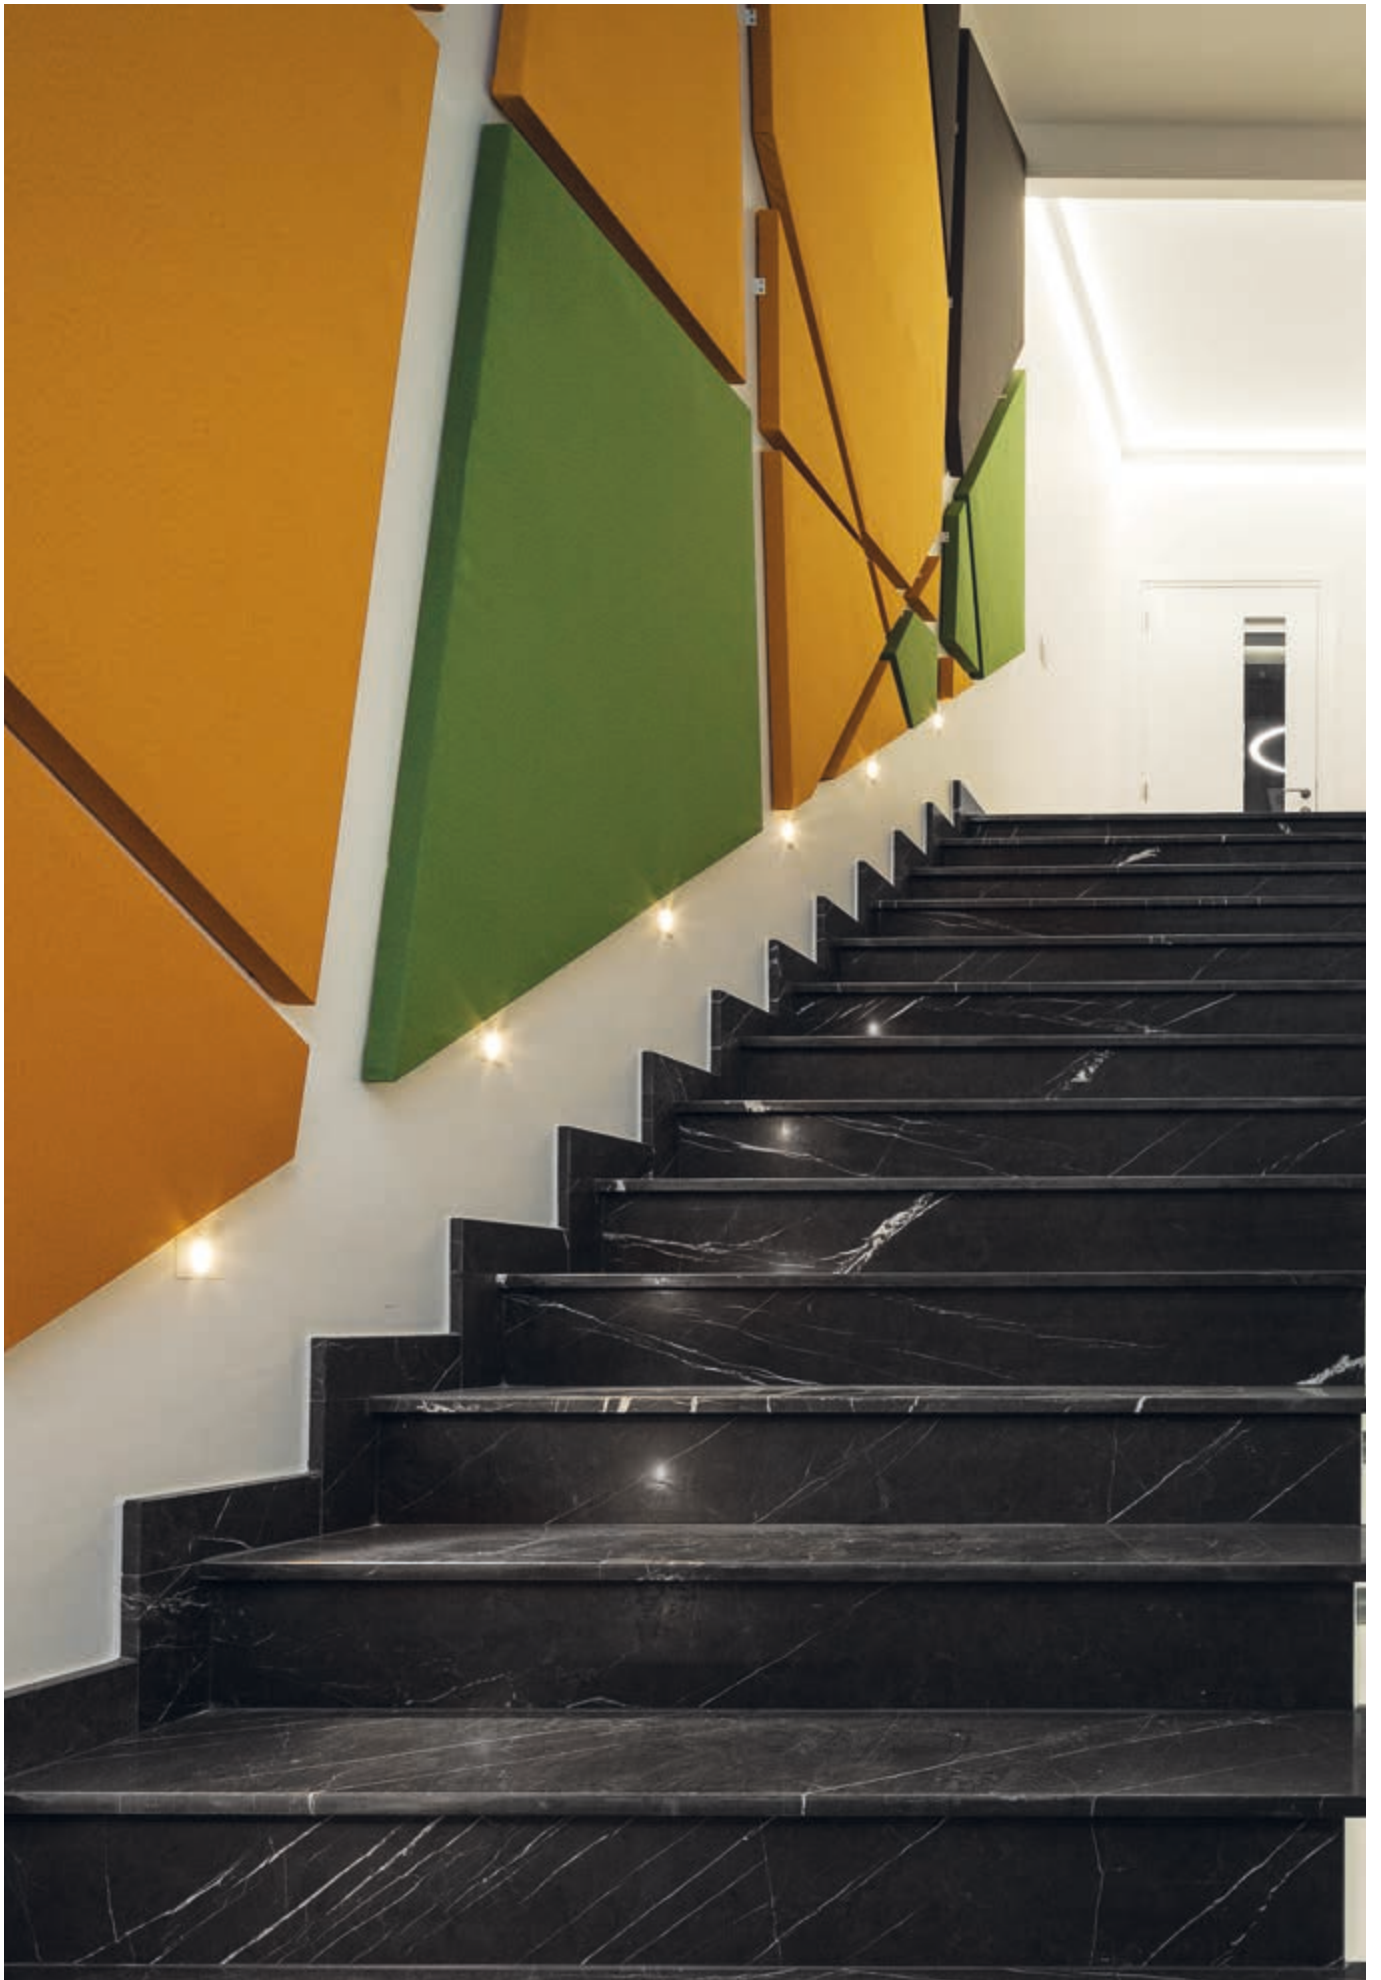

**Petit\_R | Path-marker | powerLED | Driver remote | 1W 350mA**



 0.6

Efficiency - CRI 80


White	<b>E92316</b>	2700 K	98 lm	<b>M</b>	Narrow Spot	<b>05</b>
Nickel	<b>E92318</b>	3000 K	107 lm	<b>W</b>		
		3500 K	107 lm	<b>T</b>		
		4000 K	114 lm	<b>N</b>		

Power supply options (remote only)

<b>ECO30W-350</b>	<b>SOLO50W-350</b>	<b>SOLO100W-350</b>
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

 659 Recessed casing **E84335**

**Petit\_R | Path-marker | powerLED | Driver remote | 1.5W 500mA**



 0.6

Efficiency - CRI 80


White	<b>E92320</b>	2700 K	130 lm	<b>M</b>	Narrow Spot	<b>05</b>
Nickel	<b>E92322</b>	3000 K	143 lm	<b>W</b>		
		3500 K	143 lm	<b>T</b>		
		4000 K	152 lm	<b>N</b>		

Power supply options (remote only)

<b>ECO30W-500</b>	<b>SOLO50W-500</b>	<b>SOLO100W-500</b>
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

 659 Recessed casing **E84917**

**Petit\_Q | Path-marker | powerLED | Driver remote | 1W 350mA**



 0.6

Efficiency - CRI 80


White	<b>E92324</b>	2700 K	98 lm	<b>M</b>	Narrow Spot	<b>05</b>
Nickel	<b>E92326</b>	3000 K	107 lm	<b>W</b>		
		3500 K	107 lm	<b>T</b>		
		4000 K	114 lm	<b>N</b>		

Power supply options (remote only)

<b>ECO30W-350</b>	<b>SOLO50W-350</b>	<b>SOLO100W-350</b>
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

 659 Recessed casing **E84335**

**Petit\_Q | Path-marker | powerLED | Driver remote | 1.5W 500mA**



 0.6

Efficiency - CRI 80

White	<b>E92328</b>	2700 K	130 lm	<b>M</b>	Narrow Spot	<b>05</b>
Nickel	<b>E92330</b>	3000 K	143 lm	<b>W</b>		
		3500 K	143 lm	<b>T</b>		
		4000 K	152 lm	<b>N</b>		

Power supply options (remote only)


<b>ECO30W-500</b>	<b>SOLO50W-500</b>	<b>SOLO100W-500</b>
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

 659 Recessed casing **E84917**

**Petit\_2R | Path-marker | powerLED | Damp location | Driver remote | 1W 350mA**



▶ 659 Recessed casing  
**E84915/E84336**



Efficiency - CRI 80

White	<b>E92405</b>	2700 K	136 lm	<b>M</b>	Narrow Spot	<b>05</b>
Nickel	<b>E92407</b>	3000 K	145 lm	<b>W</b>		
		3500 K	145 lm	<b>T</b>		
		4000 K	155 lm	<b>N</b>		


**Power supply options (remote only)**

<b>ECO30W-350</b>	<b>SOLO50W-350</b>	<b>SOLO100W-350</b>
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

**Petit\_2R | Path-marker | powerLED | Damp location | Driver remote | 2W 630mA**



▶ 659 Recessed casing  
**E84901**



Efficiency - CRI 80

White	<b>E92409</b>	2700 K	219 lm	<b>M</b>	Narrow Spot	<b>05</b>
Nickel	<b>E92411</b>	3000 K	233 lm	<b>W</b>		
		3500 K	233 lm	<b>T</b>		
		4000 K	249 lm	<b>N</b>		


**Power supply options (remote only)**

<b>ECO30W-630</b>	<b>SOLO50W-630</b>	<b>SOLO100W-630</b>
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

**Petit\_2Q | Path-marker | powerLED | Damp location | Driver remote | 1W 350mA**



▶ 659 Recessed casing  
**E84915/E84336**



Efficiency - CRI 80

White	<b>E92413</b>	2700 K	136 lm	<b>M</b>	Narrow Spot	<b>05</b>
Nickel	<b>E92415</b>	3000 K	145 lm	<b>W</b>		
		3500 K	145 lm	<b>T</b>		
		4000 K	155 lm	<b>N</b>		


**Power supply options (remote only)**

<b>ECO30W-350</b>	<b>SOLO50W-350</b>	<b>SOLO100W-350</b>
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

**Petit\_2Q | Path-marker | powerLED | Damp location | Driver remote | 2W 630mA**



▶ 659 Recessed casing  
**E84901**



Efficiency - CRI 80

White	<b>E92417</b>	2700 K	219 lm	<b>M</b>	Narrow Spot	<b>05</b>
Nickel	<b>E92419</b>	3000 K	233 lm	<b>W</b>		
		3500 K	233 lm	<b>T</b>		
		4000 K	249 lm	<b>N</b>		

**Power supply options (remote only)**

<b>ECO30W-630</b>	<b>SOLO50W-630</b>	<b>SOLO100W-630</b>
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures