


petit




Square or round-shaped, Petit has two small slots with extremely small emission angle. A step light conceived for prompt lighting of significant architectural elements along corridors, staircases and transit areas.

Materials

Brass or aluminum body

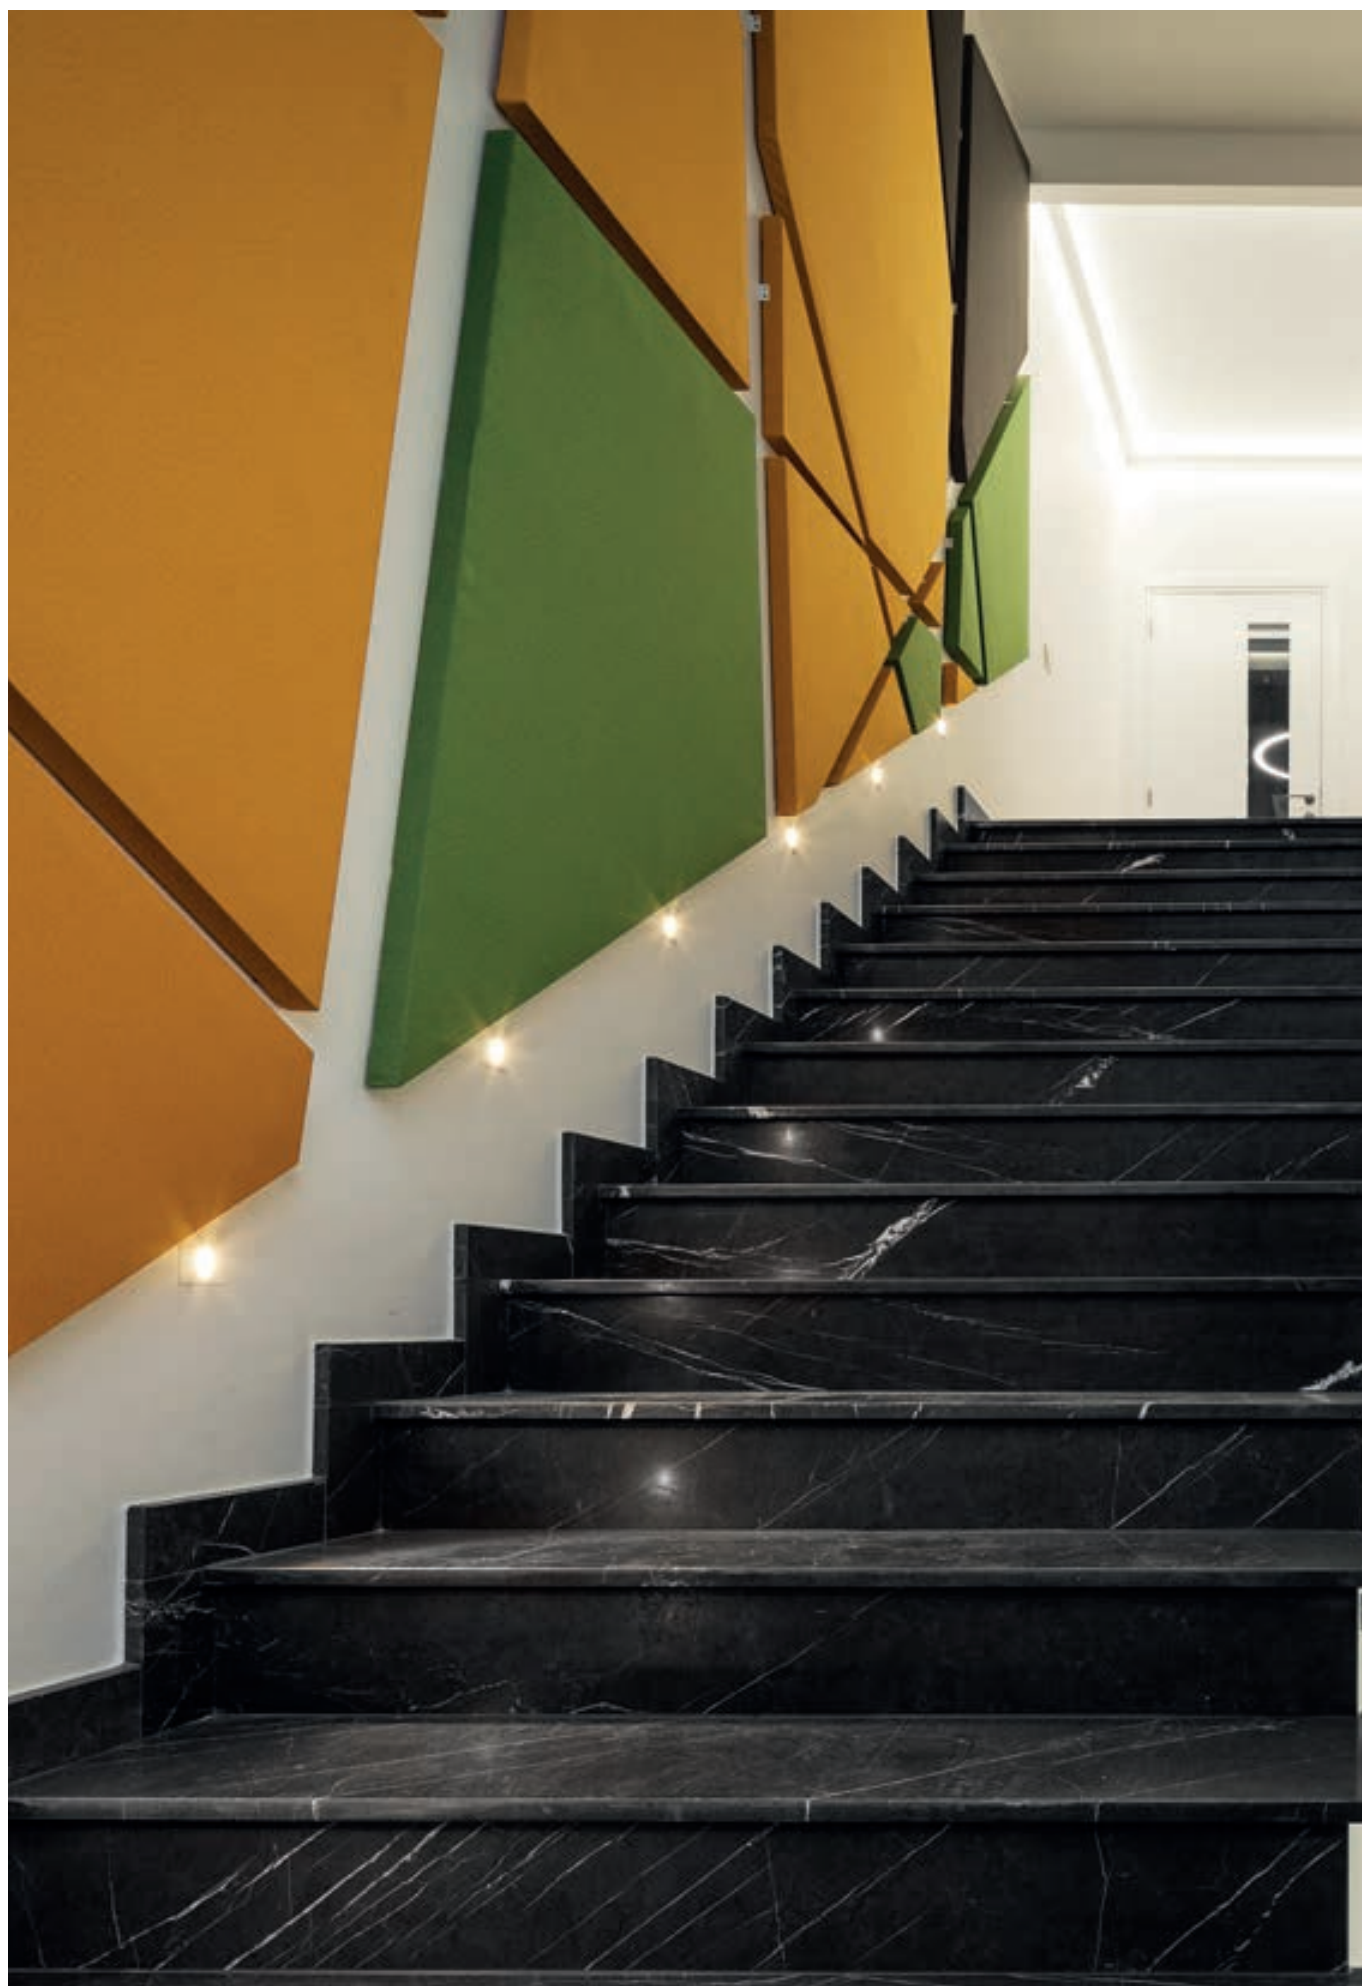

Petit_R | Path-marker | powerLED | Driver remote | 1W 350mA



Efficiency - CRI


White	E92316	2700 K	98 lm	M	Narrow Spot	05
Nickel	E92318	3000 K	107 lm	W		
		3500 K	107 lm	T		
		4000 K	114 lm	N		

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

659 Recessed casing
E84335

Petit_R | Path-marker | powerLED | Driver remote | 1.5W 500mA



Efficiency - CRI


White	E92320	2700 K	130 lm	M	Narrow Spot	05
Nickel	E92322	3000 K	143 lm	W		
		3500 K	143 lm	T		
		4000 K	152 lm	N		

Power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

659 Recessed casing
E84917

Petit_Q | Path-marker | powerLED | Driver remote | 1W 350mA



Efficiency - CRI


White	E92324	2700 K	98 lm	M	Narrow Spot	05
Nickel	E92326	3000 K	107 lm	W		
		3500 K	107 lm	T		
		4000 K	114 lm	N		

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

659 Recessed casing
E84335

Petit_Q | Path-marker | powerLED | Driver remote | 1.5W 500mA



Efficiency - CRI


White	E92328	2700 K	130 lm	M	Narrow Spot	05
Nickel	E92330	3000 K	143 lm	W		
		3500 K	143 lm	T		
		4000 K	152 lm	N		

Power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

659 Recessed casing
E84917

Petit_2R | Path-marker | powerLED | Damp location | Driver remote | 1W 350mA



Efficiency - CRI


White	E92405	2700 K	136 lm	M	Narrow Spot	05
Nickel	E92407	3000 K	145 lm	W		
		3500 K	145 lm	T		
		4000 K	155 lm	N		

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

659 Recessed casing
E84915/E84336

Petit_2R | Path-marker | powerLED | Damp location | Driver remote | 2W 630mA



Efficiency - CRI


White	E92409	2700 K	219 lm	M	Narrow Spot	05
Nickel	E92411	3000 K	233 lm	W		
		3500 K	233 lm	T		
		4000 K	249 lm	N		

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

659 Recessed casing
E84901

Petit_2Q | Path-marker | powerLED | Damp location | Driver remote | 1W 350mA



Efficiency - CRI


White	E92413	2700 K	136 lm	M	Narrow Spot	05
Nickel	E92415	3000 K	145 lm	W		
		3500 K	145 lm	T		
		4000 K	155 lm	N		

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

659 Recessed casing
E84915/E84336

Petit_2Q | Path-marker | powerLED | Damp location | Driver remote | 2W 630mA



Efficiency - CRI

White	E92417	2700 K	219 lm	M	Narrow Spot	05
Nickel	E92419	3000 K	233 lm	W		
		3500 K	233 lm	T		
		4000 K	249 lm	N		

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

659 Recessed casing
E84901