


IP66 rated ceiling or panel recessed lockable eyeball fitting that finishes almost flush with the mount surface.

- Materials: Aluminum
- Color Temp: 2700K, 3000K, 3500K or 4000K
- Lamp: MSL Star (1 x Osram Oslon Square)
- IP Rating: IP66 (provided fitting is not pointing upwards)
- Optics: 0.8"Ø (20mm) optics. Please refer to the table below for beam angle options and ordering information. Snoots available.
- Finish: White (Standard) Pure White RAL 9010 30% gloss  
Black (Standard) Powdercoat Matte Black 5% gloss  
Custom paint and anodized finishes available
- Dimming: EldoLED 0-10V or DMX
- Driver: Constant current remote driver required  
Allow 2W at 700mA
- Cut out: 1.7" (Ø44mm)
- Locking: 1.5mm Allen key required
- Available Tilt: ±22°
- Weight: 0.44lb (0.2kg)

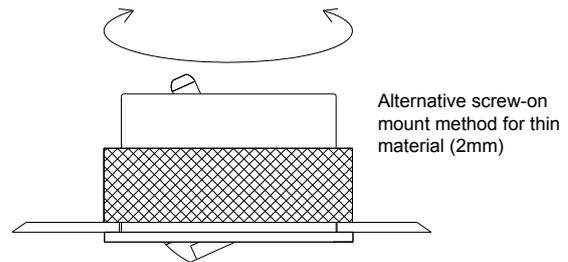

**LED Information**

Each LED "lamp" consists of one or more Osram Oslon Square power LED thermally bonded to an aluminum cored printed circuit board.

**MSL Star**

 Ø21mm PCB with a single Osram Oslon Square LED. For Ø20mm optics.

Order Code	series.col temp.beam.finish.dimming
Example	Iris.2700K.10°.white.D010

Series	Color	Beam	Finish	Dimming and control	Mounting Options	Snoot Options
Iris	2700K	10°	white	D010 0-10V	Spring clips (Standard) Screw-on method	SN Straight Snoot
	3000K	13°	black	DMX DMX		SN2 Angled Snoot
	3500K	19°	custom			
	4000K	35°				

Snoot Options:

