




Large surface mount lockable power LED spotlight with high output Xicato module and tight beams.

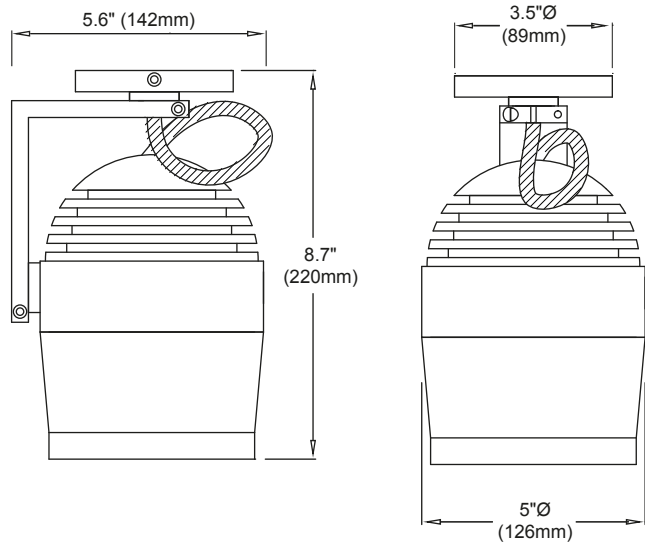

Materials:	Aluminum
Color Temp:	2700K, 3000K, 3500K or 4000K
Lamp:	Xicato XTM or XIM 9mm LES or 19mm LES LED Module
Output:	Please see table on second page. *Vibrant Series only available for 3000K*
CRI Ra:	≥80 or ≥95 Artist
Optics:	4.4"Ø (111mm) optics. Please refer to the table on the second page for beam options and ordering information. Takes two accessories.
Finish:	White (Standard) Pure White RAL 9010 30% gloss Black (Standard) Powdercoat Matte Black 5% gloss Custom paint and anodized finishes available
Dimming:	XIM 0-10V XTM EldoLED 0-10V, DMX, Integral or Dual Dim
Supply:	XIM 48V DC XTM Constant current remote driver
Locking:	2.5mm and 3mm Allen key required
Available Tilt:	± 90°
Weight:	4.4lb (2kg)
Accessories:	Please refer to the table on the second page for lenses, louvers, and accessories. Barn door and wall washing attachments are also available.

LED Information

This product uses the Xicato Module

Technical advantages of the Xicato Module:

- Color consistency Initial; 1 x 2 MacAdam ellipses
- Color consistency Maintained; 3 MacAdam ellipses
- Excellent color rendering
- Uniform beam
- No multiple shadowing

Xicato Thermal Validation Program Approved




STX2.111

inter•lux

Applications


Remote dimming
No local drivers

REMOTE DIMMING WHERE LOCAL DRIVERS NOT PRACTICAL
XICATO XIM 9MM OR 19MM
BUSSED 48V AND CONTROL

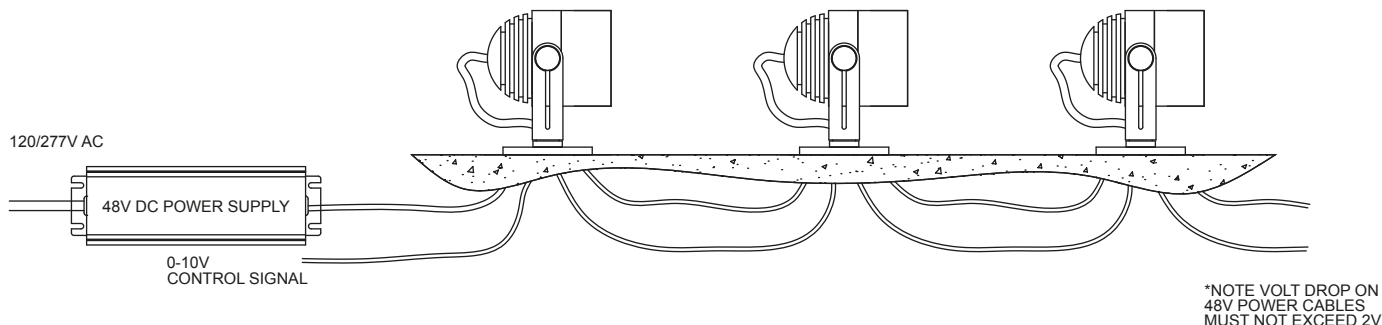

Remote dimming
Local drivers

REMOTE DIMMING WHERE LOCAL DRIVERS PREFERRED
XICATO XTM 9MM OR 19MM
MAINS AND CONTROL SIGNAL WIRING TO DRIVERS AT FITTINGS

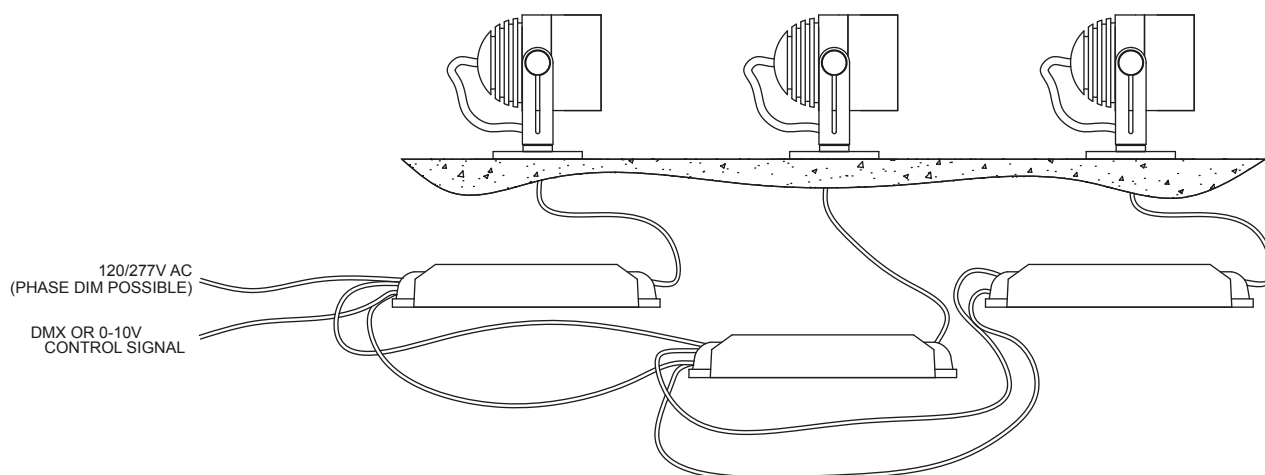

Order Code	series.col temp.module.lumen code.beam.finish.dimming
Example	STX2.111.3000K.XTM19.S82.43°.white.D010

Series	Color	Module Type	Lumen Code - Max output and CRI	Beam	Finish	Dimming and control	Lenses, Louvers and Accessories
STX2.111	2700K 3000K 3500K 4000K	XTM9 XTM 9mm LES	S82 Standard Series 82 2000lm 30.2 A95 Artist Series 95 1560lm 30.2 V80 Vibrant Series V80 2000lm 30.2* V95 Vibrant Series V95 1560lm 30.2*	08° 18° 31° 57°	white black custom	D010 Remote 0-10V DMX DMX IDIM Integral dimmer 2DIM Dual dim (integral dimmer and remote 0-10V)	SL Symmetrical spread lens TE Soft Elliptical spread lens PE Sharp Elliptical spread lens HL Honeycomb louver DL Dichroic lens BD Barn doors WW Wall washer SN Snoot
		XTM19 XTM 19mm LES	S82 Standard Series 82 3850lm 34.1 A95 Artist Series 95 3000lm 34.1 V80 Vibrant Series V80 3850lm 34.1* V95 Vibrant Series V95 3000lm34.1*	14° 24° 43° 58°			
		XIM9 XIM 9mm LES	S82 Standard Series 82 2000lm 30.2 A95 Artist Series 95 1300lm 30.2 V80 Vibrant Series V80 2000lm 30.2* V95 Vibrant Series V95 1300lm 30.2*	08° 18° 31° 57°	white black custom	D010 Remote 0-10V IDIM Integral dimmer	
		XIM19 XIM 19mm LES	S82 Standard Series 82 3000lm 34.1 A95 Artist Series 95 2000lm 34.1 V80 Vibrant Series V80 3000lm 34.1* V95 Vibrant Series V95 2000lm 34.1*	14° 24° 43° 58°			

Xicato Thermal Validation Program Approved

STOANE LIGHTING

410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.