


Epitax | Downlight | powerLED | Damp Location | Driver remote | 2W 630mA



Balance - CRI 92

White	<b>E80632</b>	2700 K	157 lm	<b>M</b>	Narrow Spot	<b>8</b>
Black	<b>E80633</b>	3000 K	179 lm	<b>W</b>	Spot	<b>15</b>
Gold	<b>E80745</b>	3500 K	179 lm	<b>T</b>	Medium Flood	<b>30</b>
					Flood	<b>60</b>







Efficiency - CRI 80

White	<b>E80630</b>	2700 K	219 lm	<b>M</b>	Narrow Spot	<b>8</b>
Black	<b>E80631</b>	3000 K	233 lm	<b>W</b>	Spot	<b>15</b>
Gold	<b>E80744</b>	3500 K	233 lm	<b>T</b>	Medium Flood	<b>30</b>
		4000 K	249 lm	<b>N</b>	Flood	<b>60</b>


Power supply options (remote only)

<b>ECO30W-630</b> 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	<b>SOLO50W-630</b> 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	<b>SOLO100W-630</b> 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
--	--	--

Recessed casing required

 1.5	 Ø 1.2 <b>E98501</b> Recessed casing for flush installation	 1.4	 Ø 1.3 <b>E98527</b> <b>E98528</b> <b>E98529</b> Recessed casing with flange
	 1.1 Ø 1.5		 1.1 Ø 1.7

Epitax | Downlight | powerLED | Damp Location | Driver remote | 4W 350mA



Balance - CRI 92

White	<b>E80636</b>	2700 K	395 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80637</b>	3000 K	423 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80747</b>	3500 K	423 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	456 lm	<b>N</b>		

Efficiency - CRI 80

White	<b>E80634</b>	2700 K	490 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80635</b>	3000 K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80746</b>	3500 K	490 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	529 lm	<b>N</b>		

Power supply options (remote only)


<b>ECO30W-350</b> 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	<b>SOLO50W-350</b> 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	<b>SOLO100W-350</b> 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
---	---	--

Recessed casing required

 1.5	 Ø 1.2 <b>E98501</b> Recessed casing for flush installation	 1.4	 Ø 1.3 <b>E98527</b> <b>E98528</b> <b>E98529</b> Recessed casing with flange
	 1.1 Ø 1.5		 1.1 Ø 1.7

technical information

Epitax | Downlight | powerLED | Damp Location | Driver remote | 6W 500mA



Balance - CRI 92

White	<b>E80640</b>	2700 K	532 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80641</b>	3000 K	569 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80749</b>	3500 K	569 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	614 lm	<b>N</b>		

Efficiency - CRI 80

White	<b>E80638</b>	2700 K	659 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80639</b>	3000 K	659 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80748</b>	3500 K	659 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	711 lm	<b>N</b>		


Power supply options (remote only)

<b>ECO30W-500</b> 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	<b>SOLO50W-500</b> 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	<b>SOLO100W-500</b> 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
---	---	--

Recessed casing required

 Ø 1.4 1.1 1.6	<p><b>E98502</b></p> <p>Recessed casing for flush installation</p>	 Ø 1.5 1.1 1.6	<table border="1"> <tr> <td>White</td> <td><b>E98530</b></td> </tr> <tr> <td>Black</td> <td><b>E98531</b></td> </tr> <tr> <td>Gold</td> <td><b>E98532</b></td> </tr> </table> <p>Recessed casing with flange</p>	White	<b>E98530</b>	Black	<b>E98531</b>	Gold	<b>E98532</b>
White	<b>E98530</b>								
Black	<b>E98531</b>								
Gold	<b>E98532</b>								

Epitax | Downlight | powerLED | Damp Location | Driver remote | 10W 800mA



Balance - CRI 92

White	<b>E80595</b>	2700 K	960 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80596</b>	3000 K	1034 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80751</b>	3500 K	1034 lm	<b>T</b>	Flood	<b>45</b>
		4000 K	1108 lm	<b>N</b>		



Efficiency - CRI 80

White	<b>E80591</b>	2700 K	1108 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80592</b>	3000 K	1194 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80750</b>	3500 K	1194 lm	<b>T</b>	Flood	<b>45</b>
		4000 K	1280 lm	<b>N</b>		

Power supply options (remote only)


<b>ECO30W-800</b> 0-10V EldoLED ECOdrive 30W for 1-2 fixtures	<b>SOLO100W-800</b> 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	---

Recessed casing required

 Ø 2.9 1.7 2.9/3	<p><b>E98499</b></p> <p>Recessed casing for flush installation</p>	 Ø 2.6 1.7 3	<table border="1"> <tr> <td>White</td> <td><b>E98533</b></td> </tr> <tr> <td>Black</td> <td><b>E98534</b></td> </tr> <tr> <td>Gold</td> <td><b>E98535</b></td> </tr> </table> <p>Recessed casing with flange</p>	White	<b>E98533</b>	Black	<b>E98534</b>	Gold	<b>E98535</b>
White	<b>E98533</b>								
Black	<b>E98534</b>								
Gold	<b>E98535</b>								

technical information

Epitax | Downlight | powerLED | Damp Location | Driver remote | 15W 400mA

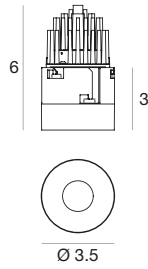

Balance - CRI 92

White	<b>E80603</b>	2700 K	1568 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80604</b>	3000 K	1677 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80753</b>	3500 K	1677 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	1804 lm	<b>N</b>		

Efficiency - CRI 80

White	<b>E80599</b>	2700 K	1932 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80600</b>	3000 K	1932 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80752</b>	3500 K	1932 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	2078 lm	<b>N</b>		

Power supply options (remote only)

**ECO30W-400**

0-10V EldoLED ECOdrive  
30W for 1 fixture


**SOLO50W-400**

0-10V EldoLED SOLOdrive  
50W for 1-2 fixtures

**SOLO100W-400**

0-10V EldoLED SOLOdrive  
100W for 1-4 fixtures

Recessed casing required

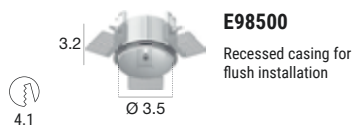

technical information