


DOPPIO ELLIPSE

DIRECT / INDIRECT

Housing: Elliptical aluminum profile with integrated acrylic covers on up- and downside.
 Design: SATTLER

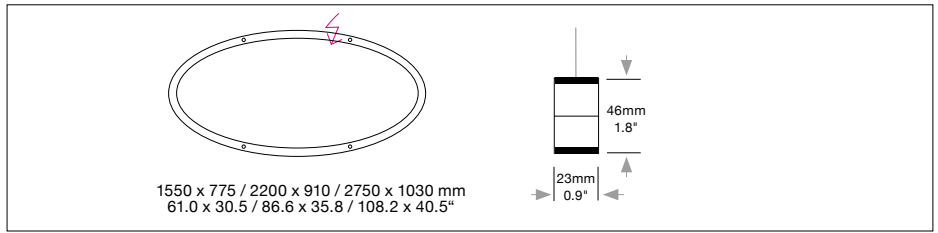


Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes												
1550 x 775 mm	61.0 x 30.5"	70/28	2,550/1,297	12 / 26.4	1091.	x x.	x x.	x x.	x x.	x x x.	x	
2200 x 910 mm	86.6 x 35.8"	88/40	4,003/1,853	19 / 41.8	1092.	x x.	x x.	x x.	x x.	x x x.	x	
2750 x 1030 mm	108.2 x 40.5"	116/50	4,962/2,316	22 / 48.5	1093.	x x.	x x.	x x.	x x.	x x x.	x	
Indirect												
Direct												
Direct and indirect light separately switchable. If ordered with dimmer also separately dimmable												
DIRECT LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white	3000 K 4000 K 2700 K	(Standard) (Optional) (Optional)	x x x. x x x. x x x.	30. 40. 27.	x x. x x. x x.	x x. x x. x x.	x x. x x. x x.	x x x. x x x. x x x.	x x x	
INDIRECT LED LED 24V CRI > 90 *CRI > 80	 	Warm-white Neutral-white Extra warm-white RGB color control*	3000 K 4000 K 2700 K	(Standard) (Optional) (Optional) (Optional)	x x x. x x x. x x x. x x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	30. 40. 27. 60.	x x. x x. x x. x x.	x x x. x x x. x x x. x x x.	x x x x	
Indirect light is significantly weaker than direct light output												
Dimming		Dimmable 0 - 10 V DMX (RGB possible)		(Standard) (Optional)	x x x. x x x.	x x. x x.	52. 32.	x x. x x.	x x. x x.	x x x. x x x.	x x	
Finishes												
(Standard)	11 white	(Optional)	22 aluminum polished	27 brush-finished aluminum	30 anthracite	32 crocodile black	33 sand silver fine textured	35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured
	XX Custom finish											
							x x x.	x x.	x x.	x x.		x x x.
												x
Power Supply Cable												
(Standard)	Z 70 Silver	(Optional)	Z 71 white	Z 72 grey	Z 73 black	Z 74 orange	Z 75 red	Z 76 green				
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank												
							x x x.	x x.	x x.	x x.		x x x.
												x

1) Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.


DOPPIO ELLIPSE DIRECT / INDIRECT




Housing: Elliptical aluminum profile with integrated acrylic covers on up- and downside.
Design: SATTLER

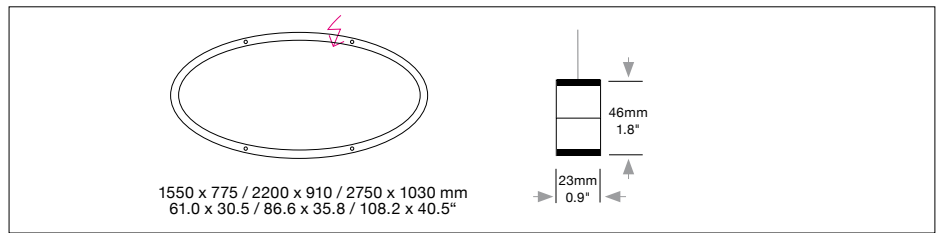


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




up to 1550 mm / 61"
Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




up to 1550 mm / 61"
Suspension with pendant canopy PB 656 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"




up to 1550 mm / 61"
Suspension with pendant canopy PB 656 and current-carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F, S, T, K = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture


Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118";
Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A, G, R, K	


Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



Dimensions of canopy			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body / H		
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F	
PB 656	Ø 90 H 656 mm / 3.5 x 25.8"	S, T	

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional



Ceiling mounting version A, G

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution
direct / indirect



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

- 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
- 2) Weight of lights without remote technical unit or canopy.