




# DOPPIO ELLIPSE DIRECT







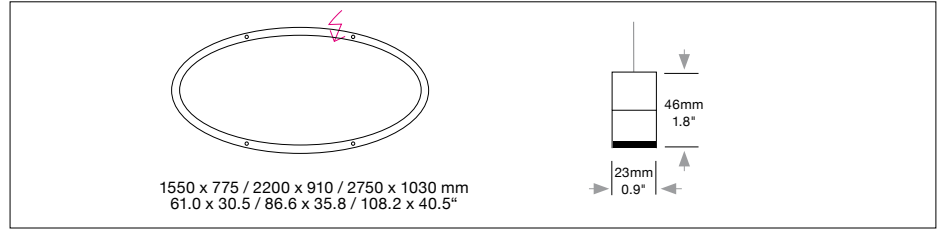







Housing: Elliptical aluminum profile with integrated acrylic cover on the downside.  
Design: SATTLER











Sizes	Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
 Direct	1550 x 775 mm	61.0 x 30.5"	70	2,550	12 / 26.4	<b>1091.</b>	x x .	x x .	x x .	x x .	x x x .	x
	2200 x 910 mm	86.6 x 35.8"	88	4,003	19 / 41.8	<b>1092.</b>	x x .	x x .	x x .	x x .	x x x .	x
	2750 x 1030 mm	108.2 x 40.5"	116	4,962	22 / 48.5	<b>1093.</b>	x x .	x x .	x x .	x x .	x x x .	x

LED												
24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white	3000 K 4000 K 2700 K	(Standard) (Optional) (Optional)	x x x . x x x . x x x .	<b>30.</b> <b>40.</b> <b>27.</b>	x x . x x . x x .	x x . x x . x x .	x x . x x . x x .	x x . x x . x x .	x x x . x x x . x x x .	x x x

Dimming												
		Dimmable 0 - 10 V		(Standard)	x x x .	x x .	<b>51.</b>	<b>00.</b>	x x .	x x .	x x x .	x

Finishes													
(Standard)		<b>11</b> white	(Optional)		<b>22*</b> aluminum polished		<b>27*</b> brush-finished aluminum		<b>30</b> anthracite		<b>32</b> crocodile black		<b>33</b> sand silver fine textured
					<b>35</b> gold		<b>36</b> brass		<b>37</b> bronze fine textured		<b>38</b> copper		<b>10</b> black fine textured
				*22, 27 Ring aluminum polished or brush-finished Top cover black			<b>XX</b> Custom finish	x x x .	x x .	x x .	x x .		x x x .


Power Supply Cable													
(Standard)		<b>Z 70</b> Silver	(Optional)		<b>Z 71</b> white		<b>Z 72</b> grey		<b>Z 73</b> black				
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank					<b>Z 74</b> orange		<b>Z 75</b> red		<b>Z 76</b> green	x x x .	x x .	x x .	x x .
													x

1) Net lumen output: Losses due to diffusers and reflectors are considered.  
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
2) Weight of lights without remote technical unit or canopy.


## DOPPIO ELLIPSE DIRECT




Housing: Elliptical aluminum profile with integrated acrylic cover on the downside.  
Design: SATTLER

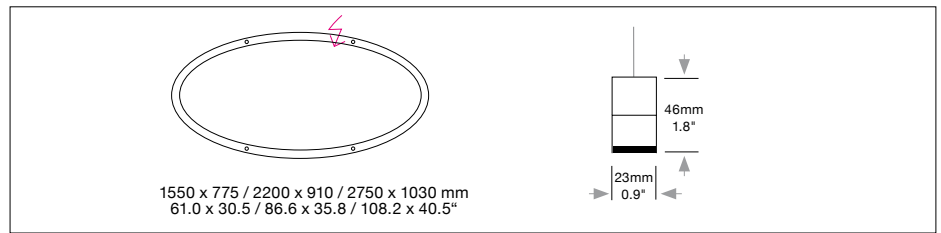


### Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




up to 1550 mm / 61" Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




up to 1550 mm / 61" Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




up to 1550 mm / 61" Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394"


E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm / 118" and power supply cable 3000mm / 118"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units			
Typ	Size mm / inch		For use with Mounting Version
	L	W H	
DE 1F	360 x 150 x	85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K (up to Ø 1500 mm)
DE 2F	360 x 300 x	85 mm / 14.2 x 11.8 x 3.3"	A, G, R, K (up to Ø 3500 mm)




Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dimensions of canopy			
Typ	Size mm / inch		For use with Mounting Version
	Ø cover plate	Ø body / body / H	
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	11.4 x 10.2 / 2.3"	B, E, F (up to 2200 x 910 x 85 / 86.6 x 35.8 x 3.3")
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	13.7 x 12.5 / 2.3"	B, E, F (2700 x 1030 x 85 / 106.3 x 40.5 x 3.3")
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"	366 mm / 14.4"	S, T

Canopy finish: white (11) contact factory for other finishes  
USA/Canada: Canopy mounts to 4" octagonal junction box.

### Optional



#### Ceiling mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.