


DOPPIO ELLIPSE DIRECT

Housing: Elliptical aluminum profile with integrated acrylic cover on the downside.
Design: SATTLER

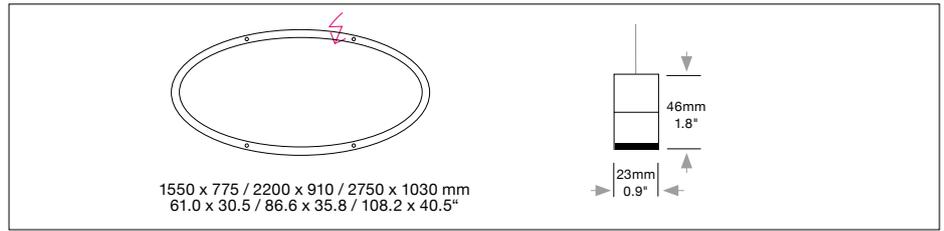


Sizes	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
 Direct	1550 x 775 mm	61.0 x 30.5"	70	2,550	12 / 26.4	1091.	x x .	x x .	x x .	x x .	x x x .	x
	2200 x 910 mm	86.6 x 35.8"	88	4,003	19 / 41.8	1092.	x x .	x x .	x x .	x x .	x x x .	x
	2750 x 1030 mm	108.2 x 40.5"	116	4,962	22 / 48.5	1093.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white	3000 K 4000 K 2700 K	((Standard)) (Optional) (Optional)	x x x . x x x . x x x .	30. 40. 27.	x x . x x . x x .	x x . x x . x x .	x x . x x . x x .	x x x . x x x . x x x .	x x x	
Dimming		Dimmable 0 - 10 V		(Standard)	x x x .	x x .	51.	00.	x x .	x x x .	x	
Finishes	(Standard)  11 white (Optional)  22 * aluminum polished  27 * brush-finished aluminum  30 anthracite  32 crocodile black  33 sand silver fine textured  35 gold  36 brass  37 bronze fine textured  38 copper  10 black fine textured  XX Custom finish	*22, 27 Ring aluminum polished or brush-finished Top cover black	x x x . x x . x x . x x . . . x x x . x									
Power Supply Cable	(Standard)  Z 70 Silver (Optional)  Z 71 white  Z 72 grey  Z 73 black  Z 74 orange  Z 75 red  Z 76 green	When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank	x x x . x x . x x . x x . x x x									


DOPPIO ELLIPSE DIRECT




Housing: Elliptical aluminum profile with integrated acrylic cover on the downside.
Design: SATTLER

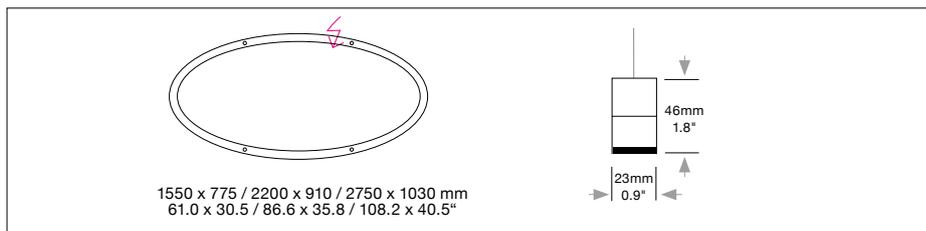


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




up to 1550 mm / 61" Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




up to 1550 mm / 61" Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




up to 1550 mm / 61" Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394"


E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm / 118" and power supply cable 3000mm / 118"

X X X.	X X X	X				
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,G,R,K (up to Ø 1500 mm)	
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A,G,R,K (up to Ø 3500 mm)	



Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dimensions of canopy			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body / H		
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3" (up to 2200 x 910 x 85 / 86.6 x 35.8 x 3.3")	B, E, F	
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3" (2700 x 1030 x 85 / 106.3 x 40.5 x 3.3")	B, E, F	
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"	S, T	


Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional



LED spot in canopy
4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

200. 00. 00. 00. 11 (white)