


SLIM ELLIPSE DIRECT

Housing: Elliptical aluminum profile with integrated acrylic cover downwards
Design: SATTLER

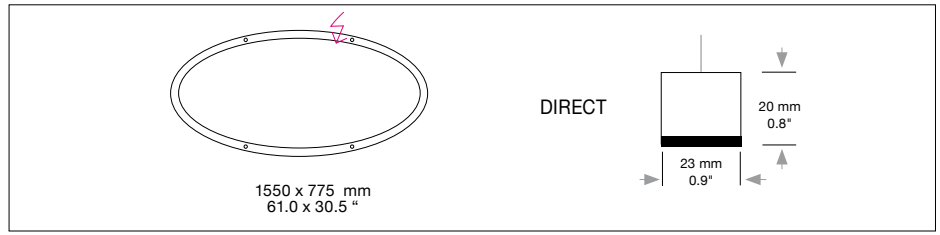


	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes	1550 x 775	61.0 x 30.5	70	3,009	6 / 13.2	738.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 *CRI > 80			Warm-white Neutral-white Extra warm-white Extra warm-white RGB color control** ** (only in combination with dimming DMX, DALI)	3000 K 4000 K 2700 K 2200 K* (Optional)	((Standard)) (Optional) (Optional) (Optional) (Optional)	x x x . x x x . x x x . x x x . x x x .	30. 40. 27. 22. 60.	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x .	x x x x x
Dimming			Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)	(Standard) (Optional) (Optional)		x x x . x x x . x x x .	x x . x x . x x .	51. 31. 71.	00. 00. 00.	x x . x x . x x .	x x x . x x x . x x x .	x x x
Finishes		(Standard)	11 white	(Optional)								
			22 aluminum polished		27 brush-finished aluminum		30 anthracite		32 crocodile black		33 sand silver fine textured	
			35 gold		36 brass		37 bronze fine textured		38 copper		10 black fine textured	
							XX Custom finish					x x x . x x . x x . x x . x x . x x x . x
Power Supply Cable (Standard)		(Optional)	000 without Mounting Version F									
				Z 70 Silver		Z 71 white		Z 72 grey		Z 73 black		
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank				Z 74 orange		Z 75 red		Z 76 green				x x x . x x . x x . x x . x x . x x x . x

1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.


SLIM ELLIPSE DIRECT




Housing: Elliptical aluminum profile with integrated acrylic cover downwards
Design: SATTLER

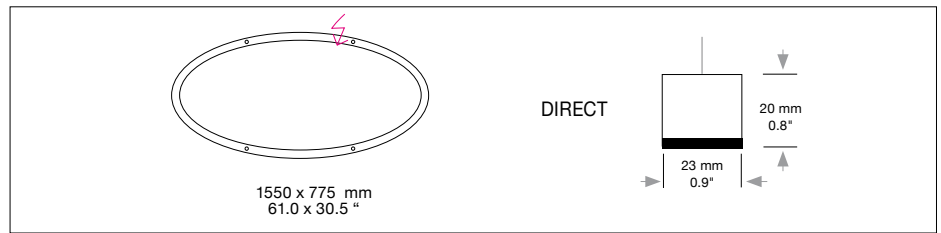


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.




Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394"


S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118"; Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Typ	Size mm / inch			For use with Mounting Version
	L	W	H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K		


Input voltage for all external power supply units and canopy is
120 / 277 VAC 50/60 Hz

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.



Typ	Size mm / inch		For use with Mounting Version
	Ø cover plate	Ø body	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"		B, E, F
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"		S, T

Optional



Ceiling mounting version A, G

200. 00. 00. 00. 11. (white)
Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution direct



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

- 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
- 2) Weight of lights without remote technical unit or canopy.