


60 Linear Suspended Direct / Indirect Flush Lens

DIRECT ONLY

WG-60LDI-...-OD-XX-XX-...-W

Delivered Lumens Per Foot

		Power					RGBW [7.6 W/ft] ¹
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹	
CCT	927	361	678	1042	1534	-	
	930	376	705	1085	1598	-	
	935	389	731	1124	1673	-	
	940	399	750	1154	1718	-	
	TW ¹	-	337	518	-	-	
	RGBW ¹	-	-	-	-	284	



BEAM ANGLE (0-180) = 104.4
BEAM ANGLE (90-270) = 103.2

ILLUMINANCE - 48" OD P4 3500K


WG-60LDI-...-S-48-935-P4-OD-XX-XX-...-W²

Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
2	651	5.2
4	163	10.3
6	72	15.5
8	41	20.6
10	26	25.8
12	18	30.9
14	13	36.1
16	10	41.2
18	8	46.4
20	7	51.6

WG-60LDI-...-DD-W

Delivered Lumens Per Foot

		Power					RGBW [7.6 W/ft] ¹
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹	
CCT	927	347	652	1003	1477	-	
	930	361	679	1044	1538	-	
	935	374	703	1082	1611	-	
	940	384	722	1111	1654	-	
	TW ¹	-	324	499	-	-	
	RGBW ¹	-	-	-	-	274	

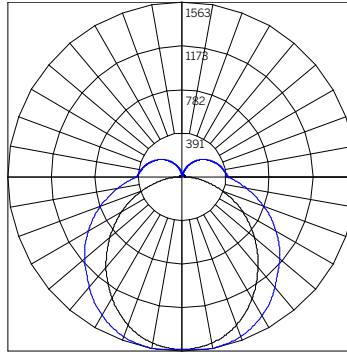

BEAM ANGLE (0-180) = 123.0
BEAM ANGLE (90-270) = 106.6

ILLUMINANCE - 48" DD P4 3000K

WG-60LDI-...-S-48-935-P4-...-DD-W²

Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
2	391	7.4
4	98	14.7
6	43	22.1
8	24	29.5
10	16	36.9
12	11	44.2
14	8	51.6
16	6	59.0
18	5	66.4
20	4	73.7

Power Multiplier					
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
	0.23	0.44	0.67	1.00	0.17

CCT Multiplier					
	927	930	935	940	TW ¹
	0.96	1.00	1.05	1.08	0.46

1 TW Tuneable White lumen data at maximum output / 4000K CCT. RGBW lumen data at maximum output for all colors + white.

2 Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.


60 Linear Suspended Direct / Indirect Flush Lens

INDIRECT ONLY

WG-60LDI-...-XX-XX-...-OD-...-W

Delivered Lumens Per Foot

		Power				
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
CCT	927	361	678	1042	1534	-
	930	376	705	1085	1598	-
	935	389	731	1124	1673	-
	940	399	750	1154	1718	-
	TW ¹	-	337	518	-	-
	RGBW ¹	-	-	-	-	284

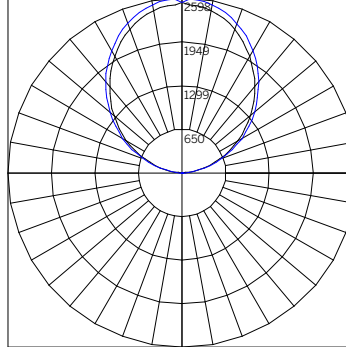

BEAM ANGLE (0-180) = 104.4
BEAM ANGLE (90-270) = 103.2


ILLUMINANCE - 48" OD P4 3500K WG-60LDI-...-S-48-XX-XXX-XX-P4-935-...-OD-W²

Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
20	7	51.6
18	8	46.4
16	10	41.2
14	13	36.1
12	18	30.9
10	26	25.8
8	41	20.6
6	72	15.5
4	163	10.3
2	651	5.2

WG-60LDI-...-XX-XX-...-SD-...-W

Delivered Lumens Per Foot

		Power				
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
CCT	927	387	728	1119	1648	-
	930	403	757	1165	1716	-
	935	418	785	1207	1797	-
	940	429	806	1239	1845	-
	TW ¹	-	362	556	-	-
	RGBW ¹	-	-	-	-	305

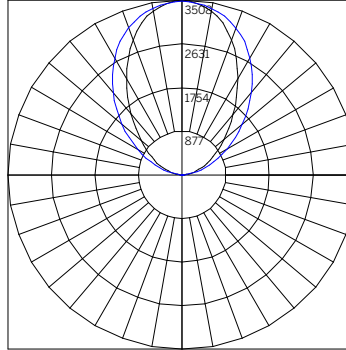

BEAM ANGLE (0-180) = 94.4
BEAM ANGLE (90-270) = 115.0

ILLUMINANCE - 48" SD P4 3500K WG-60LDI-...-S-48-XX-XXX-XX-P4-935-...-SD-W²

Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
20	9	43.2
18	11	38.9
16	14	34.5
14	18	30.2
12	24	25.9
10	35	21.6
8	55	17.3
6	97	13.0
4	219	8.6
2	877	4.3

Power Multiplier					
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
	0.23	0.44	0.67	1.00	0.17

CCT Multiplier					
	927	930	935	940	TW ¹
	0.96	1.00	1.05	1.08	0.46

1 TW Tuneable White lumen data at maximum output / 4000K CCT. RGBW lumen data at maximum output for all colors + white.

2 Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.