


20 Linear Wand



whitegoods

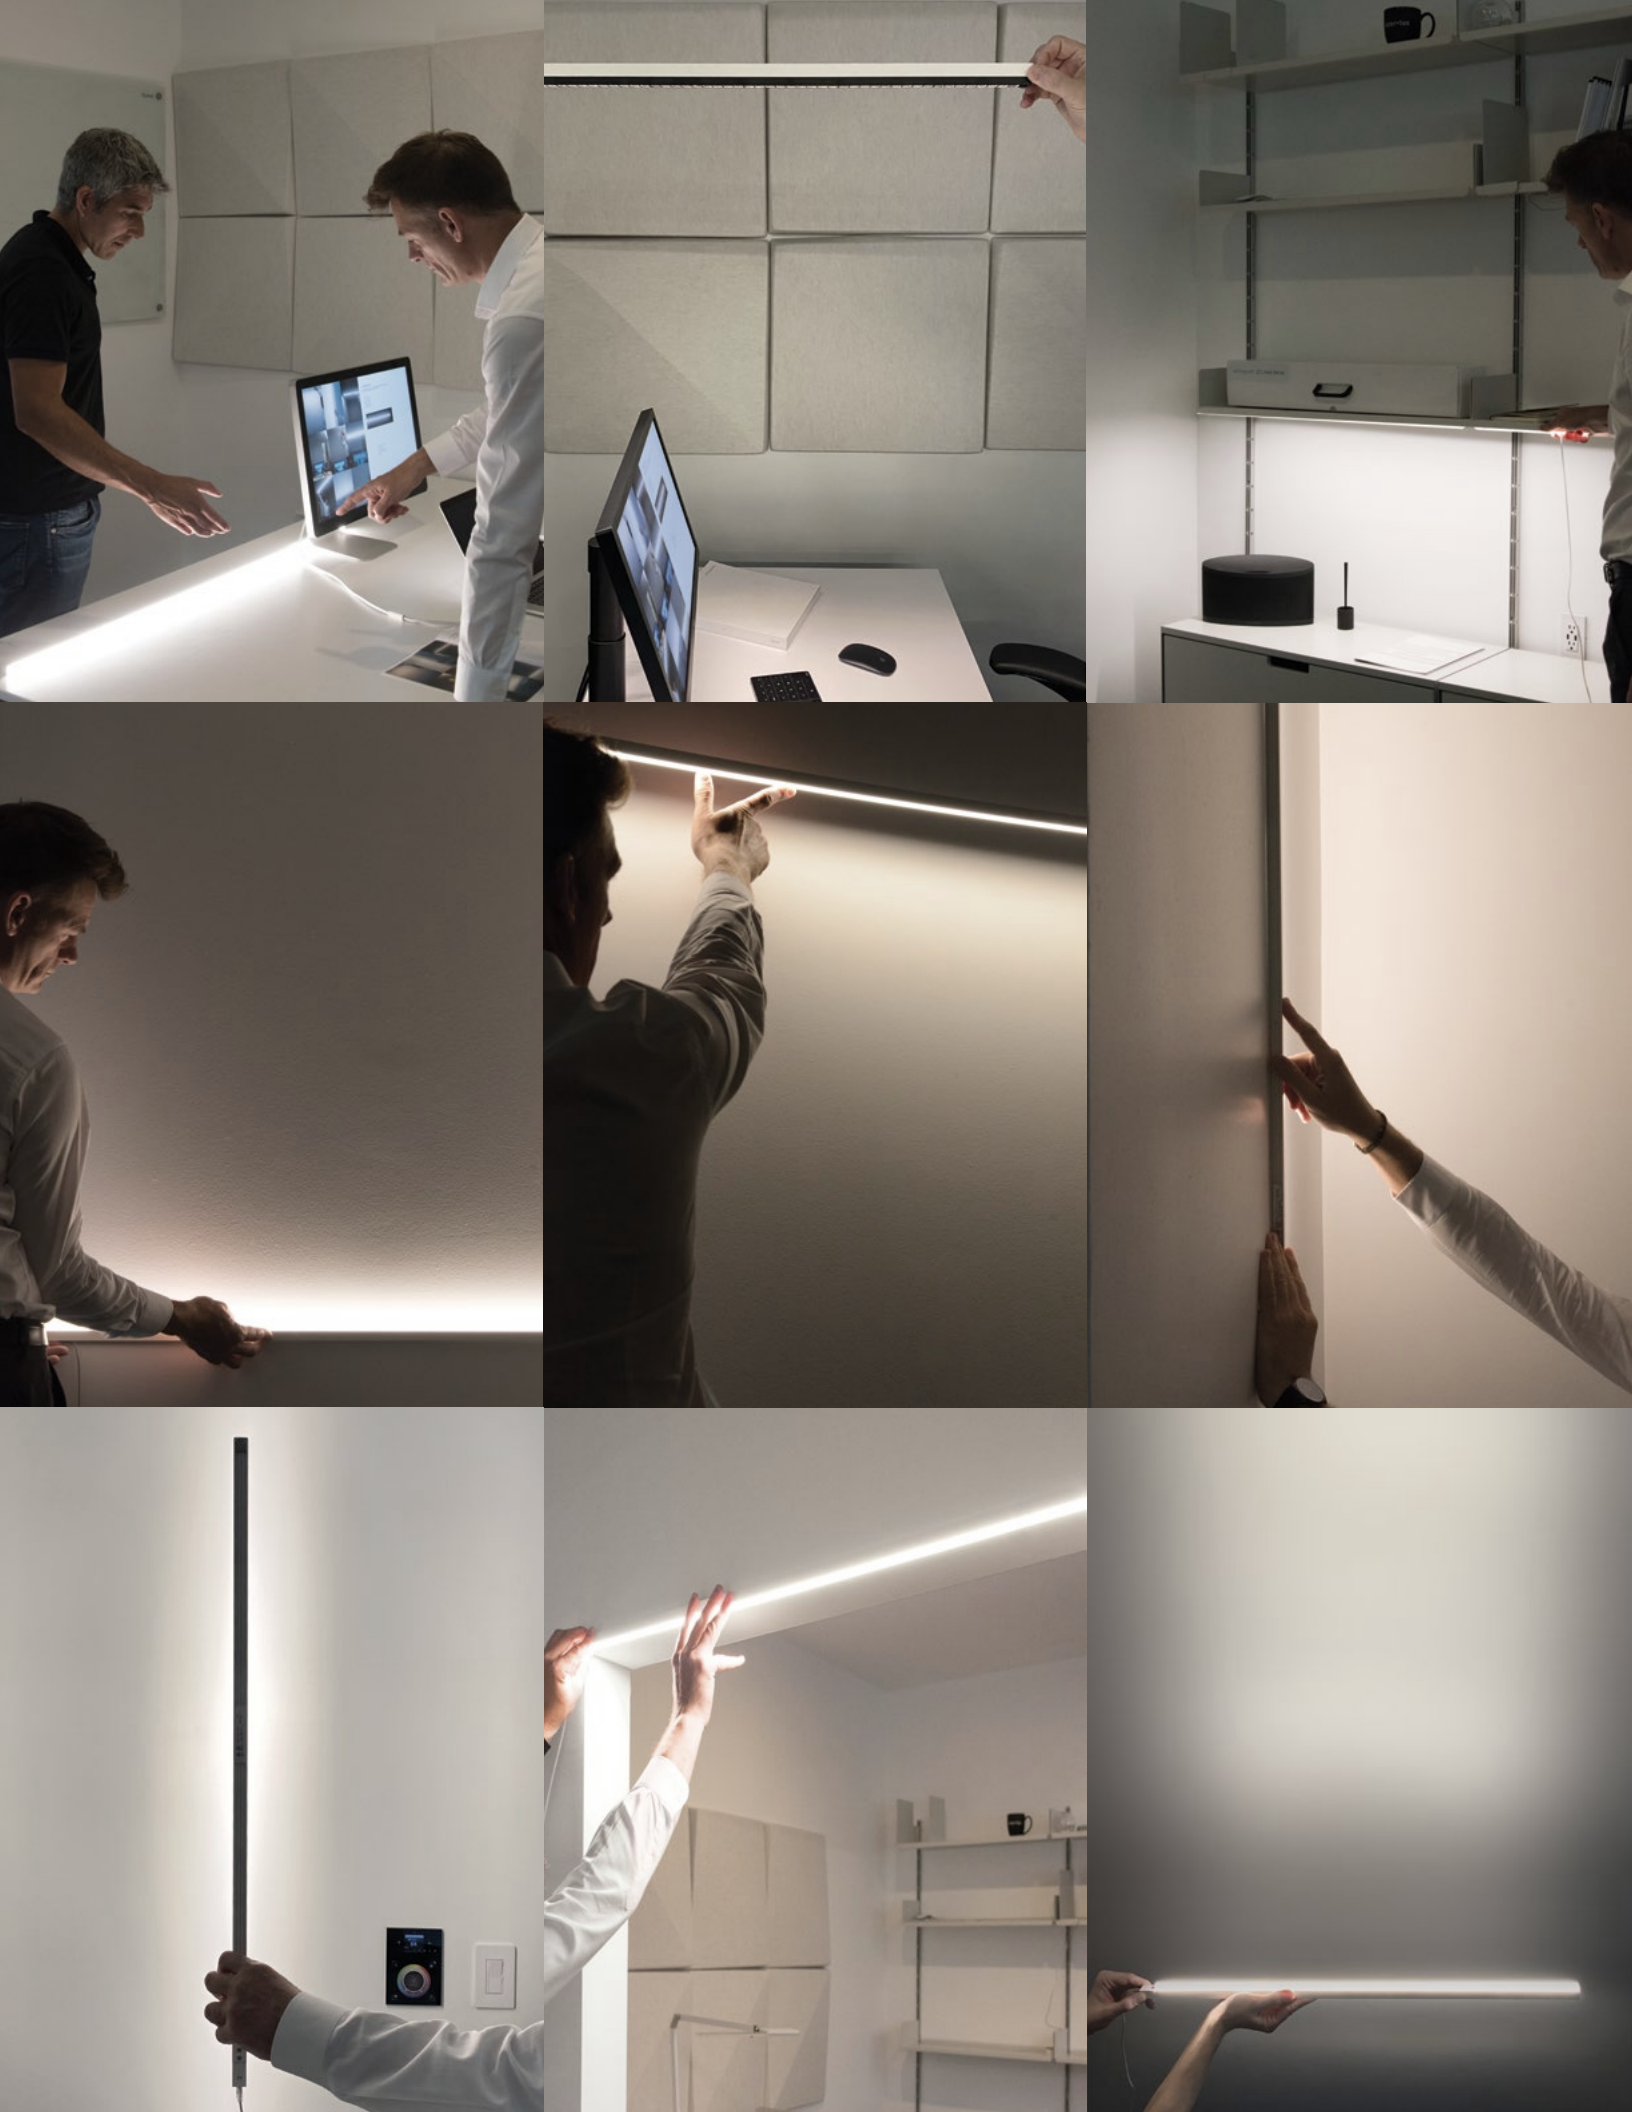

20 Linear Wand

We developed the 20 Linear Wand to allow specifiers to see for themselves just how flexible and multitalented the 20 Linear range really is.

Direct it up, down, vertically, horizontally, adjacent to a wall, the floor, a frosted panel or tuck it under a shelf. You'll soon find this is an indispensable tool for mocking up your ideas with light.

The Whitegoods Wand is provided with plenty of cable, a simple plug top driver, magnets to snap to metal surfaces, and multiple lens options.



Satin opal diffuser/
Satin clear diffuse
Micro-prismatic lens



Linear narrow lens,
16 degree



Linear louver




Block Diffuser




Round opal diffuser


General




45° Cut Off




Narrow lens




Concealed Uplight




Cove




Floor Wash



Ceiling Slot



Wall Graze



20 Linear Wand



Luminaire

- Multiple lens options for diffuse, high efficiency and luminous effect.
- Field replaceable LED boards.
- White finish standard.
- On / Off switch with 118" cable and plug, standard.
- 90+ CRI, 3 steps MacAdam.
- L70 (TM21 Projected 85C) Static White 60,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- MM = Magnetic mounting

Type

- S = Straight run

Length

Total length includes 1" for switch, requires 1" clearance for cable

- 28.5 = 28.5"

Power¹

- M = 6W/ft mid power (24V)

CRI/CCT (90+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Driver (plug-in)³

- S = Standard driver 120 - 240V, 50 - 60 Hz


Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser
- MPL = Micro-prismatic lens
- NL16 = Linear narrow lens, 16°
- LL45B = Linear louver black
- LL45W = Linear louver white
- LL45S = Linear louver satin
- BDO = Block Diffuser Opal
- BDC = Block Diffuser Clear
- ROD = Round opal diffuser


Finish⁴

- W = White, 15% gloss, RAL 9010 / Tiger Drylac 009/10120 (standard)

- 1 Wattage shown is for LED boards only, system wattage varies depending on driver selected.
- 2 See photometric data sheet for delivered lumens.
- 3 24V fixture supplied complete with individual socket mount power supply 120-240V, 50-60 Hz and feed cable.
- 4 See Tiger Drylac color chart: inter-lux.com/tiger

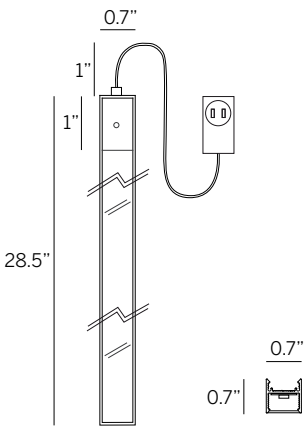

Lenses/Accessories

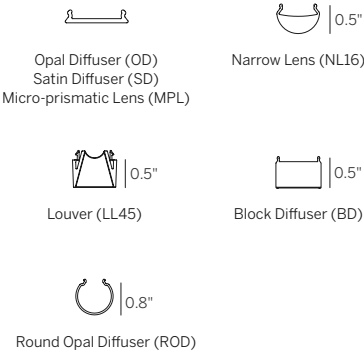

Ordering Information								
Model	Fixation	Type	Length	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish
WG-WAND	MM	S	29.5	M	927 930 935 940	S	OD (std) SD MPL NL16 LL45B LL45W LL45S BDO BDC ROD	W