

whitegoods

Wand



inter•lux



Introducing the “Whitegoods Wand”

The 20 Linear family of products from Whitegoods are incredibly flexible lighting tools.


We have developed the Wand to allow specifiers to see for themselves just how flexible and multi talented the 20 Linear range really is.

Direct it up, down, vertically, horizontally, adjacent to a wall, the floor, a frosted panel or tuck it under a shelf. You'll soon find this is an indispensable tool for roughing out your ideas with light.


The Whitegoods Wand is provided with plenty of cable, a simple plug top driver and magnets to snap to metal surfaces.




General




Horizontal




Vertical




Concealed Uplight




Cove




Floor Wash



Ceiling Slot



Wall Graze



WAND 20 Linear LED

Specifications

whitegoods



Luminaire

- Standard Opal Diffuser for even illumination and no LED appearance.
- Field replaceable LED boards.
- 80+ CRI, 3 steps MacAdam.
- White finish standard.
- On / Off switch with 118" cable and plug, standard.

Type

- S = Straight run

Length

(total length includes 1" for switch, requires 1" clearance for cable)

- 31 = 31"

LED¹

- M = Mid Power (6.4W/ft)

Color / Lumens²

80+ CRI minimum (Mid)

- 830 = 3000K (466 lm/ft)
- 835 = 3500K (466 lm/ft)

Voltage

- US = 120V
- INTL = 120-240V, 50-60Hz

Power Supply (remote)³

- S = Standard non-dim driver


Diffuser

- OD = Opal diffuser (standard)

Mounting

- MM = Magnetic mounting

- 1 Wattage shown does not include power supplies/drivers.
- 2 Delivered lumens with opal diffuser shown.
- 3 24V fixture supplied complete with individual socket mount power supply 120-240V, 50-60 Hz and feed cable.

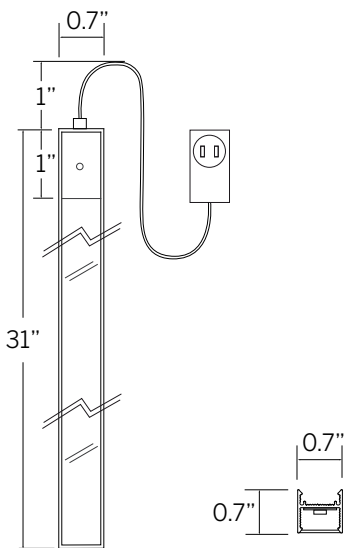

Ordering Information

Model	Type	Length	LED ¹	Color ²	Voltage	Power ³	Diffuser	Mount	Options
WG-WAND	S	31	M	830 835	US INTL	S	OD (std)	MM	