

bob18



Bob18 is specifically designed for urban spaces, with a special reflector and extra-clear glass diffuser distributing the light evenly and providing optimum ground visibility. The range includes a sleekly attractive bollard version and a path marker whose ground-hugging and comfortable light makes it ideal for footpaths and gardens.

Materials

Aluminum body with polyester powder coating and protective surface treatment
Extra-clear glass diffuser



bob18 lighting concept

Waterproof optics (IP66)

Pre-wired bollard head provided with a IP68 connector, allowing an easier installation and ensuring the maximum safe during electric connection.

- Die cast head
- 0.31-inch thick extra-clear toughened glass
- Satin-finished anodized aluminum radial reflector
- Powder-coated stainless steel casing
- Push-fit connector resistant to water (IP68)
- Steel base with top-loading bayonet and vandal-resistant integrated systems





Controlled emission

Extra pure aluminum internal diffuser was designed to maximize lighting uniformity and glare control; direct luminance is almost totally eliminated.





E64720W00

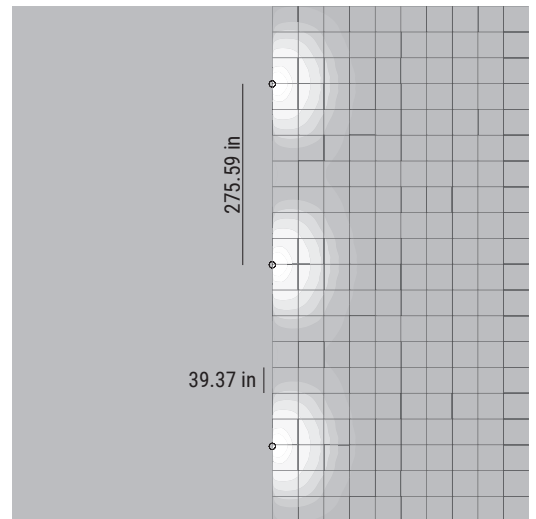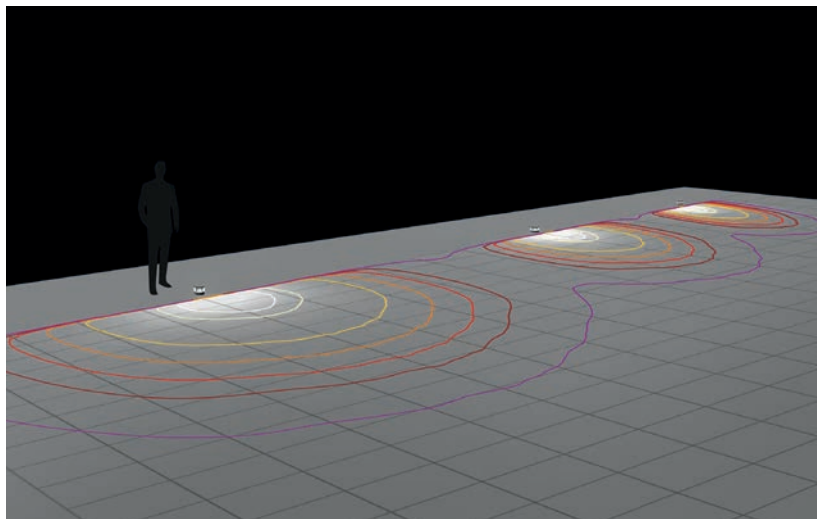

Floor plan

Bob18 | Bollards | topLED | Wet location | Driver remote | 13W




CRI 80

Grey	E64715	3000 K	1941 lm	W	General	00
BK Grey	E64716	4000 K	2060 lm	N		

Power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures


Bob18 | Bollards | topLED | 120-277V | Wet location | Integral Driver | 18W | 0-10V

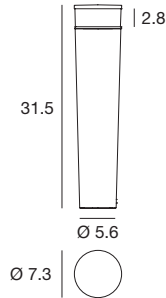

CRI 80

Grey	E64711	3000 K	2673 lm	W	General	00
BK Grey	E64712	4000 K	2832 lm	N		

Bob18 180 | Bollards | topLED | Wet location | Driver remote | 10W



CRI 80

Grey	E64719	3000 K	1318 lm	W	General	18
BK Grey	E64720	4000 K	1422 lm	N		

Power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures