



**JOE-BOGR-AE-...-GE...**  
Delivered Lumens - General Illumination

		Size [Wattage]	
		4 [11 ID]	20 [9 ID]
CCT	30-	380	380
	40-	380	380
		Polar Plot / Cone Of Light Multiplier	
		4 [11 ID]	20 [9 ID]
		1.00	1.00

**BUG Rating:** B0-U0-G0 – Type IV (Dark Sky Compliant)

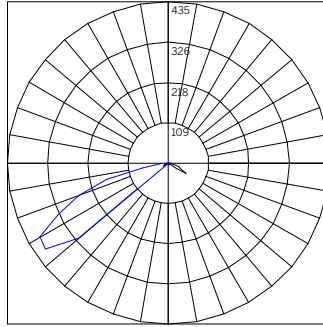


**ISOILLUMINANCE DIAGRAM - 11W 3000K**  
General Illumination<sup>1</sup>  
**JOE-BOGR-AE-20-9-ID-30-GE**

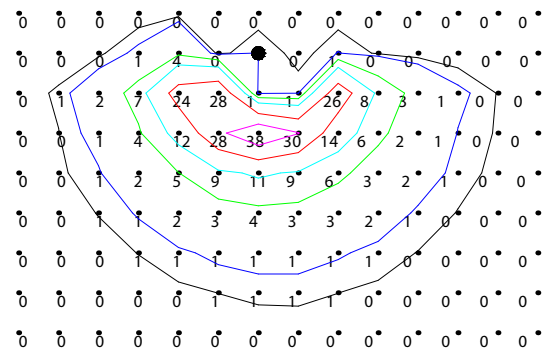


**JOE-BOGR-RE-...-GE...**  
Delivered Lumens - General Illumination

		Size [Wattage]	
		4 [11 ID]	20 [9 ID]
CCT	30-	514	514
	40-	545	545
		Polar Plot / Cone Of Light Multiplier	
		4 [11 ID]	20 [9 ID]
		1.00	1.00

**BUG Rating:** B1 U0 G1 – Type I (Dark Sky Compliant)

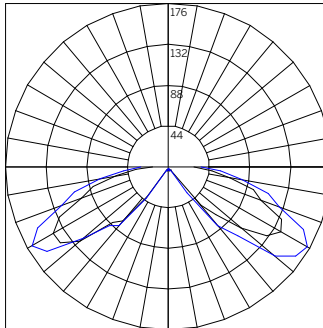

**ISOILLUMINANCE DIAGRAM - 11W 3000K**  
General Illumination<sup>1</sup>  
**JOE-BOGR-RE-20-9-ID-30-GE**

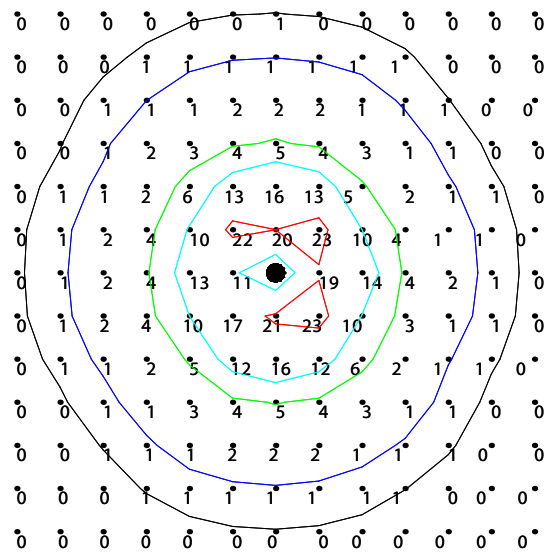

Value [Fc]	Color	Value [Fc]	Color
0.5	Black	20	Red
1	Blue	30	Magenta
5	Green	40	Dark Blue
10	Cyan	50	Dark Green

<sup>1</sup> Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.