Joe

inter•lux



General: Joe is a family of robust and elegant path markers and regular size bollards. The absence of any sharp corner makes it safe and suitable for even the most delicate applications (schools, public areas). Having both Asymmetric and Round distribution makes the range complete.

Fixture Body: Open pore Anodized and Powder Coated Die-Cast Aluminum. Diffuser: UV Resistant PMMA (Polymethylmethacrylate). Mounting: Open pore Anodized and Powder Coated Aluminum Base (Standard). Anchor Bolts and mounting pegs available upon request. Dimensions/Weight: 3.8" (2.65 lbs) - 19.7" (3.91 lbs)

Driver: Integral, 120-277V Dimmable 0-10V. Wattages: 11W (All Sizes). Cable: Fixture comes with 3.28' of power cable. **Safety features:** Fixture is equipped with Electrostatic discharge protection (4 KV), Surge Protection (0.5 KV) and Acquastop (anti-wicking).

IP rating: IP65 for protection against dust and moderate water jets from any angle. IK rating: IK 09

ETL Certification: ETL, wet location

Optics: Fixed, with Asymmetric or Round Emission. Color temperatures: 3000K - 4000K. CRI: 80+ BUG Rating: Asymmetric BO-UO-GO – Type IV (Dark Sky Compliant) / Round B1 U0 G1 – Type I (Dark Sky Compliant)

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°. Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.



AE 3.8" (11W)





RE 3.8" (11W)

RE 19.7" (11W)

| Delivered Lumens* | 3.8" | 19.7" | | |
|-------------------|------|-------|--|--|
| AE | 380 | 380 | | |
| RE | 514 | 514 | | |

*Values shown for 3000K

| Ordering Information | | | | | | | | | | |
|----------------------|--|---|------------------------|------------------------------------|--------------------------|------------------------------|---|-----------------------------|--|--|
| JOE | | | | 11 - ID | | GE | | | | |
| Product | Finish | Туре | Size | Wattage/Operation | Color Temp | Optic | + | Accessories ¹ | | |
| JOE = Joe | BOGR = Bollard, Gray BODB = Bollard, Dark Brown | AE = Asymmetric Emission RE = Round Emission | 4 = 3.8" 20 = 19.7" | 11 ID = 11W / Integral (0-10V Dim) | 30 = 3000K 40 = 4000K | GE = General Illumination | | Ground Peg E14931 (4) | | |
| | | | | | | | | Anchor Bolts E59950 (20) | | |

¹See page 2







ASYMMETRIC EMISSION

3.8" 11W ID





ROUND EMISSION

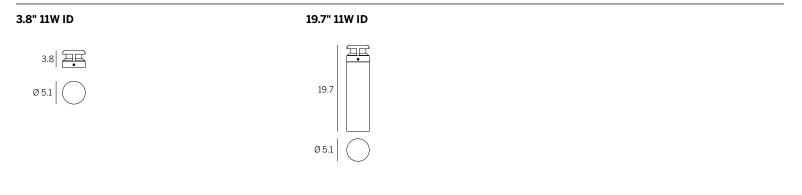

ACCESSORIES



E14931 Ground Peg for 3.8"



E59950 Anchor Bolts for 19.7"



410 381 1497 inter-lux.com answers@inter-lux.com Inter-lux reserves the right to make technical changes without notice.



inter-lux