



RYO-BOGR-AE-...-GE...			
Delivered Lumens - General Illumination			
		Size [Wattage]	
		9 [4 ID]	44 [20 ID]
CCT	30-	517	1019
	40-	535	1054
Polar Plot / Cone Of Light Multiplier			
		9 [4 ID]	44 [20 ID]
		0.51	1.00

BUG Rating: B1-U0-G1 – Type I Asymmetrical
(Dark Sky Compliant)

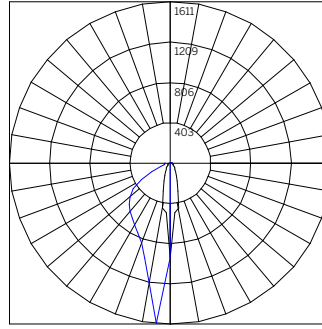


ISOILLUMINANCE DIAGRAM - 20W 3000K
General Illumination¹
RYO-BOGR-AE-44-20-ID-30-GE

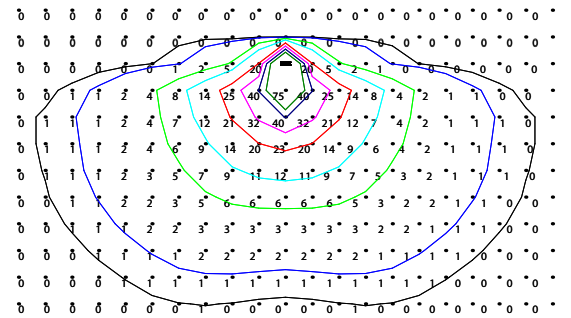


RYO-BOGR-RE-...-GE...			
Delivered Lumens - General Illumination			
		Size [Wattage]	
		9 [10 ID]	44 [20 ID]
CCT	30-	1034	2038
	40-	1070	2108
Polar Plot / Cone Of Light Multiplier			
		9 [10 ID]	44 [20 ID]
		0.51	1.00

BUG Rating: B1-U0-G1 – Type I Asymmetrical
(Dark Sky Compliant)

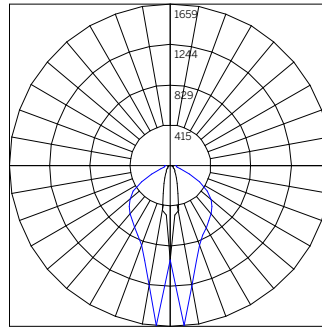

ISOILLUMINANCE DIAGRAM - 20W 3000K
General Illumination¹
RYO-BOGR-RE-44-20-ID-30-GE

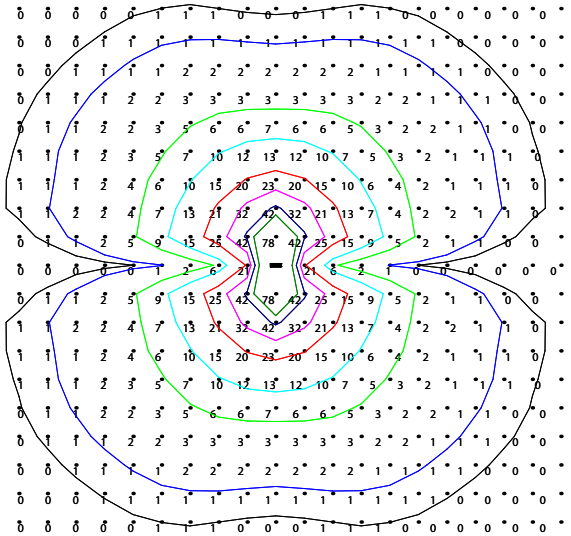

Value [Fc]	Color	Value [Fc]	Color
0.5	Black	20	Red
1	Blue	30	Magenta
5	Green	40	Dark Blue
10	Cyan	50	Dark Green

1 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.