



ANTON_QX 12W





FINISH	CODE	COLOUR LED	OPTIC
EMBOSSED BLACK	E97443	5000K - C	
		4000K - N	
		3000K - W	30° - 30
		AMBER - Y	60° - 60
		BLUE - B	120° - 12
		GREEN - G	
		RED - R	



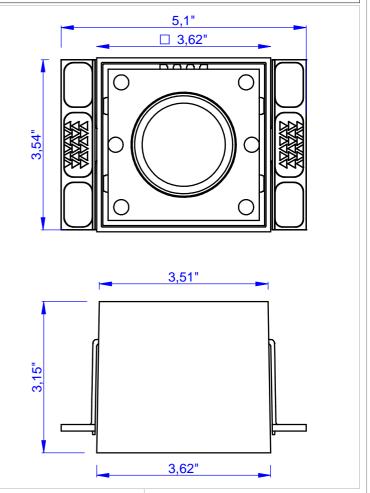

Product Descrption

Recessed square spot with power LED. Aluminum body, available in powder coated black. Flush installation on dry wall. Suitable for interior decoration, applicable on walls, ceilings and furniture. Power supply remote.

LED White: 5000K - 4000K - 3000K

Color LED:

Blue, Amber, Red, Green

Optic:

30°-60°-120°

LED RGB:

Optic:

Applications

Indoor Spotlight

Power Led:

LED XPG2 CREE - CRI80

Resin: No

Cable type included: Yes, 11,8" 2X22AWG red/blue cables Connector type: -Input (mA): 630 mA

Nominal power (W): 12W Real power (W): Nominal Power Temperature on the surface of the glass: 40°C

Adjustability: No Drive over. No

Glow Wire: 850°

Power supply: Remote Insulation class: Class 2

IP 40

Weigh: 1,32 Lbs Volume: 122"³

F : OK . OK

Luminous flux


		Nominal Lumen*			Nominal
Type LED	n°led	5000K - C	4000K - N	3000K - W	Power
XPG2	6	1596	1494	1398	12W

*Value of the luminous flux from the LED data sheet.



ANTON_QX 12W



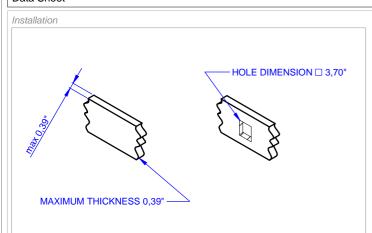

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

READ ALL OF THESE INSTRUCTIONS BEFORE INSTALLING FIXTURES

- · Keep all of the instructions for future reference
- Turn off power before installing fixture
- Installation is to be performed by a qualified electrician only
- All installations must conform to the National Electrical Code as well as all local jurisdictional codes and regulations
- Any modification of the luminaire will void any and all written or implied warranties
- The manufacture accepts no responsibility for damage to persons or property airing through improper use or installation

Accessories					
Accessory (1)	Accessory (2)	Accessory (3)			
Accessory (1)					
Accessory (2)					
Accessory (3)					
Accessory (4)					