
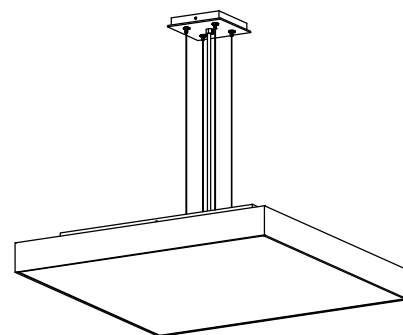


# Step


## TECHNICAL SHEET

### Canopy finish:

- Canopy finish matches housing
- For Clear Anodized Aluminum housing, canopy finish will be Painted Anodized Aluminum

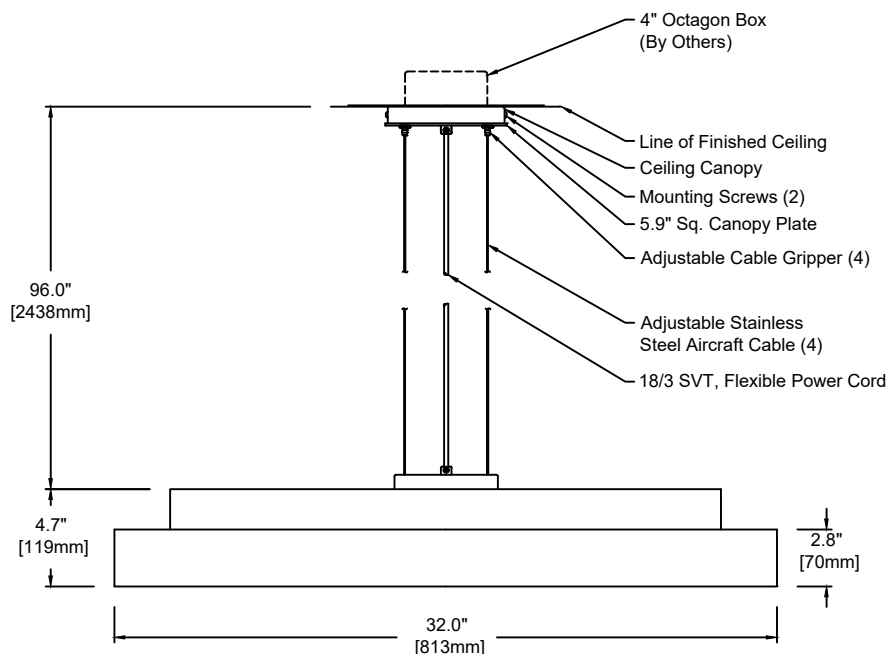

**PERSPECTIVE VIEW**

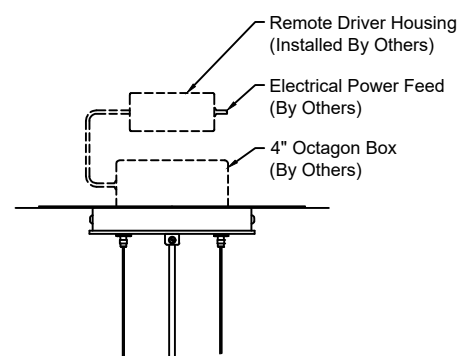


**Remote Driver Detail:**

Scale: N.T.S.

### Note - Remote Driver:

L3D0E - Lutron Hi-Lume  
Premier 0.1% EcoSystem - Only

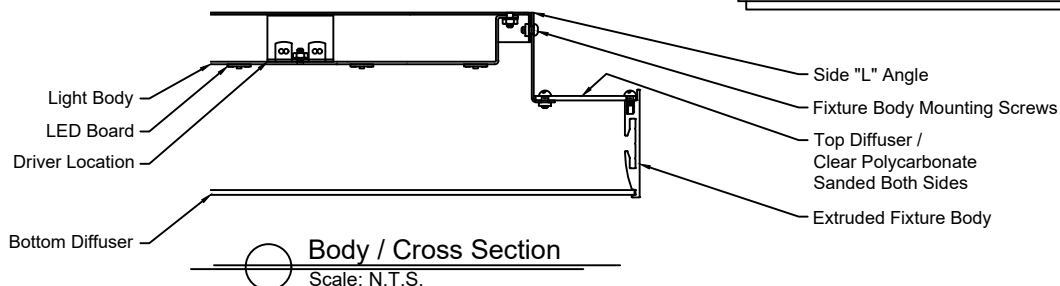

**Fixture Weight : 27 lbs**

1540	P	32	L	830	U	S	SW	16	CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
Wattage and Control	P - Pendant	32"	L	827 - 2,700K	1 - 120 VAC only	S	SW - Satin Opal Acrylic	16 - Clear Anodized Aluminum	CC - Clear Insulated
				830 - 3,000K	U - 120/277 V	D010		21 - Painted White - RAL 9010 Matte	Cable (Standard)
				835 - 3,500K		DFPN		22 - Painted Custom Color	WC - White Cable
				840 - 4,000K		L3DAE			BC - Black Cable
						L3D0E			

### Wattage and Control

Control (Integral):  
S - Non-Dim  
D010 - 0-10V 10%  
DFPN - Lutron Forward Phase 1%, 120VAC  
L3DAE - Lutron Hi-Lume 1% EcoSystem

Wattage "L" - 54 Watt  
2,700K - 7,200 lm  
3,000K - 7,200 lm  
3,500K - 7,488 lm  
4,000K - 7,632 lm

Technical Data:  
Form - linear, Operating voltage: 24VDC  
Color rendering index Ra min: 82 CRI, Available in 90 CRI  
Viewing angle: 110°  
Lifetime - L70: 60,000h  
Working temperature: -20°C to 60°C (-4°F to 140°F)

Remote Driver:  
Max. wiring distance / Load  
Lutron  
Wire Gauge  
#18AWG 25'  
#16AWG 40'  
#14AWG 60'

Control (Remote 24V):  
L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem

**inter•lux**

inter-lux.com

All specifications subject to change without notice © 2019

almlighting.com

