

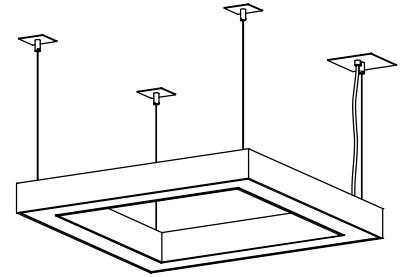
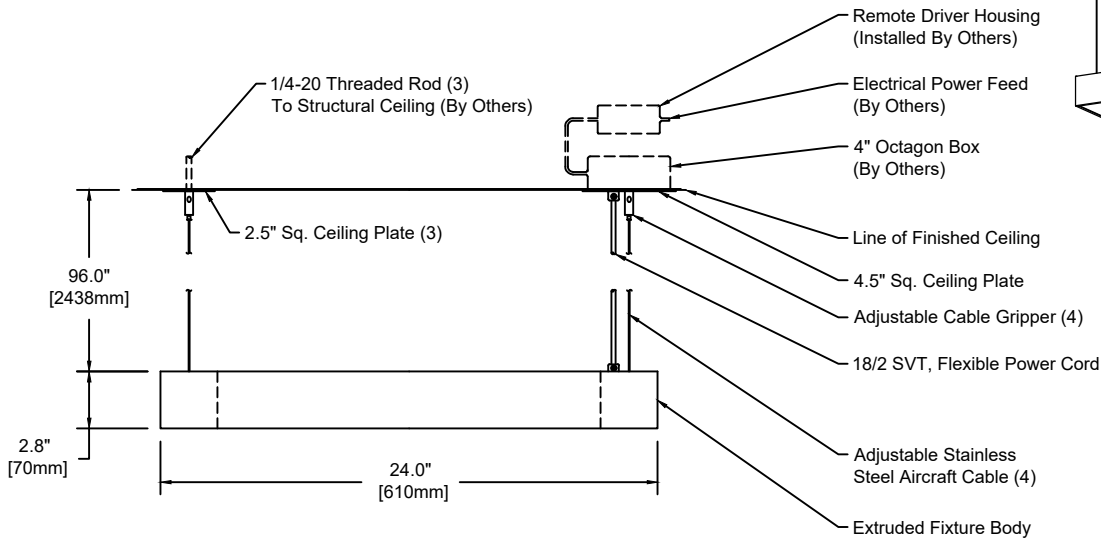


## TECHNICAL SHEET

# Frame

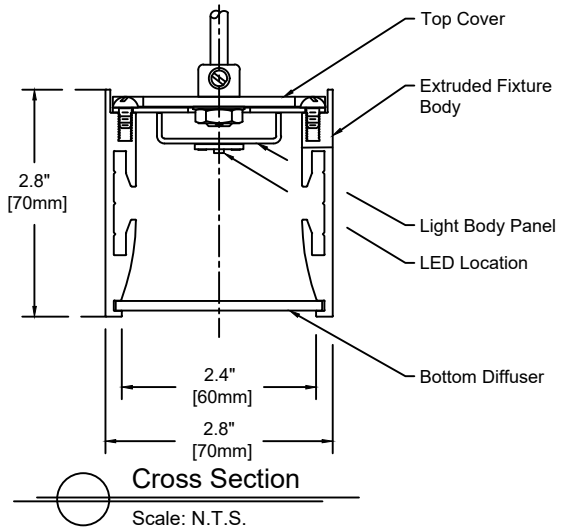

**PERSPECTIVE VIEW**

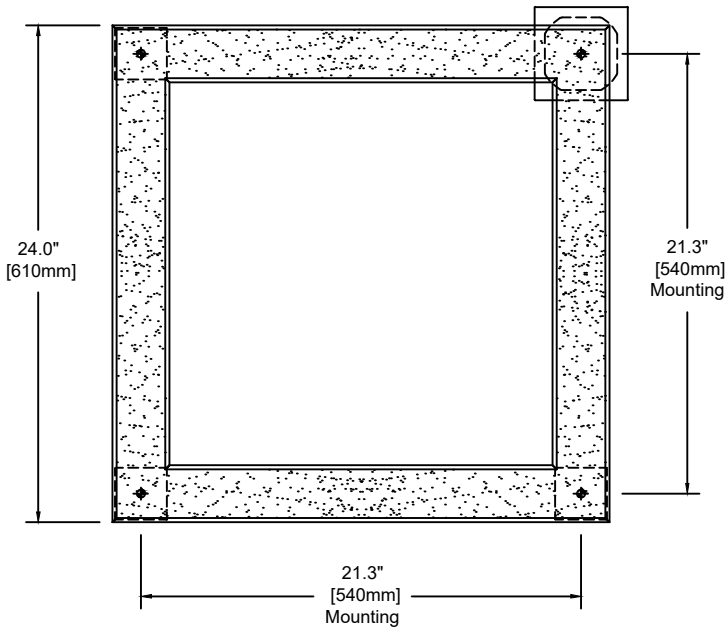

Drawing 1 of 2

Fixture Weight : 14 lbs

1545	P	24	M	830	U	S	SW	16	SC - CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
<div><div>P - Pendant</div><div>24"</div><div>L M</div><div>827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K</div><div>1 - 120 VAC only U - 120/277 V</div><div>S D010 DFPN L3DAE L3D0E</div><div>SW - Satin Opal Acrylic</div><div>16 - Clear Anodized Aluminum 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color</div><div>SC - Straight Cables CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable</div></div>									

### Wattage and Control

Control (Remote 24V):  
S - Non-Dim  
D010 - 0-10V 10%  
DFPN - Lutron Forward Phase 1%, 120VAC  
L3DAE - Lutron Hi-Lume 1% EcoSystem  
L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "L" - 20 Watt  
2,700K - 2,666 lm  
3,000K - 2,666 lm  
3,500K - 2,773 lm  
4,000K - 2,826 lm

Wattage "M" - 40 Watt  
2,700K - 4,952 lm  
3,000K - 4,952 lm  
3,500K - 5,160 lm  
4,000K - 5,260 lm

Technical Data:  
Form - linear, Operating voltage: 24VDC  
Color rendering index Ra min: 82 CRI, Available in 90 CRI  
Viewing angle: 110°  
Lifetime - L70: 60,000h  
Working temperature: -20°C to 60°C (-4°F to 140°F)

Remote Drivers:  
Max. wiring distance / Load

Wire Gauge	≤48W	Osram ≤72W	≤96W	Lutron ≤40W	≤96W
#18AWG	37'	25'	18'	15'	25'
#16AWG	59'	39'	29'	25'	40'
#14AWG	95'	63'	47'	40'	60'


**inter•lux**

inter-lux.com

All specifications subject to change without notice © 2019



almlighting.com







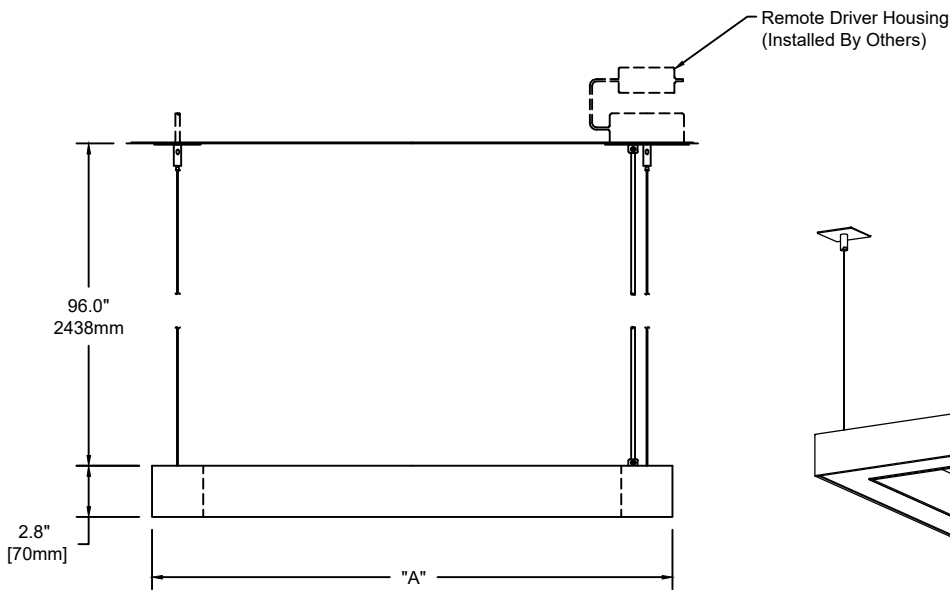
# Frame

## TECHNICAL SHEET

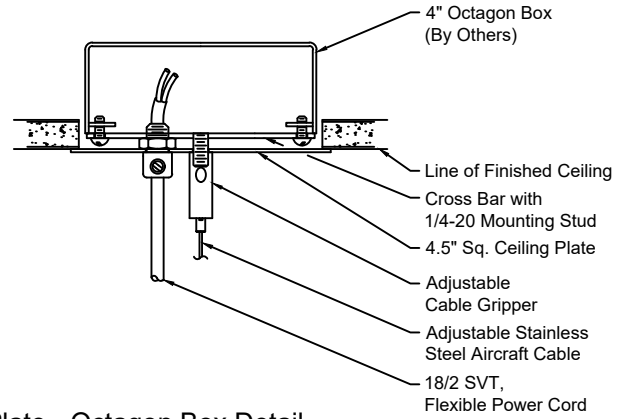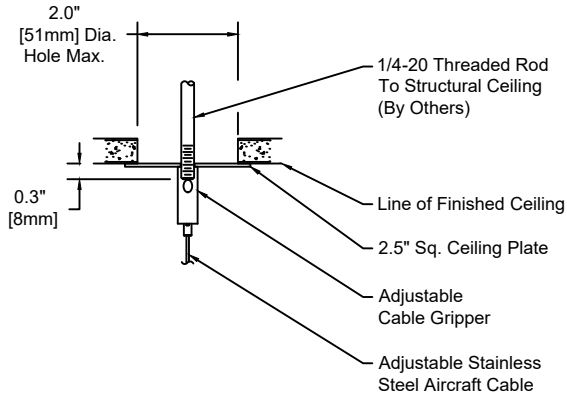


 Ceiling Plate Detail Typ. (3)  
Scale: N.T.S.

 Ceiling Plate - Octagon Box Detail  
Scale: N.T.S.



Ceiling Plate finish:  
- Ceiling Plate finish matches housing  
- For Clear Anodized Aluminum housing, ceiling plate finish will be Painted Anodized Aluminum

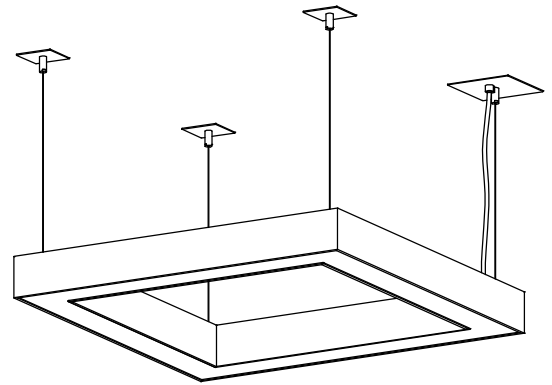

Straight Cables - Mounting

Drawing 2 of 2

Series: 1545

Remote Drivers: Max. wiring distance / Load					
Wire Gauge	Osram			Lutron	
	≤48W	≤72W	≤96W	≤40W	≤96W
#18AWG	37'	25'	18'	15'	25'
#16AWG	59'	39'	29'	25'	40'
#14AWG	95'	63'	47'	40'	60'

inter•lux

inter-lux.com

All specifications subject to change without notice © 2019

almlighting.com

