


TECHNICAL SHEET

Stick MT

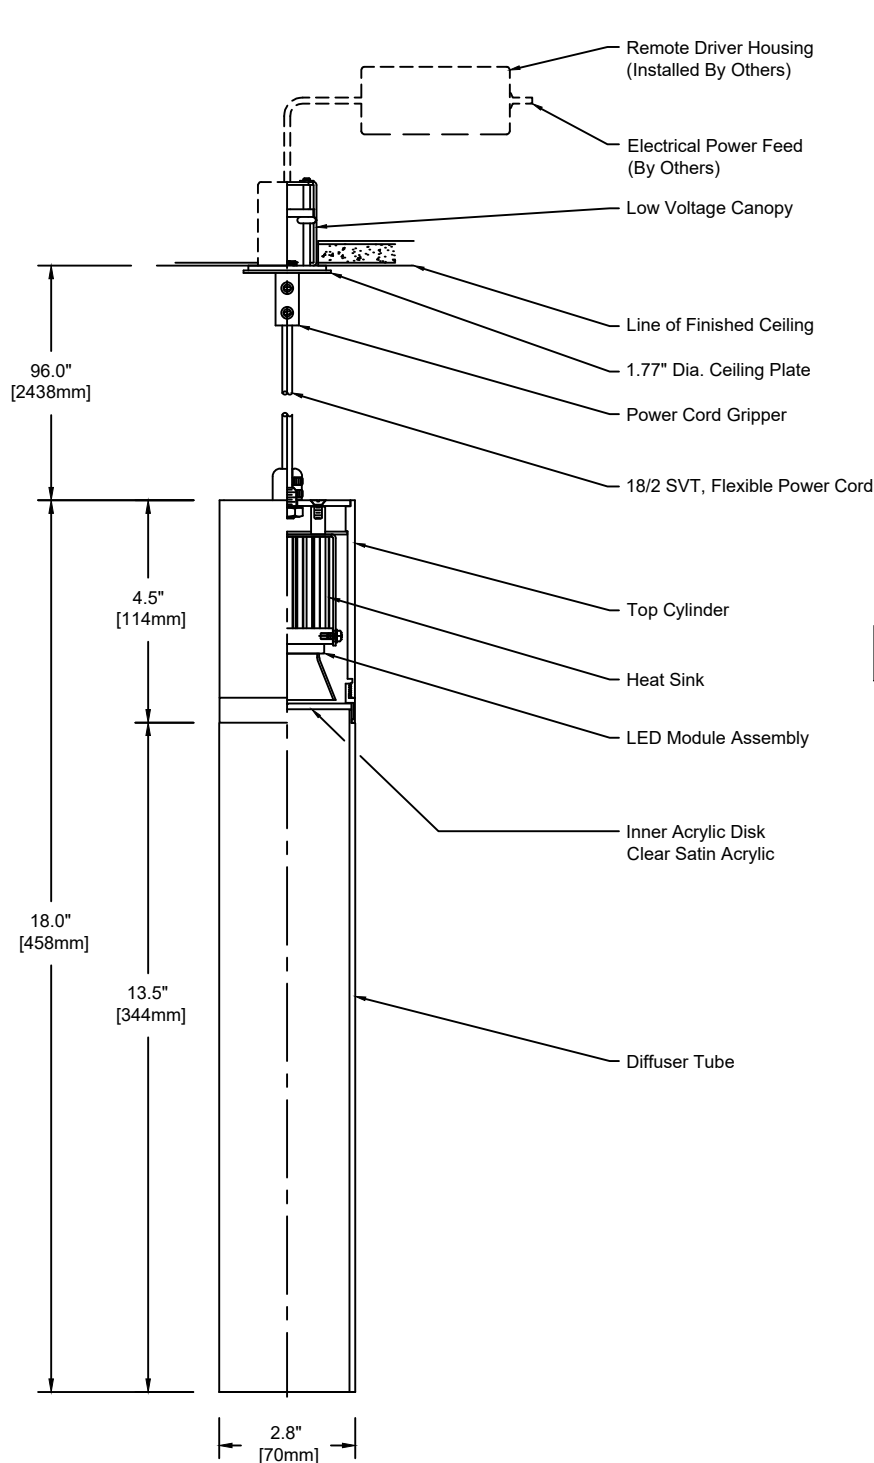

PERSPECTIVE VIEW

Note:
Canopy finish matches housing

Fixture Weight :5 lbs

1592	P	18	H	830	U	S	SA	21	MT - CC	
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options	
P - Pendant			18"	M	827 - 2,700K	1 - 120 VAC only	S	SA - Satin Clear Acrylic	21 - Painted White - RAL 9010 Matte	MT - Metal Top
				H	830 - 3,000K	U - 120/277 V	D010		29 - Anodized Aluminum - Titan	CC - Clear Insulated
					835 - 3,500K		EC030W		22 - Painted Custom Color	Cable (Standard)
					840 - 4,000K		DFPN			WC - White Cable
							PEQ1			BC - Black Cable
							PEQ0			
Wattage and Control										

Wattage and Control

Control (Constant Current, Remote):
S - Non-Dim
D010 - 0-10V 10%
ECO30W - EldoLED 0-10V 1%
DFPN - Lutron Forward Phase 1%, 120VAC
PEQ1 - Lutron Hi-Lume 1% EcoSystem
PEQ0 - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "M" - 8.4 Watt / 1,311 lm
Wattage "H" - 12.6 Watt / 1,710 lm

Technical Data:
Color rendering index Ra min: 80 CRI, Available in 90 CRI
Reflector angle: 15°

Power and Voltage:
8.4 Watt / 18V / 500mA
12.6 Watt / 18V / 700mA

Remote Drivers:
Max. wiring distance / Load

Wire Gauge	Hatch	Lutron	EldoLED
#18AWG	50'	30'	72'
#16AWG	80'	35'	118'
#14AWG	126'	50'	150'

inter•lux

