


TECHNICAL SHEET

Stick MT

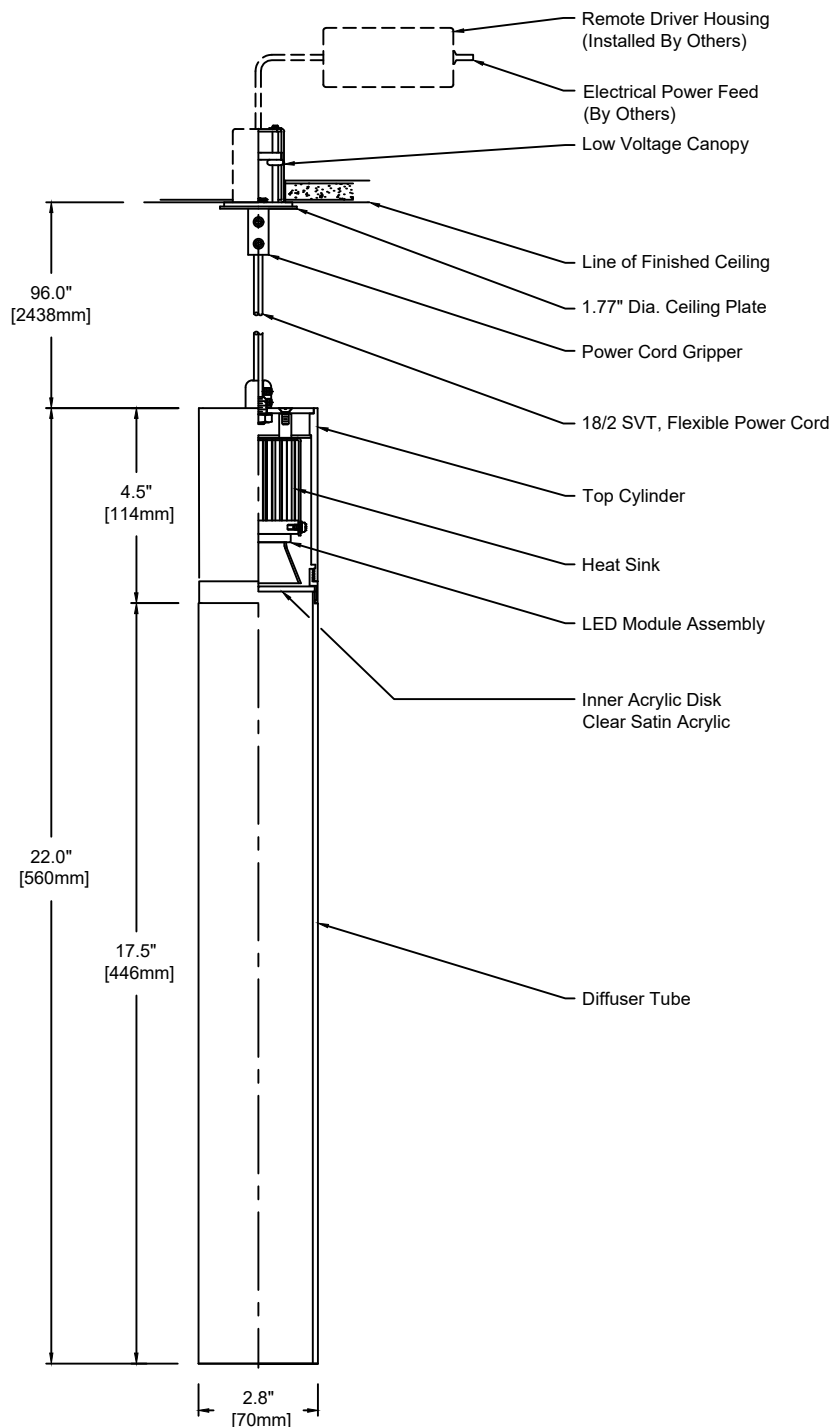

PERSPECTIVE VIEW

Note:
Canopy finish matches housing

Fixture Weight :6 lbs

1592	P	22	H	830	U	S	SA	21	MT - CC	
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options	
P - Pendant			22"	M	827 - 2,700K	1 - 120 VAC only	S	SA - Satin Clear Acrylic	21 - Painted White - RAL 9010 Matte	MT - Metal Top
				H	830 - 3,000K	U - 120/277 V	D010		29 - Anodized Aluminum - Titan	CC - Clear Insulated
					835 - 3,500K		EC030W		22 - Painted Custom Color	Cable (Standard)
					840 - 4,000K		DFPN			WC - White Cable
							PEQ1			BC - Black Cable
							PEQ0			
Wattage and Control										
Control (Constant Current, Remote):				Wattage "M" - 8.4 Watt / 1,311 lm				Remote Drivers:		
S - Non-Dim				Wattage "H" - 12.6 Watt / 1,710 lm				Max. wiring distance / Load		
D010 - 0-10V 10%								Wire Gauge		
ECO30W - EldoLED 0-10V 1%								Hatch		
DFPN - Lutron Forward Phase 1%, 120VAC								Lutron		
PEQ1 - Lutron Hi-Lume 1% EcoSystem								EldoLED		
PEQ0 - Lutron Hi-Lume Premier 0.1% EcoSystem										
				Technical Data:						
				Color rendering index Ra min: 80 CRI, Available in 90 CRI						
				Reflector angle: 15°						
				Power and Voltage:						
				8.4 Watt / 18V / 500mA						
				12.6 Watt / 18V / 700mA						
inter•lux								CE		
								ETL LISTED		
inter-lux.com				All specifications subject to change without notice © 2019				almlighting.com		

inter•lux

inter-lux.com

All specifications subject to change without notice © 2019

almlighting.com

