


TECHNICAL SHEET

City - Outdoor

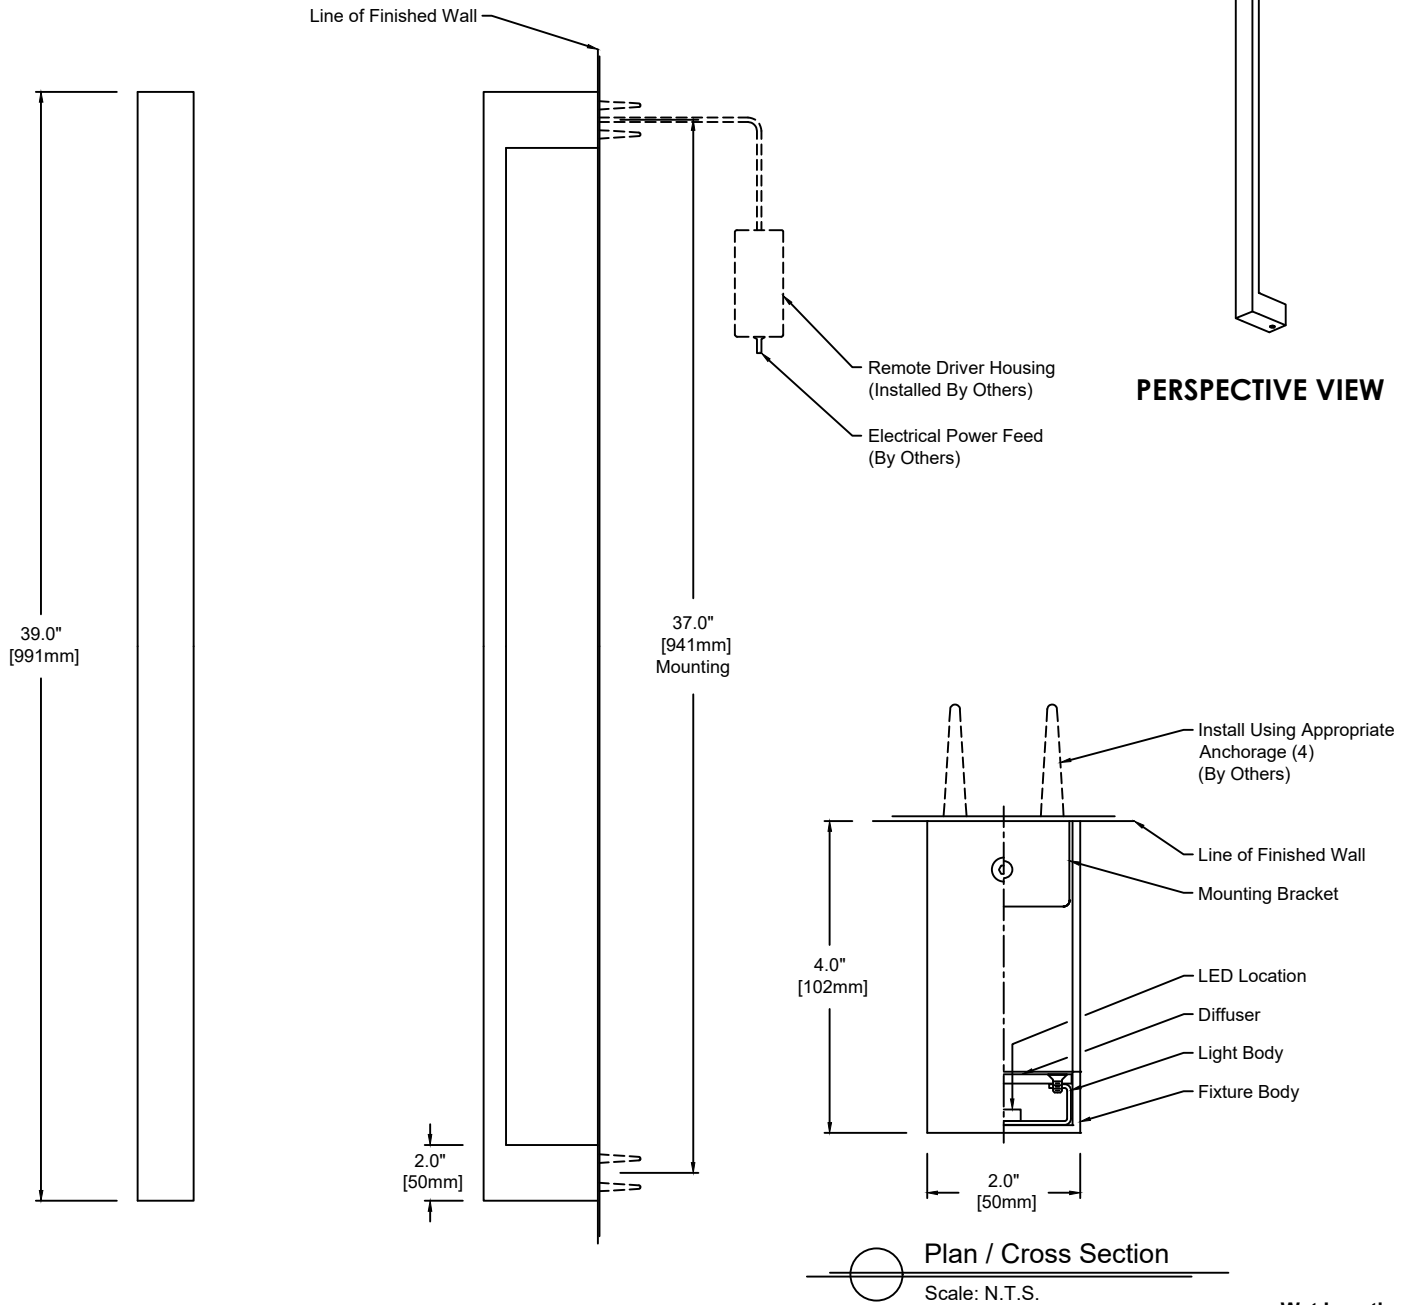

Wet Location
Fixture Weight : 3 lbs

1825WL	W	39	L	830	U	S	SA	19																		
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish																		
<div>W - Wall39"L830 - 3,000K835 - 3,500K840 - 4,000K1 - 120 VAC onlyU - 120/277 VS D010DFPNL3DAEL3D0ESA - Satin Clear Acrylic19 - Painted Anodized Aluminum - RAL 9006 Matte21 - Painted White - RAL 9010 Matte26 - Painted Black - RAL 9005 Matte22 - Painted Custom Color</div>																										
Wattage and Control																										
<div>Control (Remote 24V):S - Non-DimD010 - 0-10V 10%DFPN - Lutron Forward Phase 1%, 120VACL3DAE - Lutron Hi-Lume 1% EcoSystemL3D0E - Lutron Hi-Lume Premier 0.1% EcoSystemWattage "L" - 14 Watt3,000K - 1,125 lm3,500K - 1,215 lm4,000K - 1,260 lmTechnical Data:Form - linear (tape), Operating voltage: 24VDCColor rendering index Ra min: 80 CRIViewing angle: 120°Lifetime - L70: 50,000hIP67 rated for outdoor useWorking temperature: -20°C to 50°C (-4°F to 122°F)Remote Drivers:Max. wiring distance / Load</div> <table><thead><tr><th></th><th>Osram</th><th>Lutron</th></tr><tr><th></th><th>≤72W</th><th>≤96W</th></tr></thead><tbody><tr><td>Wire Gauge</td><td>≤48W</td><td>≤40W</td></tr><tr><td>#18AWG</td><td>37' 25'</td><td>18' 15'</td></tr><tr><td>#16AWG</td><td>59' 39'</td><td>29' 25'</td></tr><tr><td>#14AWG</td><td>95' 63'</td><td>47' 40'</td></tr></tbody></table>										Osram	Lutron		≤72W	≤96W	Wire Gauge	≤48W	≤40W	#18AWG	37' 25'	18' 15'	#16AWG	59' 39'	29' 25'	#14AWG	95' 63'	47' 40'
	Osram	Lutron																								
	≤72W	≤96W																								
Wire Gauge	≤48W	≤40W																								
#18AWG	37' 25'	18' 15'																								
#16AWG	59' 39'	29' 25'																								
#14AWG	95' 63'	47' 40'																								

inter•lux

