

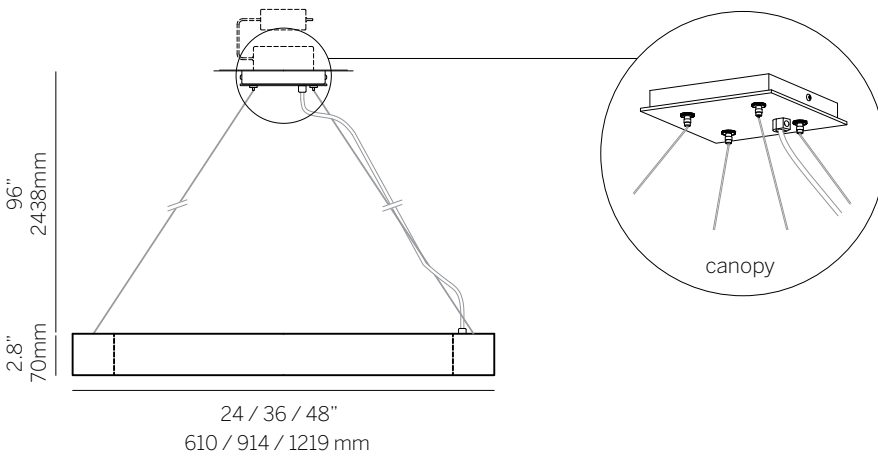



Frame

In various sizes, direct or indirect illumination, Frame is suitable for individual workspace task lighting, conference rooms or larger spaces when used in multiple configurations. Extruded aluminum construction allows the flexibility to alter the dimensions easily and economically.

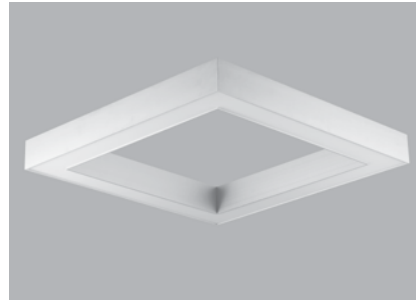

Center Canopy (standard)
(suspension varies with fixture size please confirm with factory)

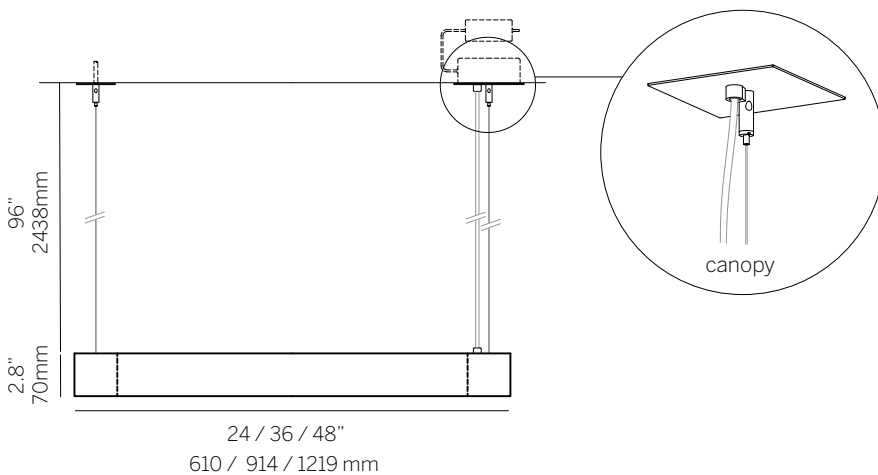

Straight Cables

Model 1545 **1545**

Type _____

P Pendant
S Surface

Size _____

24 24"
36 36"
48 48"
Custom

Wattage¹ _____

24"
L 20W (2666lm)
M 40W (4952lm)
36"
L 32W (4267lm)
M 64W (7925lm)
48"
L 44W (5867lm)
M 88W (10897lm)

Color Temp² _____

827 2700
830 3000
835 3500
840 4000

Voltage _____

U 120/277
I 120VAC only

Control (Remote 24V) _____

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1%
120VAC
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1%
EcoSystem

Diffuser _____

SW Satin opal acrylic **SW**

Finish³ _____

16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
22 Painted custom color

Options _____

CE Center canopy
SC Straight cables
CC Clear insulated cable (standard)⁴
WC White cable
BC Black cable

Notes

¹Nominal lumens

²82 CRI standard / 90 CRI available

³Canopy finish matches housing

⁴96" clear insulated cable standard

For up to date technical information, refer to inter-lux.com/alm

