

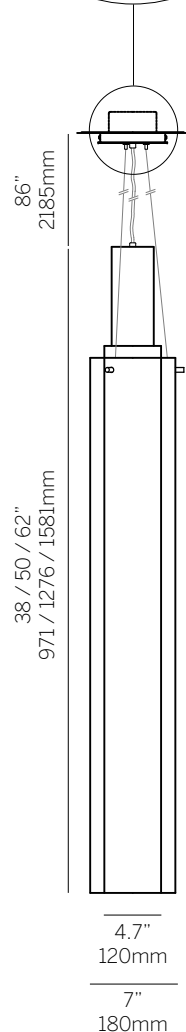


Gran Fuse


A suspended luminaire for large scale spaces, the Gran Fuse has multiple performance options and a classic form.



Standard

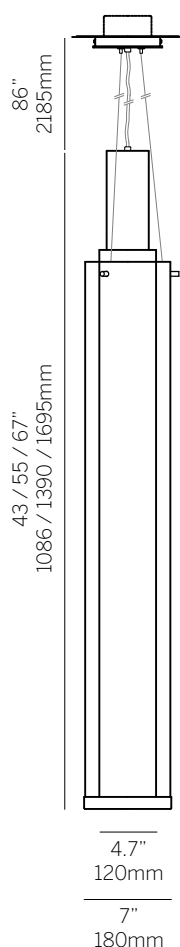

Flush downlight

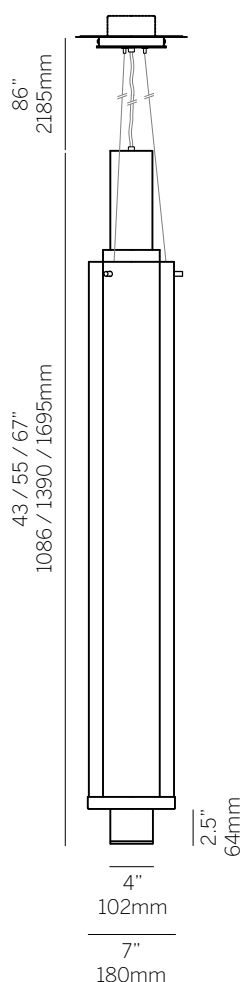

Cylinder downlight

Notes

¹Nominal lumens

²82 CRI standard / 90 CRI available

³Canopy finish matches housing

⁴96" clear insulated cable standard



For up to date technical information, refer to inter-lux.com/alm

inter•lux

Model 1575

1575

Type

P Pendant

P

Size

38 38"
43 43"
50 50"
55 55"
62 62"
67 67"

Custom (up to 74" standard, 79" downlight)

Wattage¹

General Light

38 / 43"

L 24W (3200lm)

50 / 55"

L 36W (4800lm)

62 / 67"

L 48W (6400lm)

Downlight

M 8.4W (1,311lm) @ 500 mA

H 12.6W (1710lm) @ 700mA

Color Temp²

827 2700

830 3000

835 3500

840 4000

RGB

RGBW

Voltage

U 120/277

I 120VAC only

Control (General / 24V)

S Non-dim (Integral)

D010 0-10V 10% (Integral)

DFPN Lutron Forward Phase 1% 120VAC (Remote)

L3DAE Lutron Hi-lume 1% EcoSystem (Remote)

L3D0E Lutron Hi-lume Premier 0.1% EcoSystem (Remote)

Control (Downlight / Constant Current)

S Non-dim (Integral)

D010 0-10V 10% (Integral)

ECO30W EidoLED 0-10V 1% (Remote)

DFPN Lutron Forward Phase 1% 120VAC (Remote)

PEQ1 Lutron Hi-lume 1% EcoSystem (Integral)

PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (Integral)

Diffuser

AA Clear acrylic

SW Satin opal acrylic

AA

SW

Finish³

12 Satin nickel

19 Painted anodized aluminum - RAL 9006 Matte

21 Painted white - RAL 9010 matte

22 Painted custom color

Options

D Flush downlight

CL Extended cylinder light

CC Clear insulated cable (standard)⁴

WC White cable

BC Black cable



inter-lux.com/alm