
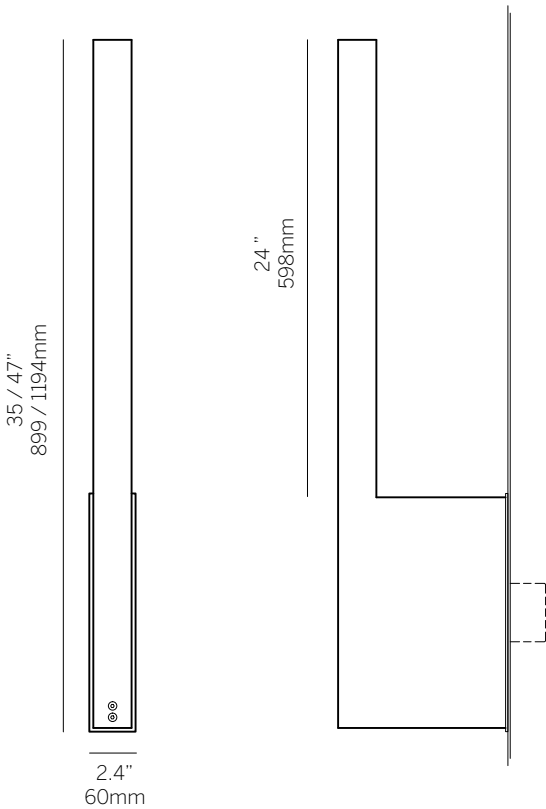


# Nordik

Classic wall bracket available in multiple sizes provides glare-free general and accent illumination to any space. Available indoor and outdoor, in multiple finishes.

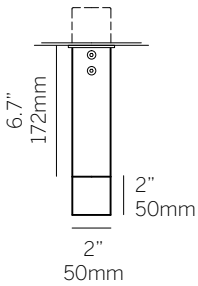

### Notes

- <sup>1</sup> Suitable for wet location
- <sup>2</sup> Nominal lumens
- <sup>3</sup> 82 CRI standard / 90 CRI available

For up to date technical information, refer to [inter-lux.com/alm](http://inter-lux.com/alm)

# inter•lux

**Model 2549<sup>1</sup>** **2549**

**Type**  
W Wall **W**

**Size**  
35 35" \_\_\_\_\_  
47 47" \_\_\_\_\_  
Custom \_\_\_\_\_

**Wattage<sup>2</sup>** \_\_\_\_\_  
35"  
L 6W (800lm)  
M 12W (1486lm)  
H 20W (2348lm)  
47"  
L 9W (1200lm)  
M 18W (2229lm)  
H 30W (3522lm)

**Color Temp<sup>3</sup>** \_\_\_\_\_  
827 2700  
830 3000  
835 3500  
840 4000

**Voltage** \_\_\_\_\_  
U 120/277  
I 120VAC only

**Control (24V)** \_\_\_\_\_  
S Non-dim (Integral)  
D010 0-10V 10% (Integral)  
DFPN Lutron Forward Phase 1%  
120VAC (Integral)  
L3DAE Lutron Hi-lume 1% EcoSystem  
(Integral)  
L3DOE Lutron Hi-lume Premier 0.1%  
EcoSystem (Remote)

**Diffuser**  
SW Satin opal acrylic **SW**

**Finish** \_\_\_\_\_  
19 Painted anodized aluminum -  
RAL 9006 Matte  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color



[inter-lux.com/alm](http://inter-lux.com/alm)