



DIR-...-S-...-4-X-...-GE			
Delivered Lumens - General Illumination			
CCT	Delivered Lumens Per Foot		
	LPMGR (Gray)	LPMBG (Black Gray)	LPMDB (Dark Brown)
30-	157	117	115
40-	162	121	118

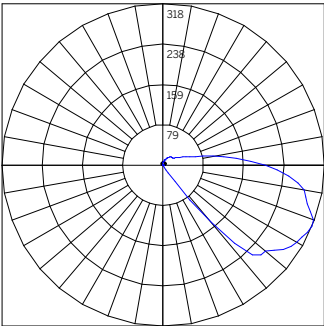


ISOILLUMINANCE DIAGRAM - 4W 3000K General Illumination Single Fixture¹
DIR-LPMGR-S-40-4-X-30-GE

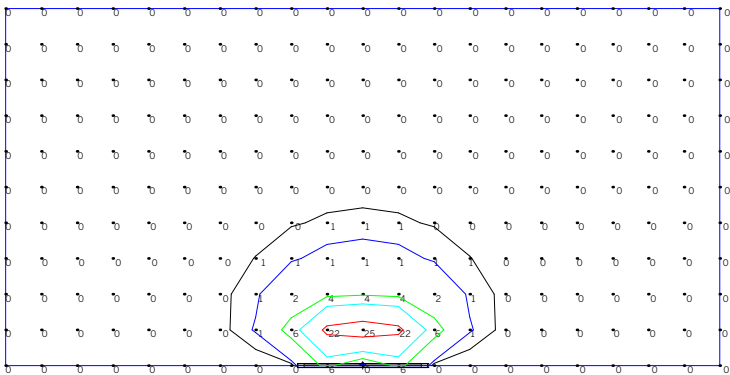

Value [Fc]	Color	Value [Fc]	Color
0.5	Black	20	Red
1	Blue	30	Magenta
5	Green	40	Dark Blue
10	Cyan	50	Dark Green

ISOILLUMINANCE DIAGRAM - 4W 3000K General Illumination Continuous Run¹
DIR-LPMGR-S-RUN-4-X-30-GE

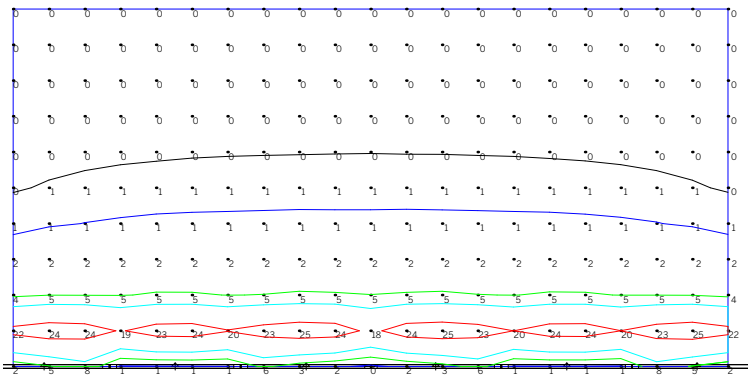

¹ Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.