

LL-DIR-LPMGR-...-GE

Delivered Lumens - General Illumination

		POWER		
		XL [1.5 W/ft]	L [3 W/ft]	M [6.5 W/ft]
CCT	927	176	344	737
	930	185	363	778
	935	185	363	778
	940	193	379	811
	AM	-	-	113

BUG RATING


	B0	U3	G2
--	----	----	----

Power Multiplier


	XL [1.5 W/ft]	L [3 W/ft]	M [6.5 W/ft]
	0.24	0.47	1.00

CCT Multiplier

	927	930	935	940	AM
	0.95	1.00	1.00	1.04	0.14

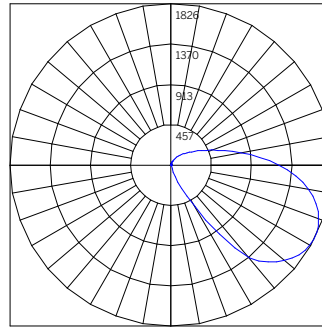

**ISOILLUMINANCE - 48" GE 6.5W/FT 3000K
LL-DIR-LPMGR-S-RUN-65-X-30-GE***

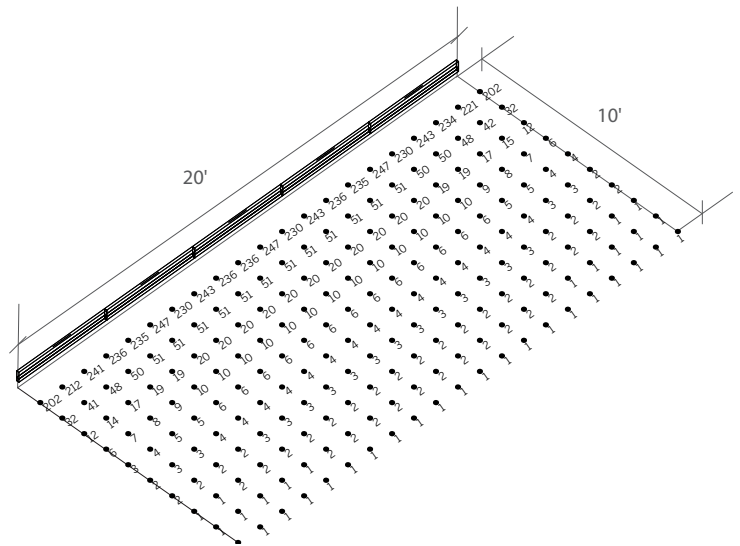

*Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.