
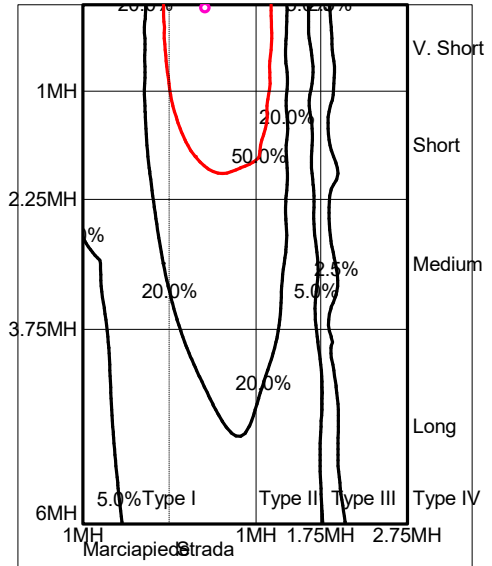


<b>Luminaire</b>		<b>Measur.</b>		<b>Source</b>	
Code	64590W00	Code	RF_181105_04_5+	Code	LED-STP047-BC
Name	Dirigo_FL1 Steel / Linear profiles / Steel	Name	Dirigo_FL1 Steel / Linear profiles / Steel	Number	1
Line	Eulumdat	Date	05-11-2018	Position	
Luminaire Flux	539 lm	Luminaire Power	18.0 W	Efficacy	29.944 lm/W
Source Flux	539 lm	Maximum value	616.51 cd/klm	Position	C=85.00 G=22.50
				Efficiency	100.00%
				CG	Sym. on planes 270-90

US ROAD STANDARDS

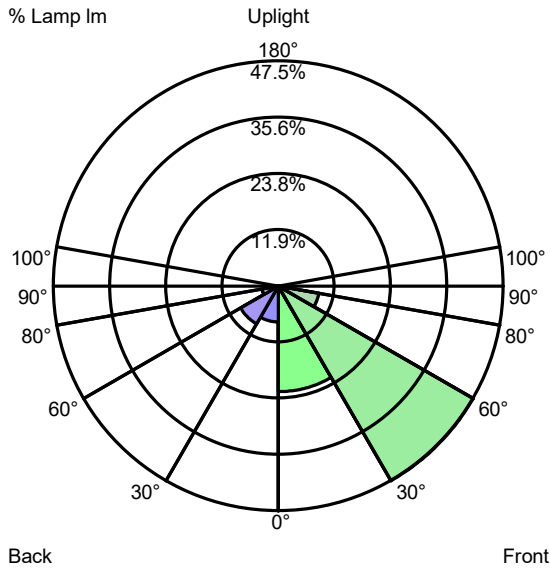

Luminaire Classification System (LCS)			
LCS Zone		Lumens	%Lamp
FL	0° -- 30°	120.3 lm	22.3 %
FM	30° -- 60°	256.2 lm	47.5 %
FH	60° -- 80°	46.8 lm	8.7 %
FVH	80° -- 90°	2.2 lm	0.4 %
BL	0° -- 30°	41.0 lm	7.6 %
BM	30° -- 60°	49.8 lm	9.2 %
BH	60° -- 80°	19.1 lm	3.5 %
BVH	80° -- 90°	3.7 lm	0.7 %
UL	90° -- 100°	0.0 lm	0.0 %
UH	100° -- 180°	0.0 lm	0.0 %
TOTALS		539.0 lm	100.0 %
		BUG B0 U0 G0	Type II Very Short Asymmetrical