




AVVENI PENDANT 1



Product-information: Aluminum housing. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees).
Design: Ulrich Sattler | Michael Schmidt, Code2design

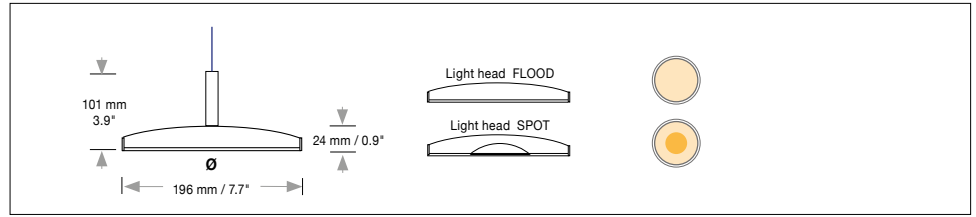

STRUCTURE

Type	Ø / H mm	Ø / H inches	LED Watt	weight kg ² / lbs ²	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
	Ø 196 / 101 mm	Ø 7.7 / 0.9"	12.5 W	0.8 / 1.7	1211.00.	XX.	XX.	XX.	XX.
Dimmer	0 - 10 V			Standard	XXXX.	XX.	05	XX.	XX.
Power Supply Cable	Z 82, black 78.7" (2000mm)				XXXX.	XX.	XX.	82	XX.
Mounting Version	R Standard				XXXX.	XX.	XX.	XX.	0X.


1211.00. . . 820X

Order No. STRUCTURE

Suspension with 1 power supply cable 78.7" (2000mm) and cavity ceiling box, power supply in suspended ceiling

LIGHT HEAD

Type	Finish Light head outside ring	Finish Light head top cover and cable fixation	LED	Beam Angle	LIGHT HEAD						
					Type No.	Finish 2	Finish 3	LED Kelvin	Beam angle		
					02.	XX.	XX.	XX	XX	XX	XX
	62 (14) black matte				XX.	62	XX.	XX	XX	XX	XX
		62 black anodized			XX.	XX.	62.	XX	XX	XX	XX
			Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K		XX.	XX	XX.	27	XX	XX	XX
					XX.	XX	XX.	30	XX	XX	XX
					XX.	XX	XX.	40	XX	XX	XX
				FLOOD 12.5 W 1282 ¹ Lumen SPOT 26° 12.5 W 1229 ¹ Lumen SPOT 34° 12.5 W 1229 ¹ Lumen	XX.	XX	XX.	XX	99	00	00
					XX.	XX	XX.	XX	26	00	00
					XX.	XX	XX.	XX	34	00	00



Quantity Order No. LIGHT HEAD FLOOD **02. . . 62. . . . 00 00**

Quantity Order No. LIGHT HEAD SPOT **02. . . 62. . . . 00 00**

Input voltage for all external power supply units and canopies is 120-277V
 Remote OT96-D010 driver ordered separately (13.25" (L) x 5" (W) x 2.25" (H))



Light distribution direct



Conforms to UL-STD 1598
 Certified to CSA-STD C22.2
 No.250.0-08