


CIRCOLO

L-Version

Housing: Aluminum profile with L-shaped diffuser
 Design: SATTLER, Patented

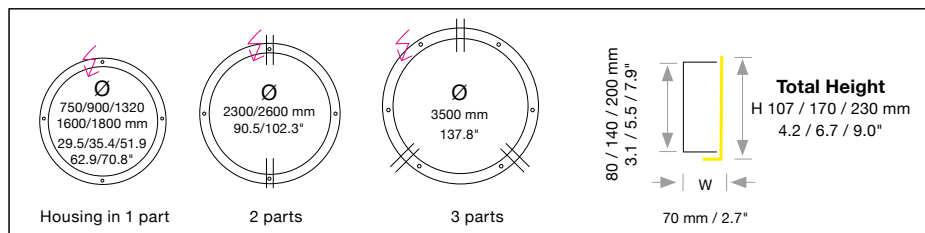

Size: Ø x H x W mm	Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Total height	Mounting version	
Ø 750 / 29.5"	H 107 / 4.2"	W 70 / 2.7"	48	3381	8 / 17.6	228.	X X.	X X.	X X.	X X.	X X X.	107	X
Ø 900 / 35.5"	H 107 / 4.2"	W 70 / 2.7"	57	4091	10 / 22.0	229.	X X.	X X.	X X.	X X.	X X X.	107	X
Ø 1320 / 51.9"	H 107 / 4.2"	W 70 / 2.7"	83	6115	20 / 44.0	230.	X X.	X X.	X X.	X X.	X X X.	107	X
Ø 1600 / 62.9"	H 107 / 4.2"	W 70 / 2.7"	101	7431	25 / 55.1	231.	X X.	X X.	X X.	X X.	X X X.	107	X
Ø 1800 / 70.8"	H 107 / 4.2"	W 70 / 2.7"	114	8153	30 / 66.0	238.	X X.	X X.	X X.	X X.	X X X.	107	X
Ø 2300 / 90.5"	H 107 / 4.2"	W 70 / 2.7"	145	10,747	35 / 77.2	232.	X X.	X X.	X X.	X X.	X X X.	107	X
Ø 2600 / 102.3"	H 107 / 4.2"	W 70 / 2.7"	164	12,838	40 / 88.0	234.	X X.	X X.	X X.	X X.	X X X.	107	X
From H 170 we recommend a second LED row													
Ø 1320 / 51.9"	H 170 / 6.7"	W 70 / 2.7"	83	6539	20 / 44.0	1590.	X X.	X X.	X X.	X X.	X X X.	170	X
Ø 1600 / 62.9"	H 170 / 6.7"	W 70 / 2.7"	101	7993	25 / 55.1	1591.	X X.	X X.	X X.	X X.	X X X.	170	X
Ø 1800 / 70.8"	H 170 / 6.7"	W 70 / 2.7"	114	9043	30 / 66.0	1592.	X X.	X X.	X X.	X X.	X X X.	170	X
Ø 2300 / 90.5"	H 170 / 6.7"	W 70 / 2.7"	145	11,578	35 / 77.2	1593.	X X.	X X.	X X.	X X.	X X X.	170	X
Ø 2600 / 102.3"	H 170 / 6.7"	W 70 / 2.7"	164	12,838	40 / 88.0	1594.	X X.	X X.	X X.	X X.	X X X.	170	X
Ø 3500 / 137.8"	H 170 / 6.7"	W 70 / 2.7"	220	17,320	53 / 117.0	1595.	X X.	X X.	X X.	X X.	X X X.	170	X

LED	Standard:	LED Watt	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Total height	Mounting version
24V	Neutral-white	4000 K	X X X X.	40.	X X.	X X.	X X.	X X X.	X X X.
CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours	Optional:	Natural-white	X X X X.	35.	X X.	X X.	X X.	X X X.	X X X.
		Warm-white	X X X X.	30.	X X.	X X.	X X.	X X X.	X X X.
		Extra warm-white	X X X X.	27.	X X.	X X.	X X.	X X X.	X X X.
		Tunable white*	X X X X.	80.	X X.	X X.	X X.	X X X.	X X X.
		RGB color control*	X X X X.	60.	X X.	00.	X X.	X X X.	X X X.
		RGB + Neutral-White	X X X X.	60.	X X.	40.	X X.	X X X.	X X X.
	*Only available with DMX. Combinations up to two rows of LED possible.								

Dimming	Standard:	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Total height	Mounting version
	0 - 10 V	X X X.	X X.	51.	X X.	X X.	X X X.	X X X.
	Optional: Lutron EcoSystem**	X X X.	X X.	91.	X X.	X X.	X X X.	X X X.
	DMX	X X X.	X X.	31.	X X.	X X.	X X X.	X X X.
	First digit indicates Dimming protocol. Second digit indicates number of rows of LED. Codes shown with 1x row of LED (Standard). For 2x rows of LED replace the second digit accordingly.							
	**Lutron EcoSystem driver must be ordered separately and remote mounted with mounting versions A, C, G, K, R.							

Complete order number

CIRCOLO

L-Version

Housing: Aluminum profile with L-shaped diffuser
 Design: SATTLER, Patented



red dot design award
winner 2009

Design award
SATTLER

Focus Open
Gold 2009

750/900/1320
1600/1800 mm
29.5/35.4/51.9
62.9/70.8°

Housing in 1 part

2300/2600 mm
90.5/102.3°

2 parts

3500 mm
137.8°

3 parts



	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Total height	Mounting version
<p>Finish</p> <div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <p>Standard: 12 white, powder coated, similar to RAL 9003</p> </div> <div style="width: 33%;"> <p>Optional (Powder coated):</p> <div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <p>10 black fine textured</p></div> <div style="width: 33%;"> <p>11 white, similar to RAL 9010</p></div> <div style="width: 33%;"> <p>30 anthracite fine textured</p></div> <div style="width: 33%;"> <p>32 crocodile black</p></div> <div style="width: 33%;"> <p>33 sand silver fine textured</p></div> </div> </div> <div style="width: 33%;"> <p>Optional (Premium):</p> <div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <p>34 bronze satined</p></div> <div style="width: 33%;"> <p>35 gold</p></div> <div style="width: 33%;"> <p>36 brass</p></div> <div style="width: 33%;"> <p>37 bronze fine textured</p></div> <div style="width: 33%;"> <p>38 copper</p></div> </div> </div> <div style="width: 33%;"> <p>22 aluminum polished</p></div> <div style="width: 33%;"> <p>27 brush-finished aluminum</p></div> </div>								

Complete order number


CIRCOLO

L-Version


Housing: Aluminum profile with L-shaped diffuser
 Design: SATTLER, Patented

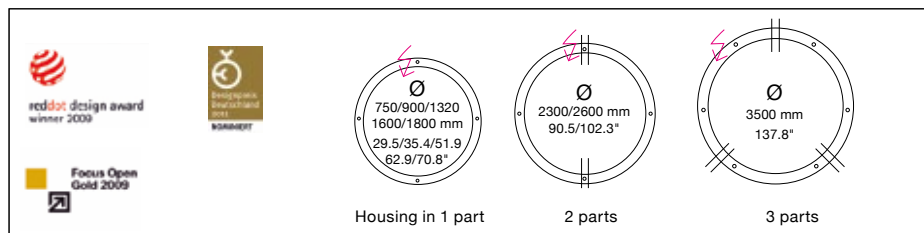


4/6-point suspension with external power supply unit in suspended ceiling




4/6-point suspension with external power supply unit in separate canopy




Up to Ø 1800 mm / 71" 1-point suspended with external power supply unit in ceiling
 (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




Up to Ø 1800 mm / 71" 1-point suspension with external power supply unit in separate canopy
 (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




Up to Ø 1800 mm / 71" suspension through canopy




Up to Ø 1800 mm / 71" 4 current-carrying steel cables suspension through canopy. Only 1 strip LED possible. Not in combination with RGB.




Up to Ø 1800 mm / 71" suspension with current-carrying steel cables and cavity wall box. Includes 1 ceiling fixation per suspension cable. Not in connection with RGB.




Up to Ø 1800 mm / 71" suspension with pendant canopy PB 375 / PB 652 and steel cables
 (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Recommended ceiling height greater than 25 ft.




Up to Ø 1800 mm / 71" suspension with pendant canopy PB 375 / PB 652 and current-carry steel cables
 (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB Recommended ceiling height greater than 25 ft.



Direct ceiling mounting 50 mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50 mm / 1.9" with external power supply unit in separate canopy



Up to Ø 1800 mm / 71" suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Mounting Version

A, B, C, D, G, H, R, K = Distance of external power supply unit to light fixture max. 10m / 394"

E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000 mm/197"; Version F,R,T 3000 mm/118"; Version C,D,S,T 5000 + 3000 mm / 197"+118" and/or power supply cable 5000 mm/197"

Item No. LED Dimming LED Finishes Power supply cable Total height Mounting Version

X X X X	X X	X X	X X	X X	X X X	X X X	-
---------	-----	-----	-----	-----	-------	-------	---

	Power supply units:		
	Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,C,G,R,K (up to Ø 1320 mm)	IP 20
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A,C,G,R,K (up to Ø 2600 mm)	IP 20
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	A,G (up to Ø 3500 mm)	IP 20


Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

	Canopy: (1 LED row)		
	Type / Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B,D,E,F,H (up to Ø 1320 mm)	IP 20
DB 350	Ø 510 / 470 / 60 mm / 20.0 x 18.5 / 2.3"	B,D,E,F,H (up to Ø 2600 mm)	IP 20
DB 510	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	B,H (up to Ø 3500 mm)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S,T (up to Ø 1320 mm)	IP 20
PB 652	Ø 90 H 652 mm / 3.5 x 25.7"	S,T (up to Ø 1800 mm)	IP 20
DB 145	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K (up to Ø 1800 mm)	IP 20

Ø body 90 mm / 3.5"

Color: 12 white, similar RAL 9003,
 contact factory for other finishes
 Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation included with mounting versions A, C, G

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, C, G.

200. 00. 00. 00. 12 (white)

