


FINO PENDANT

Housing: Pendant light, solid Aluminum housing
Design: Ulrich Sattler | Michael Schmidt, Code2design

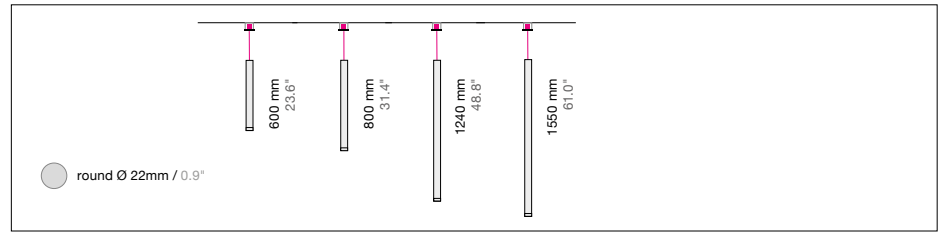

Sizes	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 22 / L 600 mm	Ø 0.9 / L 23.6"	4	365	0.4 / 0.8	1533.	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 22 / L 800 mm	Ø 0.9 / L 31.4"	4	365	0.5 / 1.1	1534.	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	4	365	0.7 / 1.5	1535.	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	4	365	0.8 / 1.7	1536.	x x.	x x.	x x.	x x.	x x x.	x x
LED Constant Current 350mA CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white	3000 K			x x x.	30.	x x.	x x.	x x.	x x x.	x x
		Optional: Neutral-white Extra warm-white	4000 K 2700 K			x x x. x x x.	40. 27.	x x. x x.	x x. x x.	x x. x x.	x x x. x x x.	x x x x
Dimming		Standard: 0 - 10 V				x x x.	x x.	51.	00.	x x.	x x x.	x x
Finish		Standard: 66	Optional: 60			x x x.	x x.	x x.	x x.	--.	x x x.	x x
		66 bronze anodized brushed	60 silver anodized brushed	62 black anodized brushed	65 champ. gold anodized brushed	Optional (Premium): 22 Aluminum polished						
Power supply cable												
	Z 80 black matte						x x x.	x x.	x x.	x x.	x x.	Z80. x x
Mounting version		F Height adjustable on canopy	R		U3							
Standard:	Suspension with canopy DB 72/32 with remote driver and 1 power supply cable 2000mm / 78.7.		Optional: Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in cavity box.		Cover Ø 50mm / 2.0" Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling.	x x x.	x x.	x x.	x x.	x x.	x x x.	--.
				3) an inspection flap is required for the power supply unit								

Canopy:					
Type	Included with Mounting version	Protective rating			
DA 50	Cover Ø 35mm / 1.4" Ceiling cutout 35 mm / 2.0" Power supply unit in suspended ceiling White Similar to RAL 9003 (22 polished)	U3	IP 40		
DB 78/32	Cover Ø 78 mm / 3.0" H 32 mm / 1.2" Power supply unit in in suspended ceiling White Similar to RAL 9003 (22 polished)	F	IP 40		
DA 125	Cover Ø 125mm / 4.9" Ceiling cutout Ø 101.6mm / 4" Power supply unit in suspended ceiling same Color as luminaire	U	IP 40		
				Complete order number	
				Remote driver required ordered separately:	
				Type / Size mm / inch L x W x H	
				0-10V: ECO30W-350 13.25" x 5" x 2.25"	

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**