









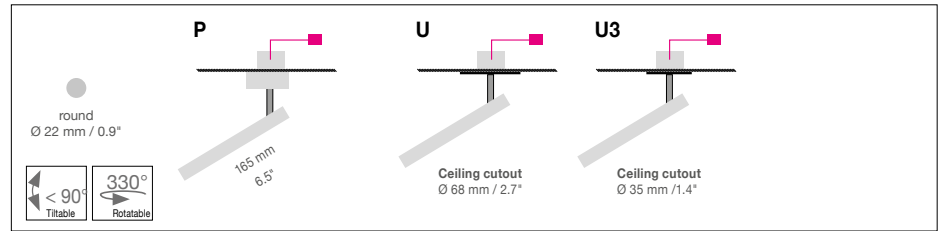





FINO

SPOT 2


Housing: Spotlight, solid Aluminum housing, 330° hinge
Design: Ulrich Sattler



	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Size	Ø 22 / L 165 mm	Ø 0.9 / L 6.5"	4	365	0.4 / 0.88	1539.	x x x.	x x.	x x.	x x.	x x x.	x x
LED Constant Current 350mA CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours	 	Standard: Warm-white 3000 K		x x x.	30.	x x.	x x.	x x.	x x x.	x x		
		Optional: Neutral-white 4000 K Extra warm-white 2700 K		x x x. x x x.	40. 27.	x x. x x.	x x. x x.	x x. x x.	x x x. x x x.	x x x x		
Dimming		Standard: 0 - 10		x x x.	x x.	51.	00.	x x.	x x x.	x x		
Finish	 Standard: 66 bronze anodized brushed  Optional: 60 silver anodized brushed  62 black anodized brushed  65 champ. gold anodized brushed  12 white, powder coated, similar to RAL 9003					x x x.	x x.	x x.	x x.	--.	x x x.	x x
Mounting version	 Standard: Direct ceiling mounting with a remote power supply unit  Optional: U Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in suspended ceiling U3 Cover Ø 50mm / 2.0" Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling					x x x.	x x.	x x.	x x.	x x.	x x x.	--.

Canopy:			
Type	Included with Mounting version	Protective rating	
 DA 50	Cover Ø 50mm / 2.0" Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling Same Color as luminaire An inspection flap is required for the remote power supply unit	U3	IP 40
 DB 78/32	Cover Ø 78 mm / 3.0" H 32 mm / 1.2" Same Color as luminaire	P	IP 40
 DA 125	Cover Ø 125mm / 4.9" Ceiling cutout Ø 101.6mm / 4" Power supply unit in suspended ceiling Same Color as luminaire	U	IP 40

1539.	---	---	00.	---	000.	---
Complete order number						

	Remote driver required ordered separately:
Type / Size mm / inch	L x W x H
0-10V: ECO30W-350 13.25" x 5" x 2.25"	

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**