


FINO SPOT 2

Housing: Spotlight, solid Aluminum housing, 330° hinge
Design: Ulrich Sattler

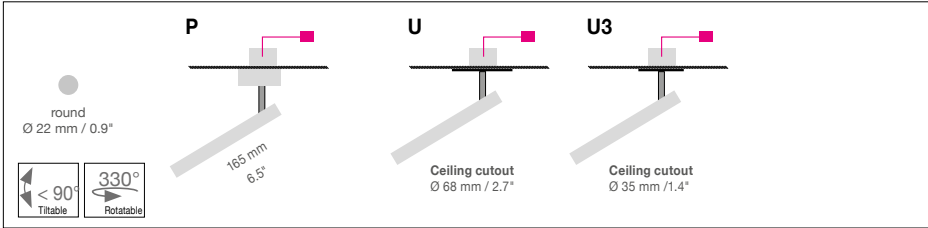

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Size	Ø 22 / L 165 mm	Ø 0.9 / L 6.5"	4	365	0.4 / 0.88	1539.	x x .	x x .	x x .	x x .	x x x .	x x
LED Constant Current 350mA CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white Optional: Neutral-white Extra warm-white	3000 K 4000 K 2700 K			x x x .	30. 40. 27.	x x . x x . x x .	x x . x x . x x .	x x . x x . x x .	x x x . x x x . x x x .	x x x x x x
Dimming		Standard: 0 - 10				x x x .	x x .	11. 00.	x x .	x x .	x x x .	x x
Finish		Standard: 66 bronze anodized brushed Optional: 60 silver anodized brushed 62 black anodized brushed 65 champ. gold anodized brushed 12 white, powder coated, similar to RAL 9003				x x x .	x x .	x x .	x x .	---	x x x .	x x
Mounting version		Standard: Direct ceiling mounting with a remote power supply unit Optional: U Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in suspended ceiling U3 Cover Ø 50mm / 2.0" Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling				x x x .	x x .	x x .	x x .	x x .	x x x .	---

Canopy:		Type	Included with Mounting version	Protective rating
	DA 50	Cover Ø 50mm / 2.0" Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling Same Color as luminaire An inspection flap is required for the remote power supply unit	U3	IP 40
	DB 78/32	Cover Ø 78 mm / 3.0" H 32 mm / 1.2" Same Color as luminaire	P	IP 40
	DA 125	Cover Ø 125mm / 4.9" Ceiling cutout Ø 101.6mm / 4" Power supply unit in suspended ceiling same Color as luminaire	U	IP 40

1539.	---	---	00.	---	000.	---
--------------	-----	-----	------------	-----	-------------	-----

Complete order number

Remote driver required ordered separately:
Type / Size mm / inch L x W x H

0-10V:
ECO30W-350 13.25" x 5" x 2.25"

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**