

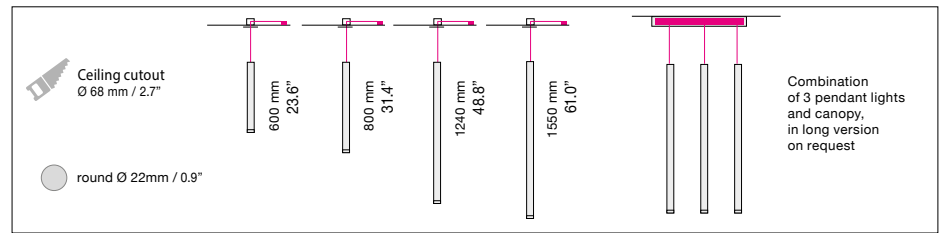
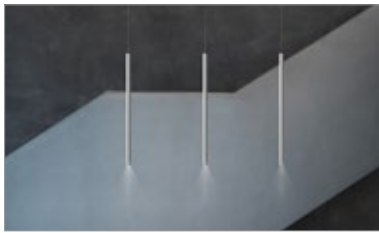


FINO PENDANT


Housing: Pendant light, aluminum housing
Design: Ulrich Sattler | Michael Schmidt, Code2design



	Size: Ø mm	Inches	LED Watt	Lumen ¹	Weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes	Ø 22 / L 600	Ø 0.9 / L 23.6"	4	510	0.4 / 0.8	1533.	x x x.	x x x.	x x x.	x x x.	x x x.	x
	Ø 22 / L 800	Ø 0.9 / L 31.4"	4	510	0.5 / 1.1	1534.	x x x.	x x x.	x x x.	x x x.	x x x.	x
	Ø 22 / L 1240	Ø 0.9 / L 48.8"	4	510	0.7 / 1.5	1535.	x x x.	x x x.	x x x.	x x x.	x x x.	x
	Ø 22 / L 1550	Ø 0.9 / L 61.0"	4	510	0.8 / 1.7	1536.	x x x.	x x x.	x x x.	x x x.	x x x.	x
LED CRI > 90			Warm-white Neutral-white Extra warm-white	3000 K 4000 K 2700 K	(Standard) (Optional) (Optional)	x x x. x x x. x x x.	30. 40. 27.	x x x. x x x. x x x.	x x x. x x x. x x x.	x x x. x x x. x x x.	x x x. x x x. x x x.	x x x
Dimming		Dimmable 0 - 10 V			(Standard)	x x x.	x x x.	51.	00.	x x x.	x x x.	x
Finishes	 66 brushed anodized bronze	(Optional)	 60 silver anodized brushed	 62 brushed anodized black	 65 brushed anodized champ. gold	x x x.	x x x.	x x x.	x x x.		x x x.	x
Power Supply Cable (Standard)	 Z 80 black matte					x x x.	x x x.	x x x.	x x x.	x x x.	Z80.	x
Mounting Version	 1-point straight suspension (2000 mm/78.7" max.) with remote mounted drivers. DA80 canopy.	R Standard				x x x.	x x x.	x x x.	x x x.	x x x.	x x x.	R



Dimensions of canopy
Typ **DA 80**
Size mm / inch
Mounting version R, Ceiling cutout Ø 68 mm / 2.7"
Cover Ø 80 mm 3.1" / installation depth 80 mm / 3.1"
Color white 9003




DBL 390 Mounting version F (Contact factory)
L 390 x W 70 x H 70 mm
L 15.3 x W 2.7 x H 2.7"
Mounts to 4" junction box.
(For Combination of 3 pendant lights.
Consult factory)

x x x.	x x x.	01.	00.	x x x.	Z80.	x
--------	--------	------------	------------	--------	-------------	---

Complete order number

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dry Location Enclosure (Included)

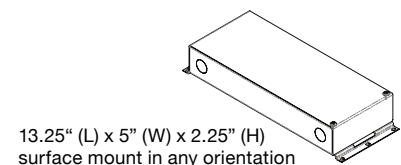

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution
direct



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

Technical data is subject to change. Errors and omissions excepted ¹Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. ²Weight of lights without remote technical unit or canopy.