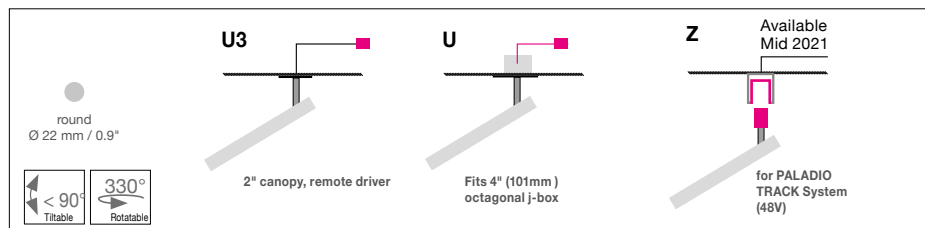















FINO SPOT 2

Housing: Spotlight, solid Aluminum housing, 330° hinge
Design: Ulrich Sattler




	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Size	Ø 22 / L 165 mm	Ø 0.9 / L 6.5"	5	365	0,4 / 0.88	1539.	x x x.	x x.	x x.	x x.	x x x.	x x
LED	 CRI > 90 	Standard: Warm-white		3000 K		x x x.	30.	x x.	x x.	x x.	x x x.	x x
		Optional: Neutral-white		4000 K		x x x.	40.	x x.	x x.	x x.	x x x.	x x
		Extra warm-white		2700 K		x x x.	27.	x x.	x x.	x x.	x x x.	x x
Dimming	Standard: 0-10V		  			x x x.	x x.	51.	00.	x x.	x x x.	x x
Finish	Standard:  66 bronze anodized brushed Optional:  60 silver anodized brushed  62 black anodized brushed  65 champ. gold anodized brushed  12 white, powder coated, similar RAL 9003					x x x.	x x.	x x.	x x.	--	x x x.	x x
Mounting version	 2" for remote driver  5" - Fits 4" octagonal j-box Remote mounted driver  Mounting with adapter for 48V PALADIO TRACK System Available mid 2021					x x x.	x x.	x x.	x x.	x x.	x x x.	--

Canopy:			
Type	For use with Mounting version	Protective rating	
DA 50	2" for remote driver	U3	IP40
DA 125	5" - 4" octagonal j-box	U	IP40
Remote mounted ECO30W-350 LED driver (included in price)			
Input voltage for all external power supply units is 120-277 VAC 50-60 Hz.			

Complete order number

1539.	--	--	00.	--	000.	--
-------	----	----	-----	----	------	----

+ ECO30W-350



Remote mounted driver enclosure
13.25" (L) x 5" (W) x 2.25" (H)
surface mount in any orientation

Maximum Wiring Distance Guide*

Wire Gauge	Maximum Lead Length
18	72 ft (22 m)
16	118 ft (36 m)
14	150 ft (46 m)
12	200 ft (61 m)

*Actual distance must be calculated by installer.
Must comply with NEC code.

