


## GIOCO DIRECT



Housing: Aluminum profile, integrated acrylic cover. Optional acoustic absorber.  
 Design: SATTLER, THEOPHIL EICHLER

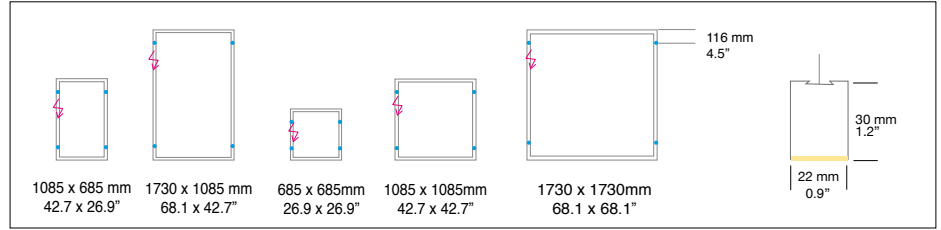


|   | Size: L x W x H mm      | Inches  | LED Watt   | Lumen <sup>1</sup>   | Weight <sup>2</sup> kg / lbs         | Item No.     | LED        | Dimming | LED    | Finish | Power supply cable | Mounting version |
|---|-------------------------|---|--|----------------------|--------------------------------------|--------------|------------|---------|--------|--------|--------------------|------------------|
| <b>Sizes</b>  | <b>1085 x 685 x 30</b>  | <b>42.7 x 26.9 x 1.2"</b>                                 | 63   | 3.480                | 2.8 / 6.17                           | <b>1550.</b> | X X X.     | X X X.  | X X X. | X X X. | X X X.             | X                |
|   | <b>1730 x 1085 x 30</b> | <b>68.1 x 42.7 x 1.2"</b>                                 | 102  | 5.570                | 4.2 / 9.25                           | <b>1551.</b> | X X X.     | X X X.  | X X X. | X X X. | X X X.             | X                |
|   | <b>685 x 685 x 30</b>   | <b>26.9 x 26.9 x 1.2"</b>                                 | 47   | 2.720                | 2.2 / 4.85                           | <b>1552.</b> | X X X.     | X X X.  | X X X. | X X X. | X X X.             | X                |
|   | <b>1085 x 1085 x 30</b> | <b>42.7 x 42.7 x 1.2"</b>                                 | 78   | 4.270                | 3.4 / 7.49                           | <b>1553.</b> | X X X.     | X X X.  | X X X. | X X X. | X X X.             | X                |
|   | <b>1730 x 1730 x 30</b> | <b>68.1 x 68.1 x 1.2"</b>                                 | 125  | 6.870                | 5.2 / 11.46                          | <b>1554.</b> | X X X.     | X X X.  | X X X. | X X X. | X X X.             | X                |
| <b>LED</b><br>24V<br><br>CRI > 90   |                         | <b>Standard</b>   | <b>Warm-white</b>  | <b>3000 K</b>        | X X X.                               | <b>30.</b>   | X X X.     | X X X.  | X X X. | X X X. | X                  |                  |
|   |                         | <b>Optional</b>   | <b>Neutral-white</b>   | <b>4000 K</b>        | X X X.                               | <b>40.</b>   | X X X.     | X X X.  | X X X. | X X X. | X                  |                  |
|   |                         |   | <b>Extra warm-white</b>  | <b>2700 K</b>        | X X X.                               | <b>27.</b>   | X X X.     | X X X.  | X X X. | X X X. | X                  |                  |
|   |                         |   | <b>Tunable white*</b>  | <b>2700 - 6500 K</b> | X X X.                               | <b>80.</b>   | X X X.     | X X X.  | X X X. | X X X. | X                  |                  |
| *(Only in combination with dimming DMX, CASAMBI<br>Approx. 25% less power consumption.) |                         |   |  |                      |                                      |              |            |         |        |        |                    |                  |
| <b>Dimming</b>  |                         | <b>Standard</b>   | <b>Dimmable 0 - 10 V</b>   | X X X.               | X X X.                               | <b>51.</b>   | <b>00.</b> | X X X.  | X X X. | X      |                    |                  |
|   |                         | <b>Optional</b>   | <b>DMX</b>   | X X X.               | X X X.                               | <b>31.</b>   | <b>00.</b> | X X X.  | X X X. | X      |                    |                  |
|   |                         |   | <b>Dimmable CASAMBI</b><br>Bluetooth 4.0 remote control through app. | X X X.               | X X X.                               | <b>81.</b>   | <b>00.</b> | X X X.  | X X X. | X      |                    |                  |
| <b>Finishes</b>   |                         | <b>Standard</b>   | <b>66</b><br>bronze anodized brushed                                 | <b>Optional</b>      | <b>62</b><br>black anodized brushed  | X X X.       | X X X.     | X X X.  | X X X. | .      | X X X.             | X                |
|   |                         |   | <b>65</b><br>champ. gold anodized brushed                            |                      | <b>60</b><br>silver anodized brushed |              |            |         |        |        |                    |                  |
|   |                         |   |  |                      |                                      |              |            |         |        |        |                    |                  |
|   |                         |   |  |                      |                                      |              |            |         |        |        |                    |                  |
|   |                         |   |  |                      |                                      |              |            |         |        |        |                    |                  |
| <b>Power Supply Cable</b>   |                         | <b>Standard</b>   | <b>000</b><br>steel current-carrying suspension cables               |                      |                                      |              |            |         |        |        |                    |                  |
|   |                         | <b>Standard</b><br>(for mounting versions A, B, E, G, H): | <b>Z 78</b><br>silver  |                      |                                      |              |            |         |        |        |                    |                  |

## GIOCO DIRECT


Housing: Aluminum profile, integrated acrylic cover. Optional acoustic absorber.  
Design: SATTLER, THEOPHIL EICHLER

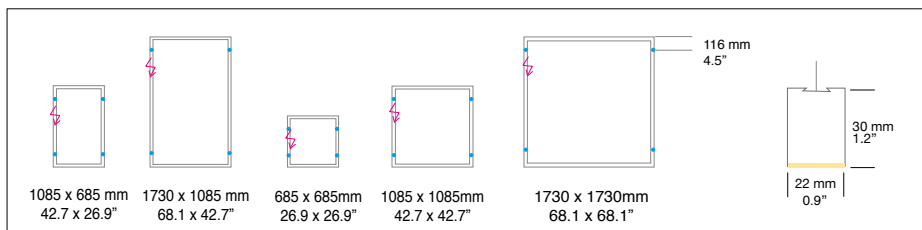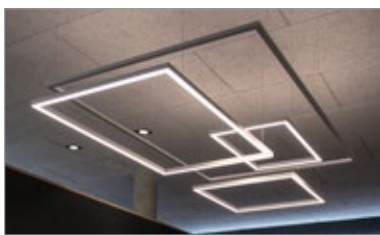


### Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




Suspension through canopy




4 current-carrying steel cables



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension with current-carrying steel cables and cavity wall box. B

Mounting Version F + R not possible in combination with tunable white

| Item No. | LED  | Dimming | LED  | Finishes | Power Supply cable | Mounting Version |
|----------|------|---------|------|----------|--------------------|------------------|
| X X X.   | X X. | X X.    | X X. | X X.     | X X X              | .                |

|        |      |      |      |      |       |   |
|--------|------|------|------|------|-------|---|
| X X X. | X X. | X X. | X X. | X X. | X X X | X |
|--------|------|------|------|------|-------|---|

Complete order number

**Dimensions of technical unit**

| Typ   | Size mm / inch                         | For use with Mounting Version |
|-------|--|-------------------------------|
| DE 1F | 360 x 150 x 85 mm<br>14.2 x 5.9 x 3.3" | A, G, R                       |

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

**Dimensions of canopy**

| Typ    | Size mm / inch  | For use with Mounting Version |
|--------|---|-------------------------------|
| DB 230 | Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"<br>size 685 x 685 mm                     | B, E, F, H                    |
| DB 290 | Ø 290 / 260 / 60 mm / 11.4 / 10.2 / 2.3"<br>size 1085 x 685 and 1085 x 1085 mm  |                               |
| DB 350 | Ø 350 / 320 / 60 mm / 13.7 / 12.5 / 2.3"<br>size 1730 x 1085 and 1730 x 1730 mm |                               |

### Optional




#### CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene, an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

207. 00. 00. 00. 11 (white)

207. 00. 00. 00. 10 (black)



#### Ceiling fixation for mounting version A, G

Ceiling opening for power supply cable. Consists of a cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 11 (white)



#### ACOUSTIC-SET

The ACOUSTIC SET with a highly effective sound absorber can be added to existing GIOCO luminaires at any time  
Sound absorption coefficient  $\alpha_w$  0.9 (Tested according to DIN EN ISO 11654)

|                |              |
|----------------|--------------|
| 1085 x 685 mm  | 42.7 x 26.9" |
| 1730 x 1085 mm | 68.1 x 42.7" |
| 685 x 685 mm   | 42.7 x 26.9" |
| 1085 x 1085 mm | 42.7 x 42.7" |

|                                  |                |
|----------------------------------|----------------|
| 301. 00. 00. 00. 90 (light grey) | 91 (dark grey) |
| 302. 00. 00. 00. 90 (light grey) | 91 (dark grey) |
| 303. 00. 00. 00. 90 (light grey) | 91 (dark grey) |
| 304. 00. 00. 00. 90 (light grey) | 91 (dark grey) |

