










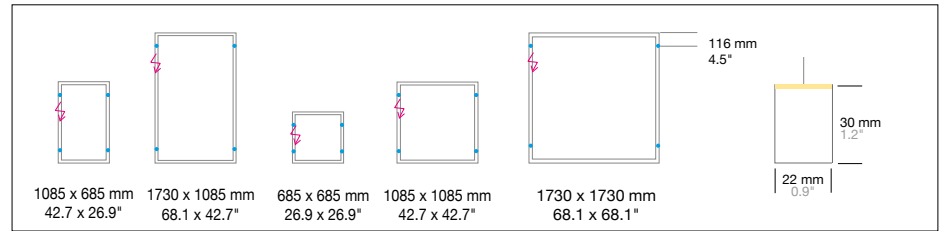

GIOCO INDIRECT


Housing: Aluminum profile, integrated opal diffuser. Optional acoustic absorber.
Design: SATTLER, THEOPHIL EICHLER




	Size: L x W x H mm	Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Mounting version
Sizes	1085 x 685 x 30	42.7 x 26.9 x 1.2"	63	3480	2.8 / 6.17	1560.	x x .	x x .	x x .	x x .	x x x .	x
	1730 x 1085 x 30	68.1 x 42.7 x 1.2"	102	5570	4.2 / 9.25	1561.	x x .	x x .	x x .	x x .	x x x .	x
	685 x 685 x 30	26.9 x 26.9 x 1.2"	47	2720	2.2 / 4.85	1562.	x x .	x x .	x x .	x x .	x x x .	x
	1085 x 1085 x 30	42.7 x 42.7 x 1.2"	78	4270	3.4 / 7.49	1563.	x x .	x x .	x x .	x x .	x x x .	x
	1730 x 1730 x 30	68.1 x 68.1 x 1.2"	125	6870	5.2 / 11.46	1564.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard:	Warm-white	3000 K		x x x .	30.	x x .	x x .	x x .	x x x .	x
		Optional:	Neutral-white	4000 K	x x x .	40.	x x .	x x .	x x .	x x x .	x	
			Extra warm-white	2700 K	x x x .	27.	x x .	x x .	x x .	x x x .	x	
			Tunable white*	2700 - 6500 K	x x x .	80.	x x .	x x .	x x .	x x x .	x	
						*Only available with DMX.						
Dimming		Standard:	0 - 10 V			x x x .	x x .	51.	x x .	x x .	x x x .	x
		Optional:	Lutron EcoSystem**	x x x .	x x .	91.	x x .	x x .	x x x .	x		
			DMX	x x x .	x x .	31.	x x .	x x .	x x x .	x		
			First digit indicates Dimming protocol. Second digit indicates number of rows of LED. Codes shown with 1x row of LED (Standard). For 2x rows of LED replace the second digit accordingly. **Lutron EcoSystem driver must be ordered separately and remote mounted with mounting versions A, G, R.									
Finishes		Standard:				x x x .	x x .	x x .	x x .		x x x .	x
Power supply Cable		Standard:		Optional:	Z 80 Black PVC	x x x .	x x .	x x .	x x .	x x .		x

GIOCO INDIRECT


Housing: Aluminum profile, integrated opal diffuser. Optional acoustic absorber.
Design: SATTLER, THEOPHIL EICHLER

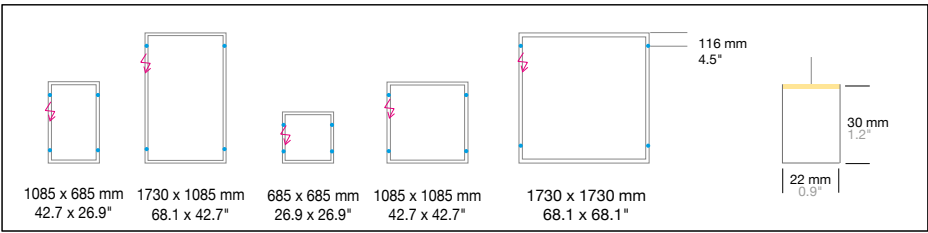


Mounting Version




4-point suspension with external power supply unit in suspended ceiling.




4-point suspension with external power supply unit in separate canopy.




Suspension through canopy.




4 current-carrying steel cables suspension through canopy.



Direct ceiling mounting 50 mm / 1.9" with external power supply unit in suspended ceiling.



Direct ceiling mounting (white) 50 mm / 1.9" with external power supply unit in separate canopy.



Suspension with current-carrying steel cables and cavity wall box. B. Includes 1 ceiling fixation per suspension cable.

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394"

E, F = Minimum suspension height, half of the longest side

Including steel cable suspension 3000 mm/118".

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---


Complete order number

Power supply unit:			
Type / Size mm / inch L x W x H		Included with Mounting version	Protective rating
DE 1F 360 / 150 / 85 mm / 14.2 / 5.9 / 3.3"		A, G, R (1085x685 / 685x685 / 1085x1085 mm)	IP 20
DE 2F 360 / 300 / 85 mm / 14.2 x 11.8 x 3.3"		A, G, R (1730x1085 / 1730x1730 mm)	IP 20

Input voltage for all external power supply units and canopy is 120-277 VAC 47-63 Hz

Canopy:			
Type / Size mm / inch Ø cover plate / body / H		Included with Mounting version	Protective rating
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"		B, E, F, H (1085x685 / 685x685 / 1085x1085 mm)	IP 20
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"		B, E, F, H (1730x1085 / 1730x1730 mm)	IP 20
Canopy mounts to 4" octagonal junction box.			

Optional



Ceiling fixation included with mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Applicable to mounting version A, G